
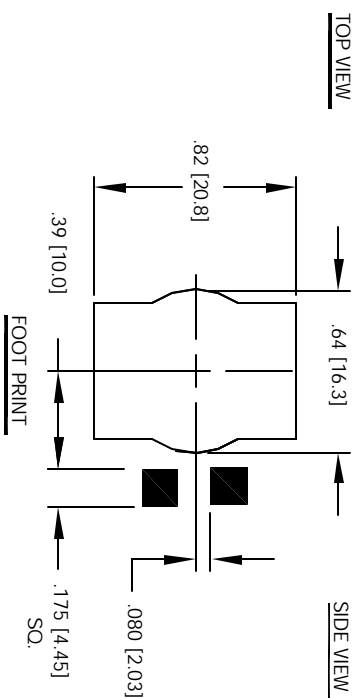



The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	DATE
0		PRODUCTION RELEASE	4/22/05

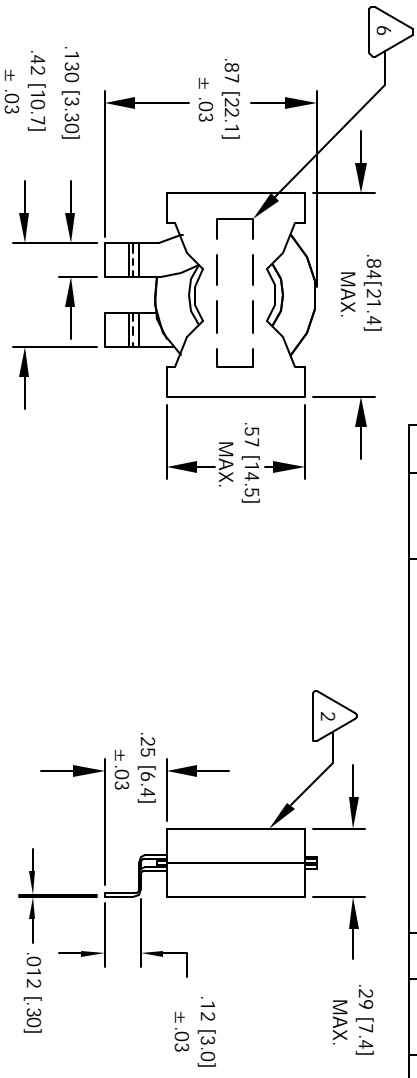

- 3 SPECIFICATIONS @ 25°C  
WIRE: 200°C MIN. RATING HELICAL WOUND MAGNET WIRE  
CWS BYTEMARK OR OTHER APPROVED PART  
CORE: GAPPED PO20 FERRITE
- 2 RATING OF 200°C REQUIRED  
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- 1 NOTES: UNLESS OTHERWISE SPECIFIED, PLANAR INDUCTOR.  
READ FROM BOTTOM UP

QTY	CODE	MFG. P/N	DESCRIPTION	ITEM NO.
	IDENT			
<b>PARTS LIST</b>				
AUTOCAD SOLIDWORKS SIGN		X	CWS Coil Winding Specialist. www.cwswindings.com	
DATE			1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
DRAWN	TKK	4/22/05	<b>TITLE:</b> High Current Output Choke 25 Amps Max <b>SIZE:</b> DWG. NO. CWS-39079 <b>SCALE:</b> 2=1	
CHKD	JLAW	4/22/05		
ENGR	KSUJN	4/22/05		
APPR.	JLAW	4/22/05		
DO NOT SCALE DRAWING				