
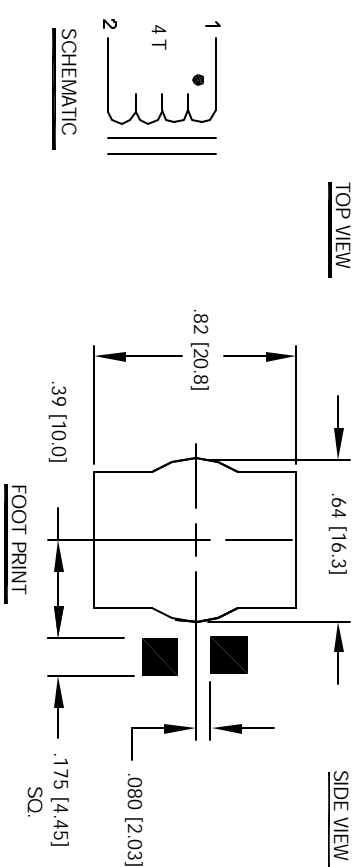


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	DATE
0		PRODUCTION RELEASE	TKK 4/22/05

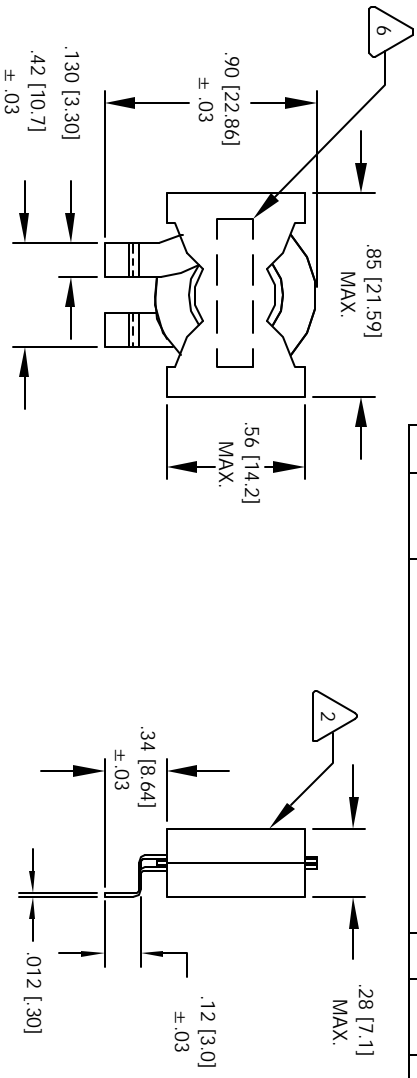

- 1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- 2 WIRE: 200°C MIN RATING, HELICAL WOUND MAGNET WIRE
CWS BYTE-MARK OR OTHER APPROVED PART
CORE: GAPPED PO20 FERRITE
- 3 SPECIFICATIONS @ 25°C

200°C RATING REQUIRED
 200°C MIN RATING, HELICAL WOUND MAGNET WIRE
 CWS BYTE-MARK OR OTHER APPROVED PART
 CORE: GAPPED PO20 FERRITE

NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

EP FORM005 REV 3 10/01

QTY	CODE	MFG. P/N	DESCRIPTION	ITEM NO.
	IDENT		PARTS LIST	
			CWS Coil Winding Specialist.	
			1510 E. Edinger Ave.	
			Unit B, Santa Ana, CA 92705	
			TITLE: High Current Output Choke	
			20 Amps Max.	
			SIZE: DMR. NR. CWS-39764	REV D
			SCALE: 2=1	
				SHEET 1 OF 1

CAD-FILE: