


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	DATE
A		PRODUCTION RELEASE	9/03/04	TLU	9/03/04



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD
 MARK PART NUMBER AND REVISION APPROX



5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY SPACED ON BOBBIN
 CONSTRUCTION:

INSURE INTERGRITY OF WINDING SEPARATION
 HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO
 WIRE SIZE DIAMETER = 0.75 MILLIMETER
 NUMBER OF TURNS = 22
 DCR = 0.05 MILLI-OHMS MAX
 CURRENT RATING = 3.5A AC
 L = 1.00 mH MIN @ 10 KHZ, 0.250 Vrms;
 SPECIFICATIONS @ 25 °C

2 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE
 CWS BYTEMARK OR OTHER APPROVED PART
 CORE: SINGLE PIECE FERRITE H CORE

1 BOBBIN RATING CLASS B (130°) REQUIRED
 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
 NOTES: UNLESS OTHERWISE SPECIFIED.

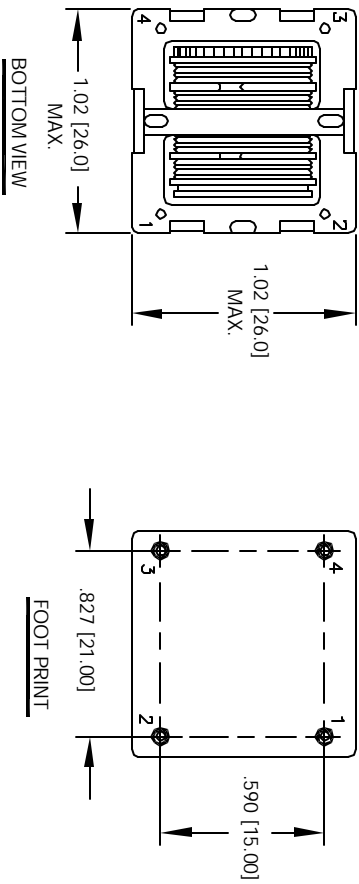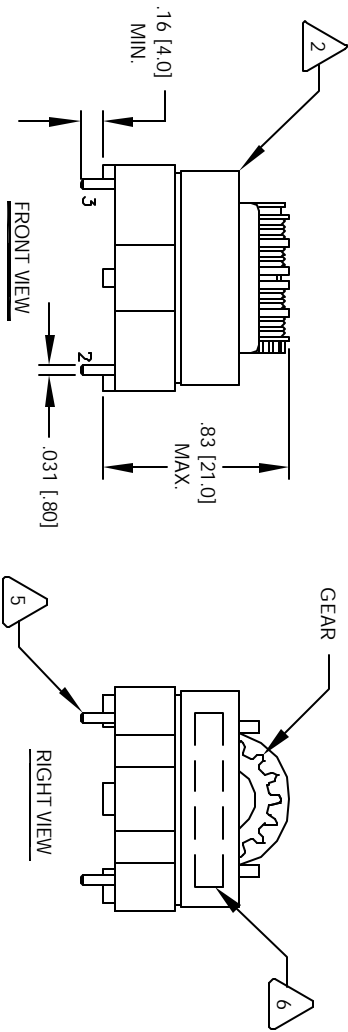

QTY	UM	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
				PARTS LIST	
AUTOCAD SOLIDWORKS SIGN			X		
UNLESS OTHERWISE SPECIFIED					
PAINSPRING AND TOLERANCE PER ANSI Y14.5M					
ALL DIMENSIONS ARE IN INCHES AND DIMENSIONS ARE IN METERS					
TOLERANCE ANGLES					
XXXX±.010 .XX±.015					
TOLERANCE METERS					
XXXX±.254 .XX±.008					
ANGLE PRECISION					
DO NOT SCALE DRAWING					
DRAWN	RFR	6/03/04	TITLE: Common Mode Line Filter		
CHKD	JLU	6/03/04	Horizontal Mount		
ENGR	KSUM	6/03/04	SIZE	DWG. NO.	REV
APPR.	JLU	6/03/04	B	24H_1K0	A
			SCALE	1=1	SHEET 1 OF 1

CWS Coil Winding Specialist
 1510 E. Edinger Ave
 Unit B, Santa Ana, CA 92705
 WWW.COILWS.COM