
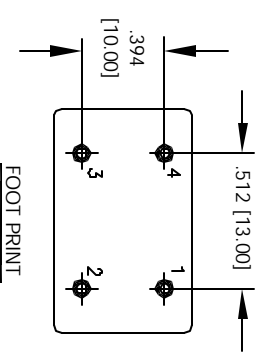
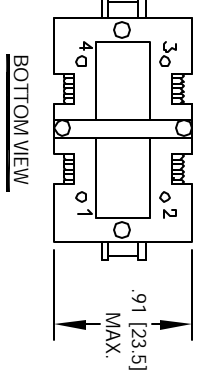
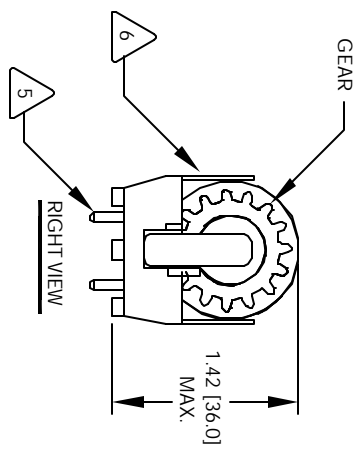
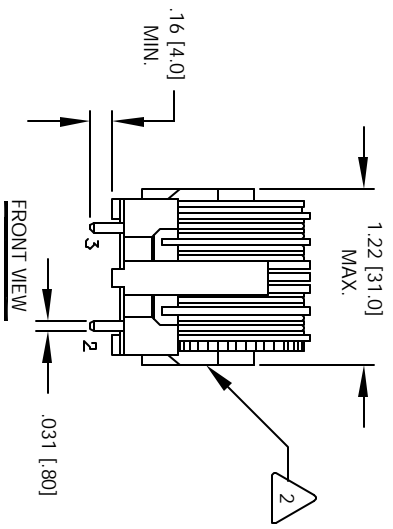


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRODUCTION RELEASE	9/03/04	JLU		9/03/04



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD
 MARK PART NUMBER AND REVISION APPROX

5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY SPACED ON BOBBIN
 CONSTRUCTION:

INSURE INTEGRITY OF WINDING SEPARATION
 HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO
 WIRE SIZE DIAMETER = 0.6 MILLIMETER
 NUMBER OF TURNS = 60
 DCR = 0.22 MILLIOHMS MAX
 CURRENT RATING = 2.0A AC
 L = 10.00 mH MIN @ 10 KHZ, 0.250 Vrms;
 3 SPECIFICATIONS @ 25 °C

2 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE
 CWS BYTEMARK OR OTHER APPROVED PART
 CORE: SINGLE PIECE FERRITE H CORE

1 BOBBIN RATING CLASS B (130°) REQUIRED
 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED
PALDWORKING AND TOLERANCE PER ANSI Y14.5M
ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
TOLERANCE ANGLES: .000E+010 .XXE+015 .XXXE+024 .XXXE+028
ANGLE PRECEDENCE
DO NOT SCALE DRAWING

QTY	UM	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
		X		PARTS LIST	
				COILS.COM, INC	
				CWS Coil Winding Specialist.	
				1510 E. Edinger Ave.	
				Unit B, Santa Ana, CA 92705	
TITLE:				Common Mode Chokes	
DRAWN	RRR	6/03/04			
CHKD	JLU	6/03/04			
ENGR	KSUM	6/03/04			
APPR	JLU	6/03/04			
SIZE: DIM. IN.				28V_10K	REV A
SCALE: 1=1				SHEET 1 OF 1	