

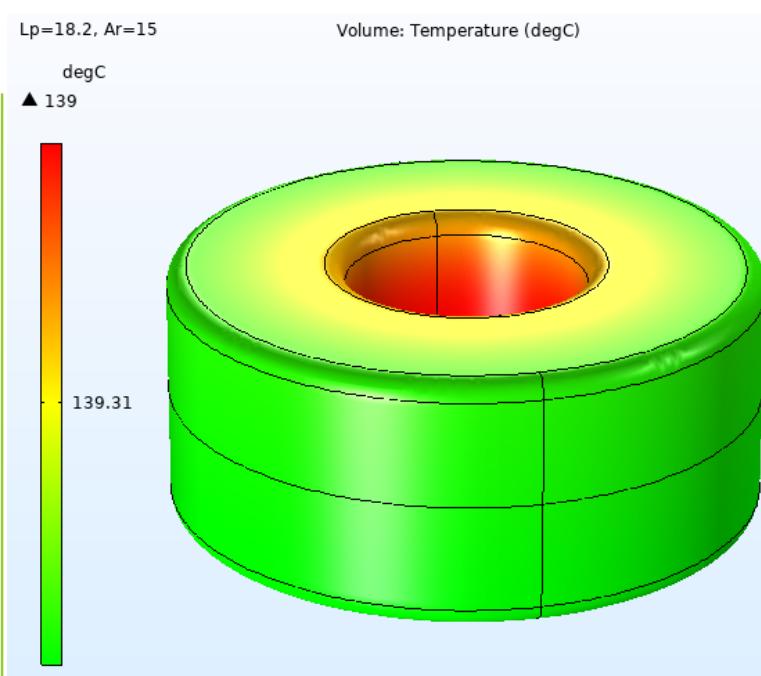
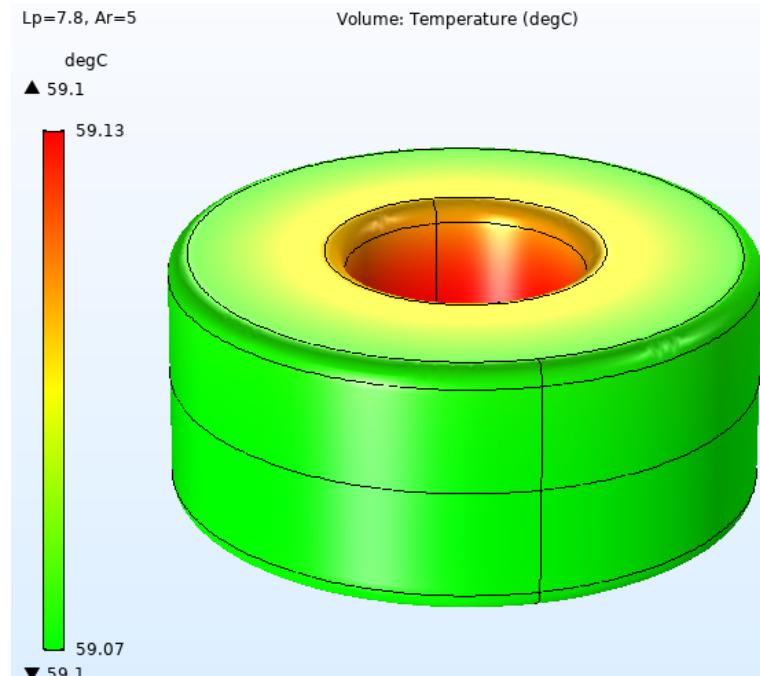


Thermal and Electromagnetics simulation – Part # HF467-102M-26A – Current rated 26A @ 1kHz

Lp=7.8, Ar=5
degC
▲ 59.1
59.13
Current 30%
(7.8A)
No Airflow
Natural convection
59.07
▼ 59.1

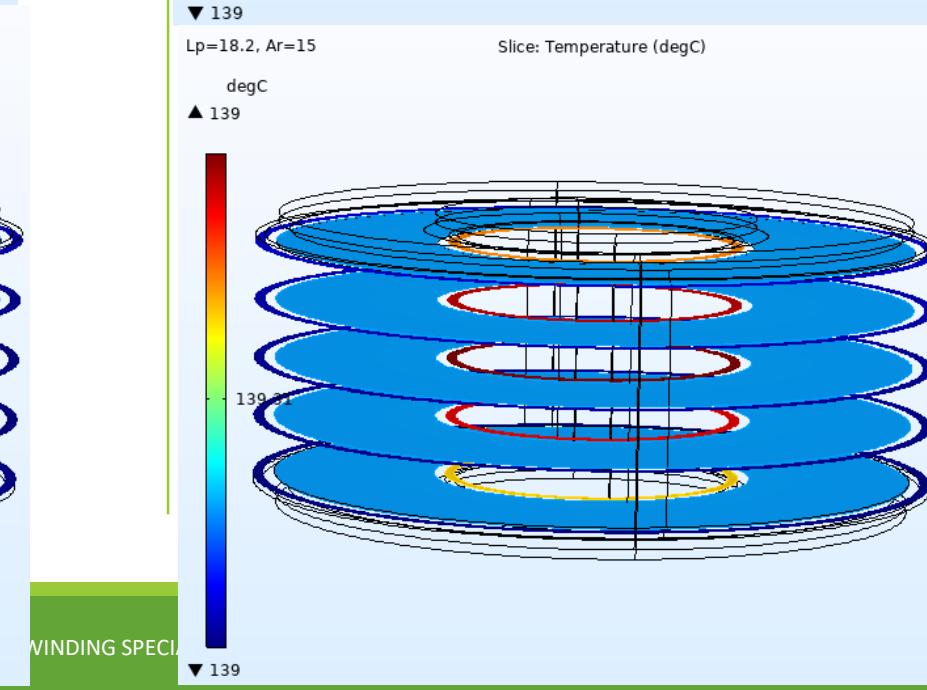

Current 70% (18.2A)
15 W/ (m²K) or 3
m/s air flow.

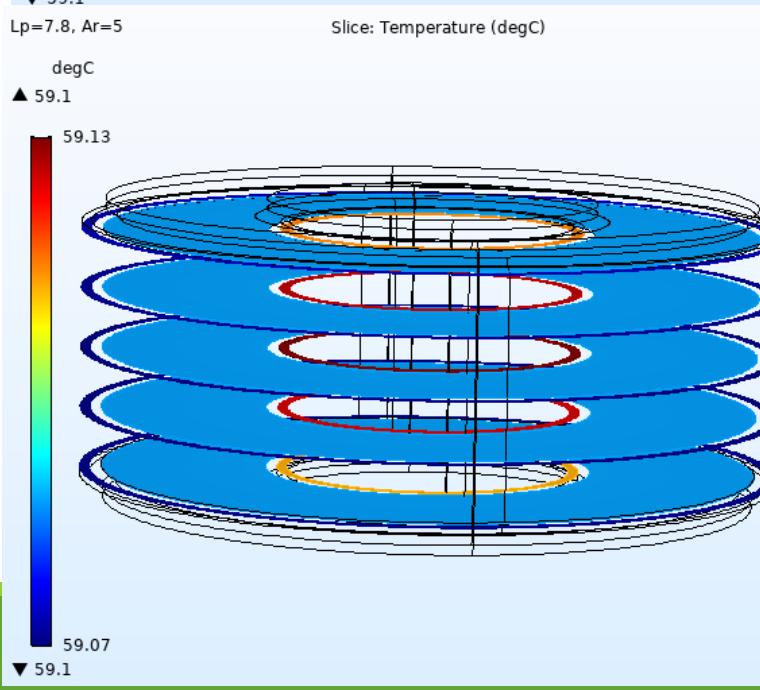




WINDING SPECI

Thermal and Electromagnetics simulation -- Part # HF467-102M-26A -- Current rated 26A @ 1kHz



L_p=18.2, Ar=15

Multislice: Magnetic flux density norm (T)

T
▲ 0.02
 $\times 10^{-3}$

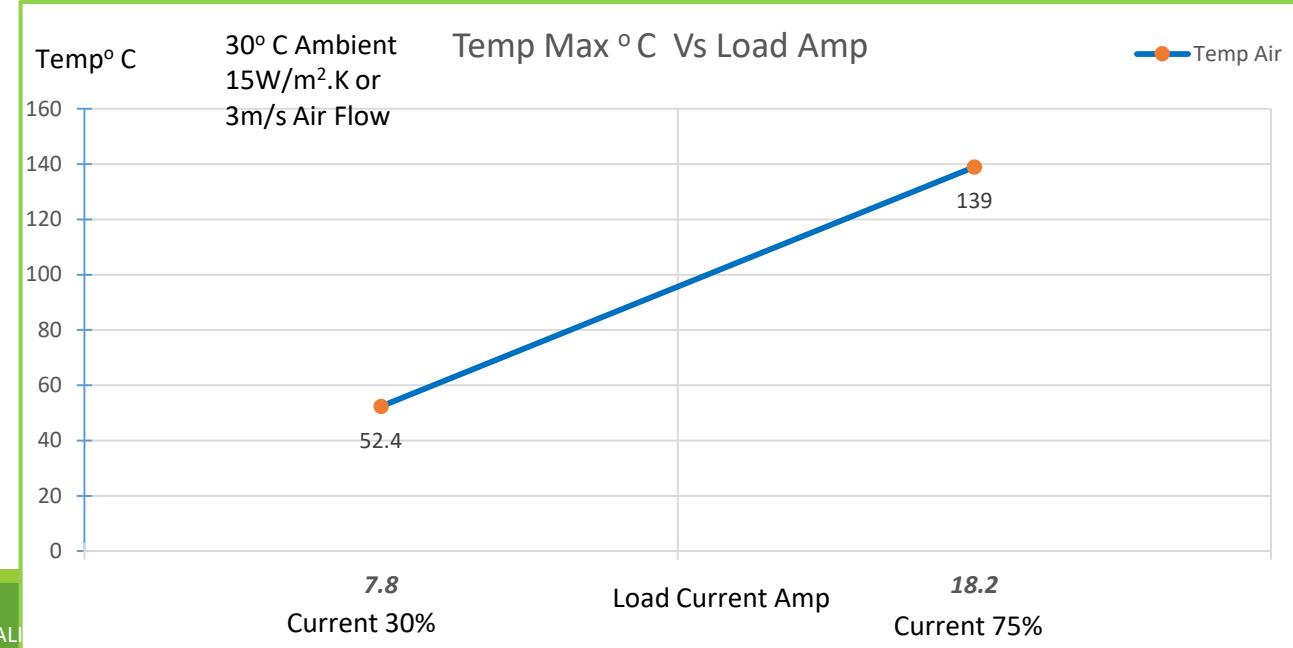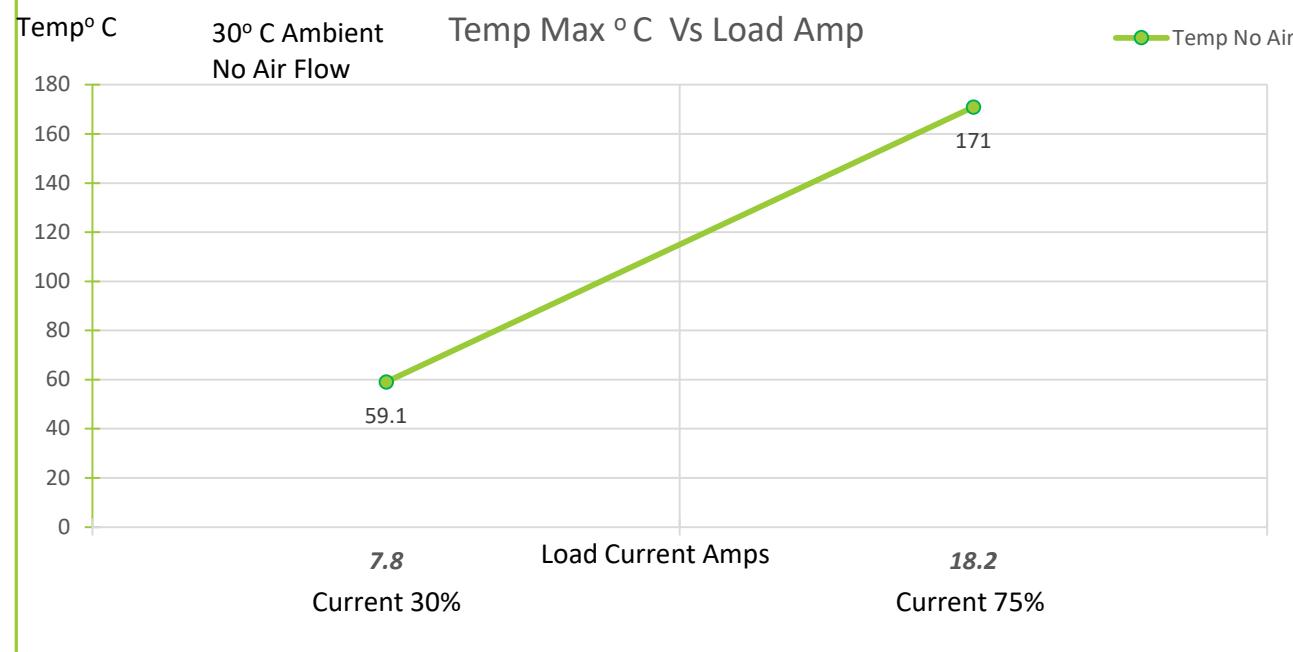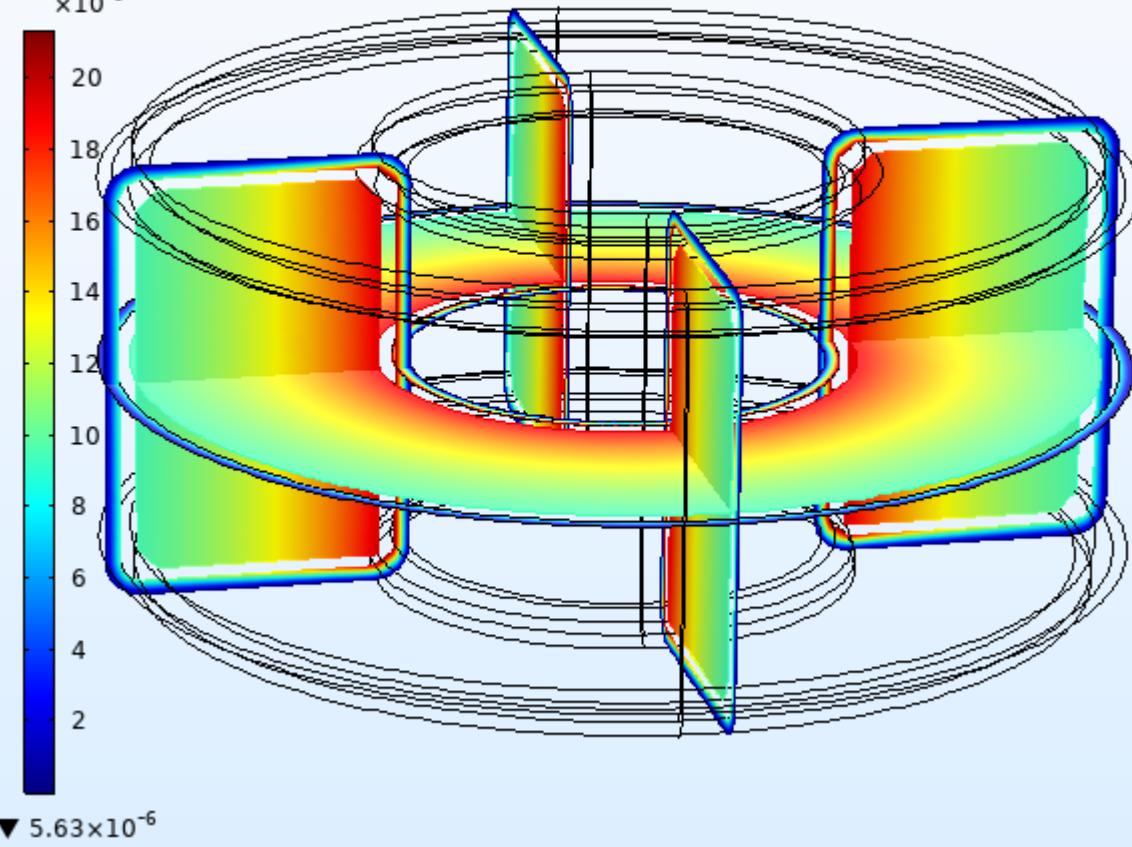

Thermal and Electromagnetics simulation -- Part # HF467-102M-26A -- Current rated 26A @ 1kHz

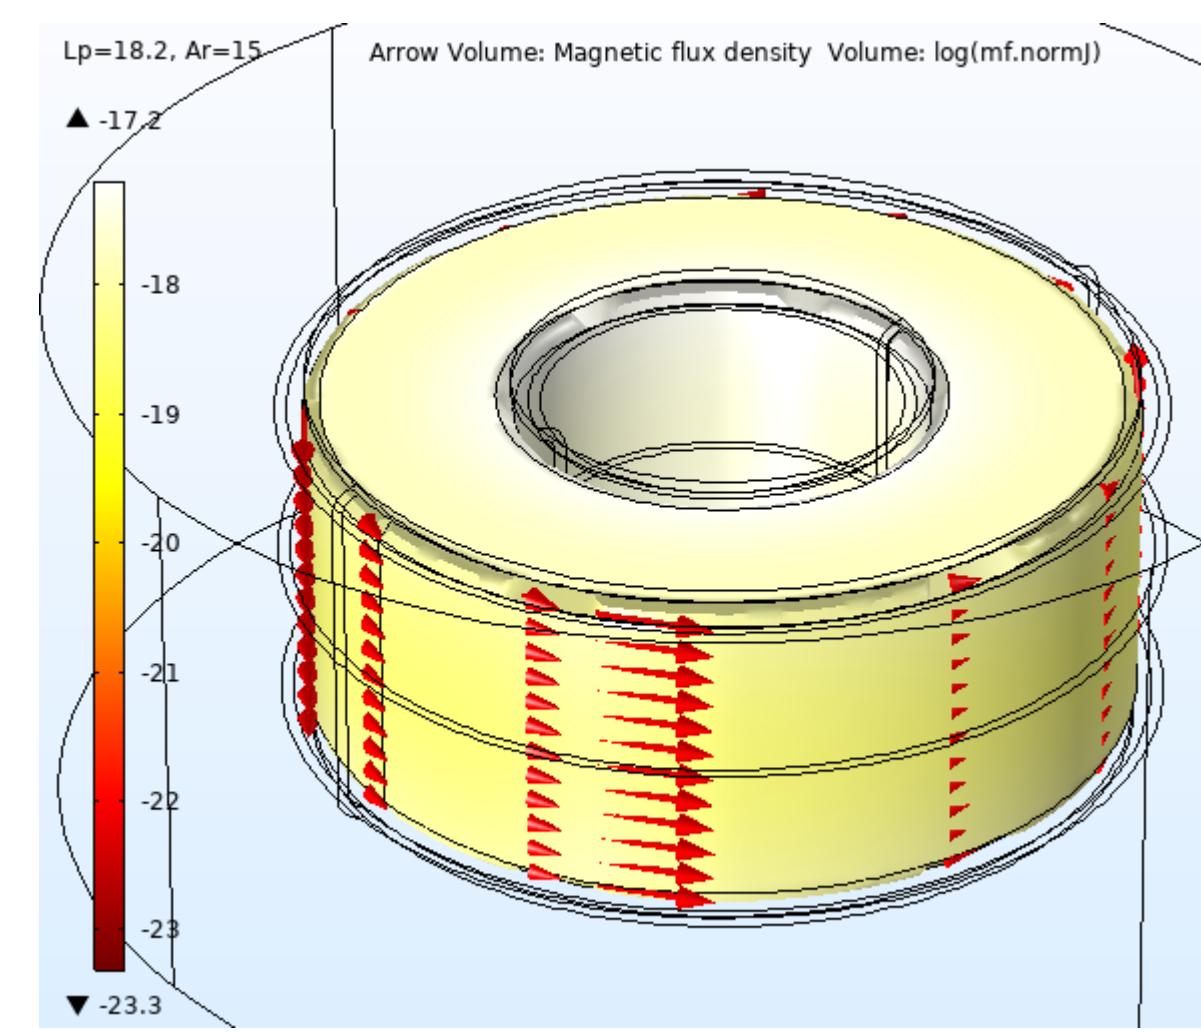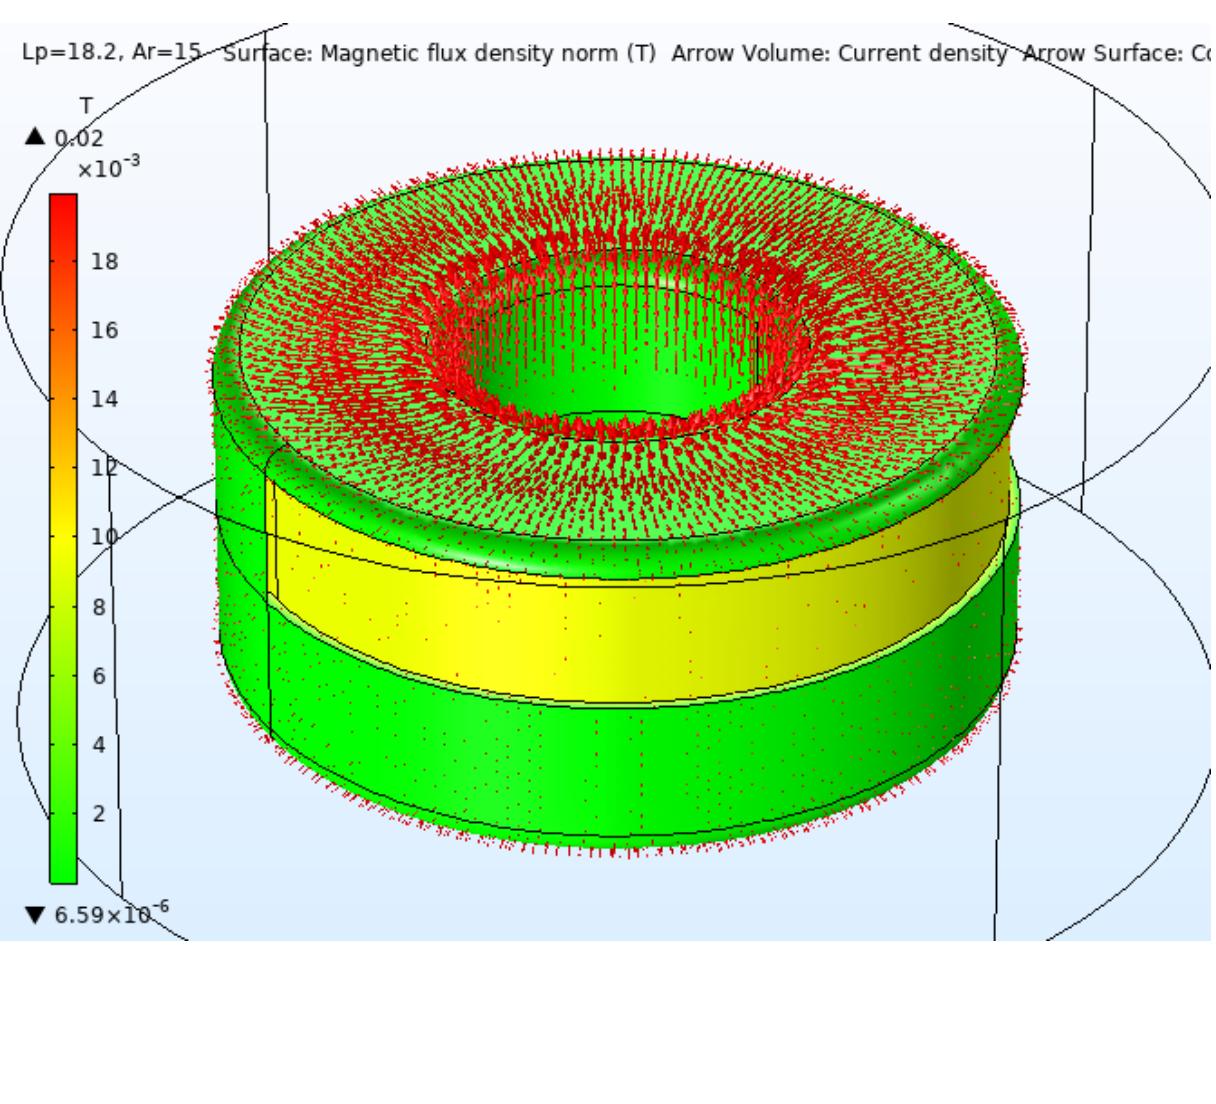

Abbreviations

Ld	: Current rated Amps
Ar	: Airflow
W/m ² .K	: Watts / Sq meter .Kelvin – Heat Convection rate
m/s	: Meter/ Second - Airflow
degC	: Temperature in Deg C
T	: Tesla – Magnetic Flux density
Temp	: Temperature
Temp max:	Temperature Maximum
Amb	: Ambient Temperature
Amps	: Ampere Load current.
Slice	: Sectional view

Disclaimer :

- Simulation MODEL is an effective tool for evaluating product performance by simulation; however, it does not simulate product performance in all test environments and is not intended to be a replacement for testing of the actual device by means of a test board or otherwise.
- Simulation results are for reference purposes only; CUSTOMER shall perform thorough testing using the actual device.