




The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	SIGN & DATE		
			BY	DATE	CHK
A		PRE-PRODUCTION RELEASE	TKK	4/20/03	JLU





6 MARK PART NUMBER AND REVISION APPROX

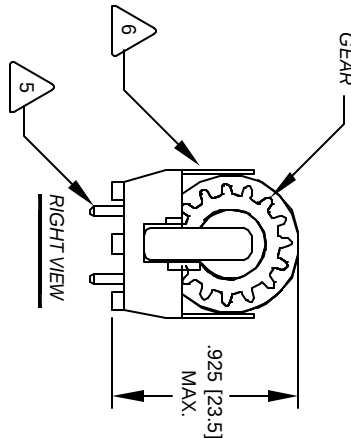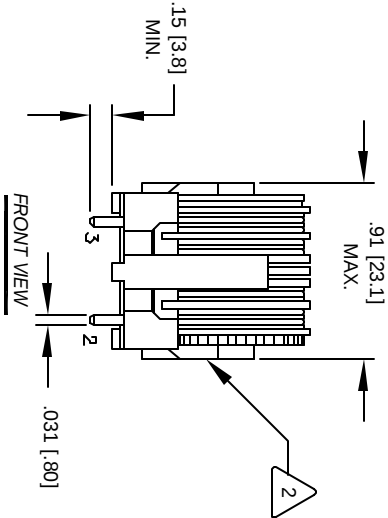

5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY ON BOBBIN CONSTRUCTION:

INSURE INTEGRITY OF WINDING SEPARATION
HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO DCR = MEASURED USING QUADTECH 2200
L = MEASURED AT 10 KHZ, < 1 Vrms;
SPECIFICATIONS:

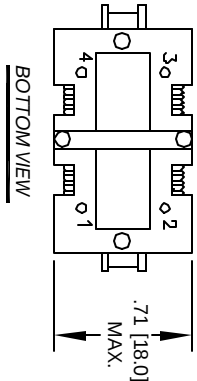

2 WIRE: UL RECOGNIZED 200° RATING MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
CORE: SINGLE PIECE FERRITE H CORE

BOBBIN RATING CLASS B (130°) REQUIRED
1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
NOTES: UNLESS OTHERWISE SPECIFIED.

QTY	UM	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
PARTS LIST					
AUTOCAD		X			
SOLIDWORKS					
SIGN		DATE			
DRAWN		4/20/03			
TKK					
CHECKED		4/21/03			
JLU					
DRAWN		4/21/03			
KSUM					
APPROVED		4/21/03			
JLU					
			SIZE	DATE	REV
			B	20V_SERIES	A
			SCALE	1 = 1	SHEET 1 OF 1