


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKK	6/25/05	JLJU	6/25/05
B		REVISE DIMENSION		12/5/08		12/5/08

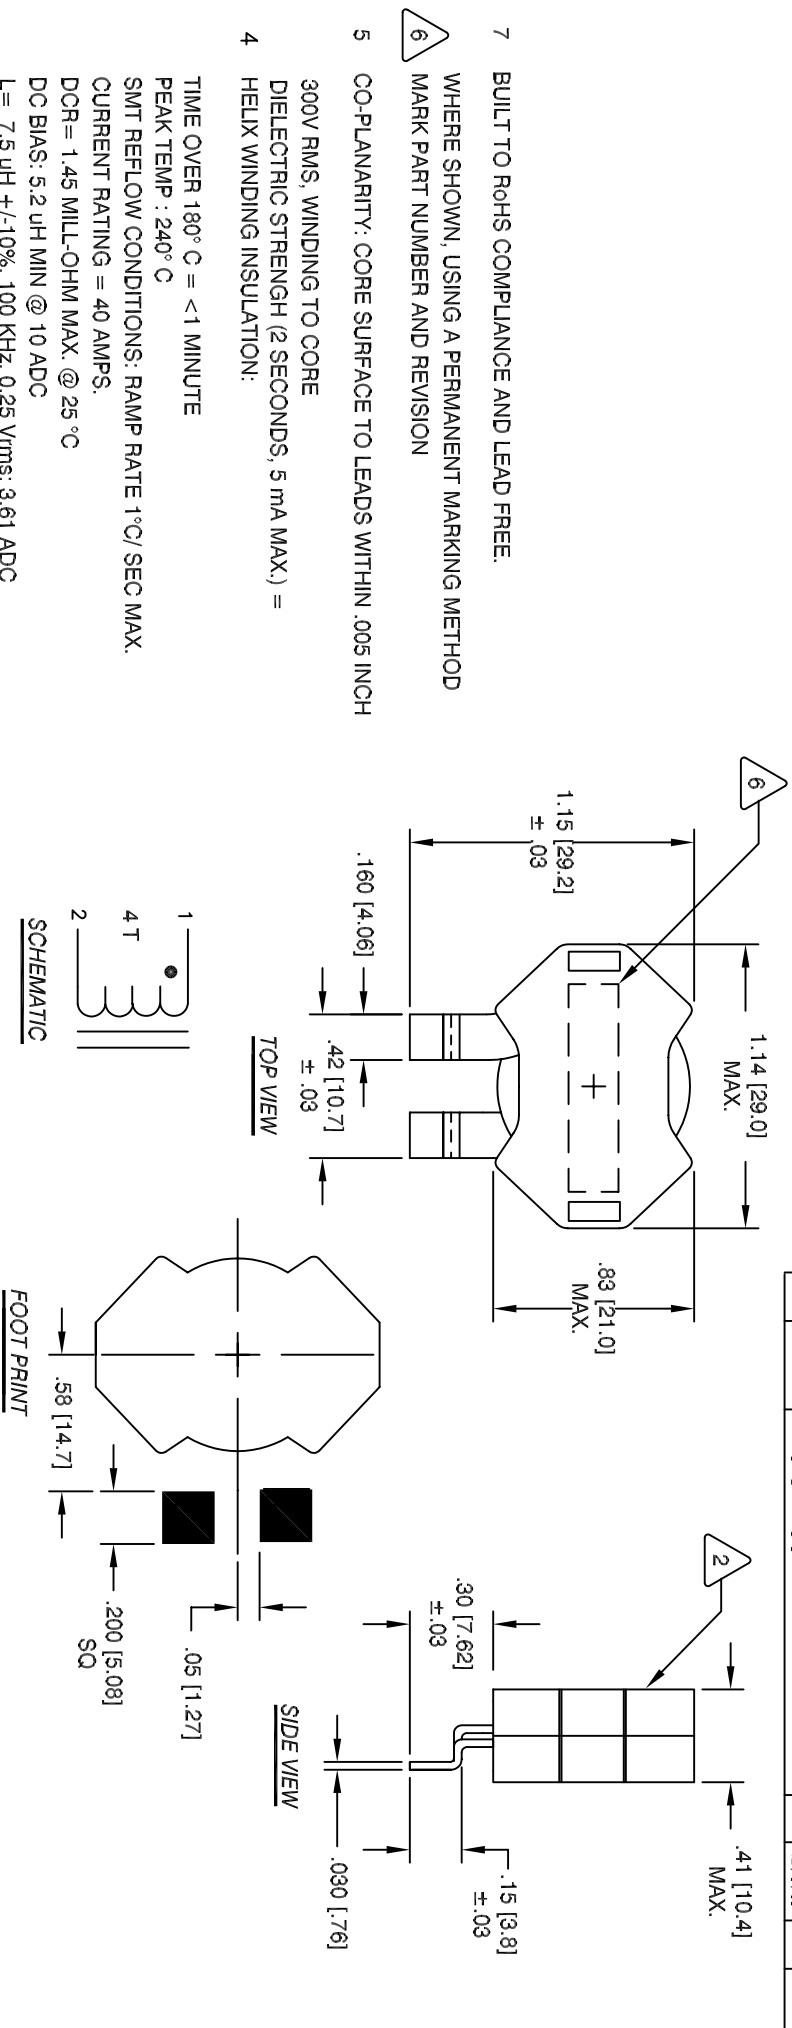

- 3 SPECIFICATIONS @ 25°C
- 2 WIRE: 200°C MIN. RATING HELICAL WOUND MAGNET WIRE  
CWS BYTEMARK OR OTHER APPROVED PART  
CORE: GAPPED RM10 FERRITE

- 1 RATING OF 200°C REQUIRED  
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- NOTES: UNLESS OTHERWISE SPECIFIED, PLANAR INDUCTOR.  
READ NOTES FROM BOTTOM TO TOP.

QTY	CODE IDENT	MFQ. P/N	DESCRIPTION	ITEM NO.
			<b>PARTS LIST</b>	
	AUTOCAD	X		
	SOLIDWORKS			
	SIGN	DATE		
	DRWNN	6/25/05		
	CHKD	6/25/05		
	ENGR.	6/25/05		
	APPR.	6/25/05		
	SIZE	DWG. NO.		
	B	CWS-38366		
	SCALE	2=1		
	SHEET	1 OF 1		

**COLLWS COM, INC**  
www.collws.com  
CWS Coil Winding Specialist  
353 W. GROVE AVE  
ORANGE, CA 92865

**High Current Output Choke**  
40 Amps Max