


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKK	2/28/05	JLAV	2/29/05



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD  
 MARK PART NUMBER AND REVISION IN APPROX




5 REMOVE INSULATION AND TIN LEADS

4 CONSTRUCTION:  
 HI-POT CORE TO WIRE = 750 VDC  
 MAX TEMP RISE AT RATED CURRENT = 35 °C

3 SPECIFICATIONS @ 25°C  
 DCR = 61.0 MILLI-OHMS MAX  
 MAX L DROP AT RATED CURRENT = 5%  
 RATED CURRENT (DC) = 4.9 AMPS.  
 L = 100.0 uH ± 10% @ 1KHz, 0.25 mV, 0 ADC

2 CORE: FERRITE ROD

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

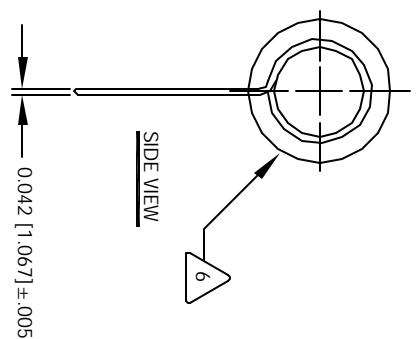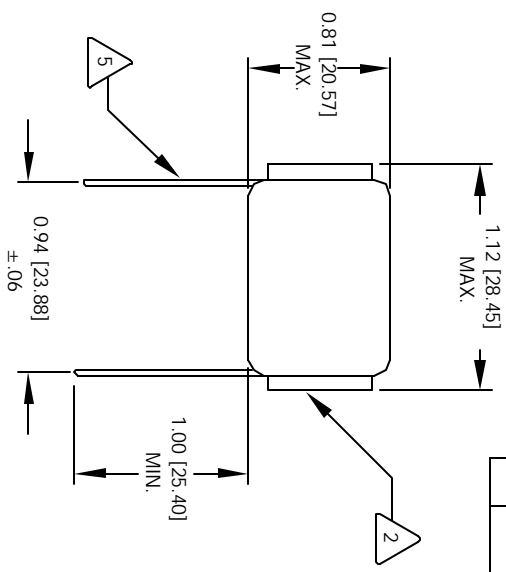

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SIGN	X	PARTS LIST	
SOLIDWORKS SIGN			
DATE	DATE		
2/28/05	2/28/05		
TKK	JLAV		
2/28/05	2/28/05		
JLAV	2/28/05		
2/28/05	2/28/05		

High Current RF Chokes

J-5505

2=1

SHEET 1 OF 1

EP FORM0005 REV 3 10/01

CAD-FILE: