
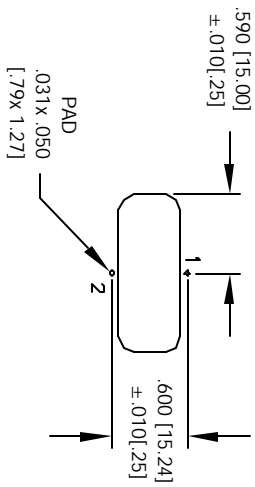
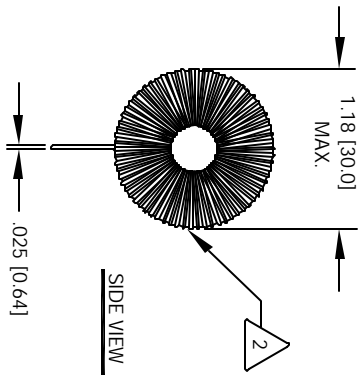
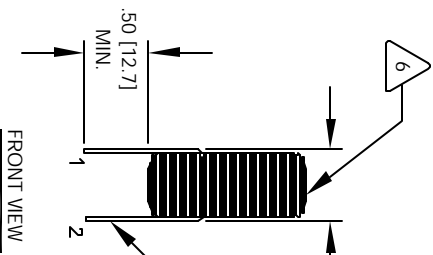


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRE-PRODUCTION RELEASE	6/03/03	TKK	JLU	6/04/03



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION IN APPROX

5 TO THE CORE MUST REST FLAT ON PCB). LEADS MUST BE TANGENT FLUSH WITH THE COIL EDGE, AS SHOWN (I.E. COIL REMOVE INSULATION AND TIN LEADS APPROX. .50 INCH

4 WIND CORE EVENLY SPACED CONSTRUCTION:

3 TO INSURE INTERGRITY OF WINDING INSULATION HI-POT TEST FOR ISOLATION, 750 VDC DCR = MEASURED USING QUADTECH 2200 @ 0.5 DC OHM L = MEASURED AT 2.9mH ±20% SPECIFICATIONS:

2 APPROVED PART OUTER WRAP: 3M OR OTHER CWS WIRE: UL RECOGNIZED 155°C RATED MAGNET WIRE CWS BYTEMARK OR OTHER APPROVED PART CORE: IRON POWDER

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY NOTES: UNLESS OTHERWISE SPECIFIED.

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
			COILS.COM, INC	
			CWS Coil Winding Specialist	
			1510 E. Edinger Ave	
			Unit B, Santa Ana, CA, 92705	
			TITLE:	
			Open Toroidal Chokes	
			SIZE:	
			1/4" B	
			SCALE:	
			1=1	
			REV A	
			SHEET 1 OF 1	