
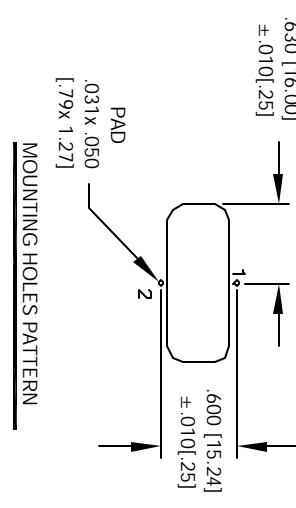
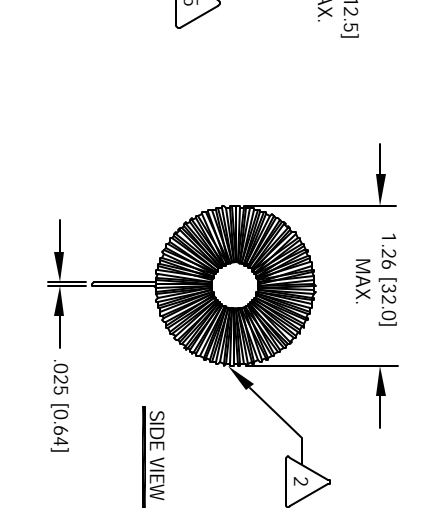
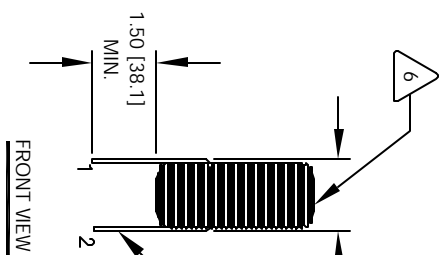


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRE-PRODUCTION RELEASE	6/03/03	TKK	JLU	6/04/03



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD  
MARK PART NUMBER AND REVISION IN APPROX

5 LEAD MUST BE TANGENT TO THE CORE  
COIL MUST REST FLAT ON PCB.  
FROM TIP OF WIRE. USE AWG #22  
REMOVE INSULATION AND TIN LEADS APPROX. .50 INCH

4 WIND CORE EVENLY SPACED  
CONSTRUCTION:

3 TO INSURE INTERGRITY OF WINDING INSULATION  
HI-POT TEST FOR ISOLATION, 750 VDC  
DCR = MEASURED USING QUADTECH 2200 @ 0.4 DC OHM  
L = MEASURED AT 2.4mH ±20%  
SPECIFICATIONS:

2 APPROVED PART  
OUTER WRAP: 3M OR OTHER CWS  
WIRE: UL RECOGNIZED 155°C RATED MAGNET WIRE, AWG #22  
CWS BYTEMARK OR OTHER APPROVED PART  
CORE: IRON POWDER

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY  
NOTES: POWER HANDLING AT 240 V = 500 WATTS  
DESIGNED TO MEET UL 1283 AND EN 133200 APPROVALS

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			<b>PARTS LIST</b>	
			CWS Coil Winding Specialist.	
			1510 E. Edinger Ave.	
			Unit B, Santa Ana, CA, 92705	
TITLE: <b>Open Toroidal Chokes</b>				
DRAWN: TKK DATE: 6/05/03				
CHECKED: JLU DATE: 6/05/03				
ENGR: KSIUM DATE: 6/05/03				
APPR: JLU DATE: 6/05/03				
SCALE: <b>B</b>				
SIZE: DIM. IN. <b>CWS-1123</b>				
SCALE: <b>1=1</b>				
SHEET <b>1</b> OF <b>1</b>				