

The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.





REVISION HISTORY		SIGN & DATE		
REV	ECN	DESCRIPTION	BY	DATE
B		PRODUCTION RELEASE	RPB	8/26/05
			JLJU	8/26/05

- 7 BUILT TO ROHS COMPLIANCE AND LEAD FREE.
- WHERE SHOWN
- IF APPLIANCE, MARK PART NUMBER
- 6 FLUSH WITH THE COIL EDGE, AS SHOWN
- 5 REMOVE INSULATION AND TIN LEADS APPROX. 0.5 INCH
- WIND ON EACH SIDE TO CORE AND EVENLY SPACED
- 4 CONSTRUCTION:

- TEMP RANGE = -25 °C. TO 120°C
- MAX TEMP RISE = 25 °C
- TEST VOLTAGE = 2000 VAC, 1 MIN.
- 5 MILLI-OHMS PER COIL MAX.
- DCR = 10 MILLI-OHMS MAX. OR
- RATED VOLTAGE = 250 VAC OR VDC
- RATED CURRENT = 9 AMPS
- L = 0.600 MH MIN., 10 KHZ, 0.250 Vrms, 0 ADC
- INSULATION RESISTANCE = 100 MEGA-OHMS MIN. @ 500 VDC
- 3 SPECIFICATIONS AT 25°C:

- APPROVED PART
- WIRE: UL RECOGNIZED 130°C. RATED MAGNET WIRE
- CWS BYTEMARK OR OTHER APPROVED PART, u=2000
- 2 CORE: FERRITE TOROID, HIGH PERM MNZN
- BOBBIN RATING CLASS B (130°C) REQUIRED
- 1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

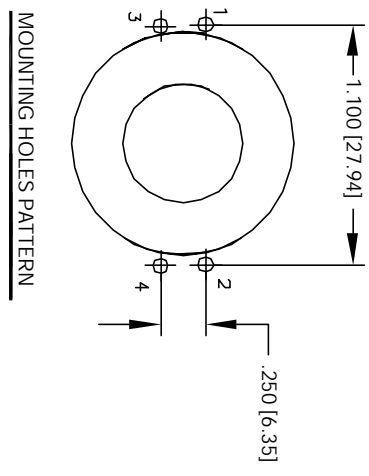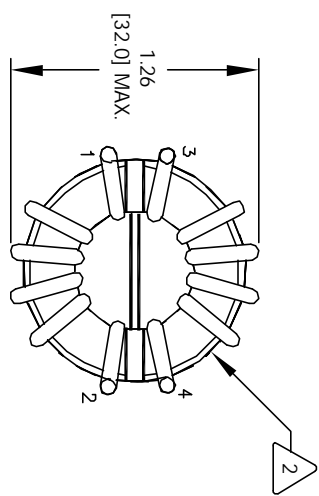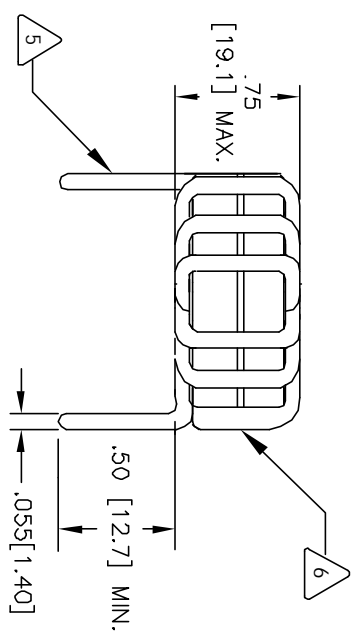

QTY	CODE	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
	AUTOCAD	X		
	SOLIDWORKS			
	SIGN	DATE		
	DRAWN	8/26/05		
	CHKD	8/26/05		
	ENGR.	8/26/05		
	APPR.	8/26/05		
TITLE		SIZE	TITLE	
		B	Common Mode Chokes	
		B	Horizontal Mount	
		B	HL-H-601U-9B	
		2=1	REV B	
			SHEET 1 OF 1	