

The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	DATE
C		PRODUCTION RELEASE	9/08/04

6 WHERE SHOWN, USING A PERMANENT MARKING METHOD IF APPLICABLE, MARK PART NUMBER AND REVISION




5 FLUSH WITH THE COIL EDGE, AS SHOWN REMOVE INSULATION AND TIN LEADS

4 WIND ON EACH SIDE OF CORE AND EVENLY SPACED CONSTRUCTION:

- TEMP RANGE = -25 °C TO 120 °C
- MAX TEMP RISE = 34.4 °C
- TEST VOLTAGE = 2000 VAC, 1 MIN
- RATED VOLTAGE = 250 VAC OR VDC
- RATED CURRENT = 2 AMPS
- DCR = 0.1518 OHMS MAX
- L = 3.0 mH MIN., 50 Hz - 400 KHz, 0.250 Vrms, 0 ADC
- INSULATION RESISTANCE = 100 MEGA-OHMS MIN. @ 500 VDC
- SPECIFICATIONS AT 25 °C

2 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE CWS BYTE-MARK OR OTHER APPROVED PART CORE: FERRITE TOROID.

BOBBIN RATING CLASS B (130°C) REQUIRED
1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
NOTES: UNLESS OTHERWISE SPECIFIED, COMMON MODE CHOKE

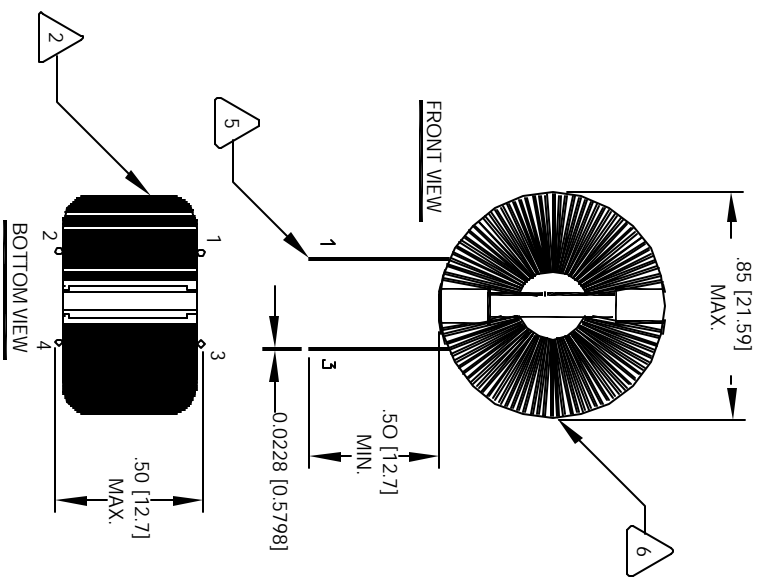

QTY	CODE	MFG. P/N	DESCRIPTION	ITEM NO.
	IDENT			
PARTS LIST				
AUTOCAD SOLIDWORKS SIGN		X		
DRAWN		DATE		
CHKD		DATE		
ENGR		DATE		
APPR		DATE		
SCALE		SIZE		
DO NOT SCALE DRAWING		TOLERANCE METRIC		
		TOLERANCE INCHES		
		TOLERANCE PER NAS 11.5M		
		TOLERANCE PER NAS 11.5M		
		ALL DIMENSIONS ARE IN NOTES		
		AND DIMENSIONS		
		UNLESS OTHERWISE SPECIFIED		