
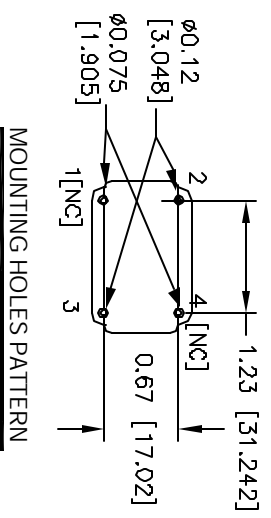
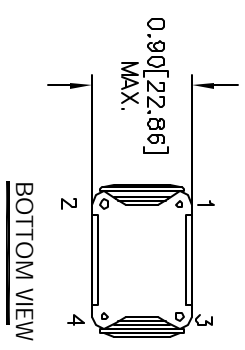
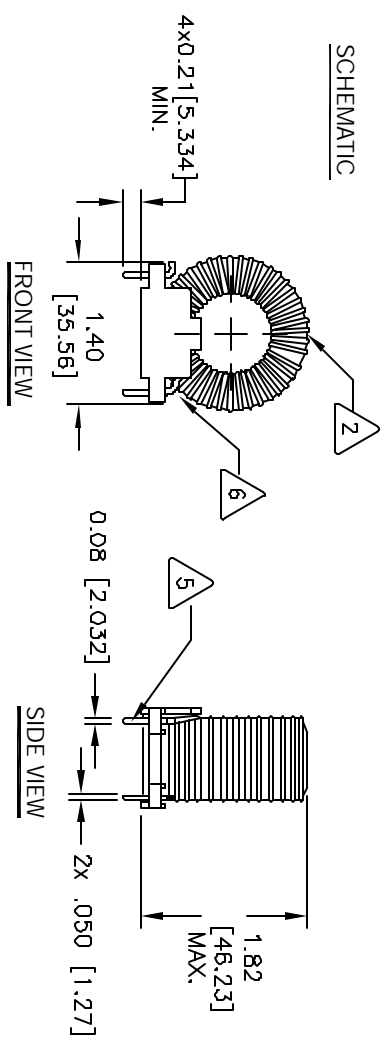


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRODUCTION RELEASE	6/08/03	RRR		



- 6 WHERE SHOWN, USING A PERMANENT MARKING METHOD IF APPLICABLE, MARK PART NUMBER AND REVISION APPROX
- APPLY EPOXY TO SECURE COIL TO BOBBIN

- 5 INSERT THROUGH BOBBIN AS LEADS
- REMOVE INSULATION AND

- 4 WIND COILS EVENLY SPACED
- CONSTRUCTION:

- 3 HI-POT TEST FOR CORE TO WIRE = 500 VDC
- DCR = 7.16 MILLI-OHMS MAX
- L = 29.07 uH ± 10%, 10 KHZ, 0.250 Vrms;
- SPECIFICATIONS:

- 2 WIRE: UL RECOGNIZED 200°C RATED MAGNET WIRE
- CWS BYTEMARK OR OTHER APPROVED PART
- CORE: COATED IRON POWDER TOROID

- 1 RATING CLASS B (130°) REQUIRED
 - MATERIAL: UL RECOGNIZED 94V-0 FLAMMABILITY FOR BOBBIN
- NOTES: UNLESS OTHERWISE SPECIFIED.

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SOLIDWORKS SIGN	X	PARTS LIST	
DATE	6/06/03	CWS Coil Winding Specialist.	
DATE	6/06/03	1510 E. Edinger Ave.	
DATE	6/06/03	Unit B, Santa Ana, CA, 92705	
TITLE: Differential Mode Chokes			
SIZE	DRW. NO.	651-57-2612	REV A
SCALE	1=1	SHEET 1 OF 1	