
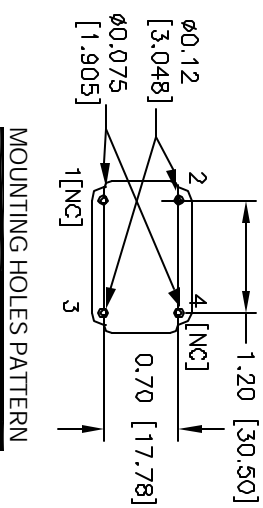

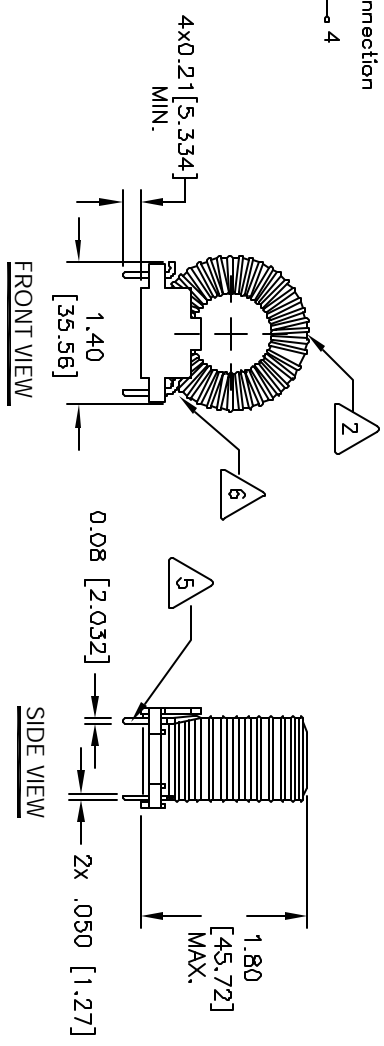


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRODUCTION RELEASE	4/27/05	JLAW		4/27/05

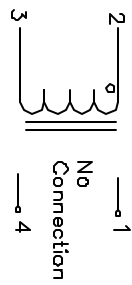

7 BUILT TO ROHS COMPLIANCE AND LEAD FREE.

6 IF APPLICABLE, MARK PART NUMBER AND REVISION
APPLY EPOXY TO SECURE COIL TO BOBBIN.

5 REMOVE WIRE INSULATION AND
INSERT THROUGH BOBBIN AS OUTPUT LEADS

4 WIND COILS EVENLY SPACED
CONSTRUCTION:

3 INDUCTANCE AT RATED CURRENT = 93.0 uH
MAX. TEMP RISE AT RATED CURRENT = 15 °C
RATED CURRENT MAX. = 6.0 AMPS DC
DCR = 28.0 MILL-OHMS MAX
INDUCTANCE @ 0 ADC = 138.0 uH±10%; 15.7KHZ; 0.250 Vrms
SPECIFICATIONS @ 25°C:

2 WIRE: UL RECOGNIZED 155°C OR 200°C RATED MAGNET WIRE
CWSBYTEMARK OR OTHER APPROVED PART
CORE: COATED IRON POWDER TORROID

1. MATERIAL: UL RECOGNIZED 94V-0 FLAMMABILITY FOR BOBBIN
NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SOLIDWORKS SIGN	X	PARTS LIST	
DATE	4/27/05	CWS Coil Winding Specialist. www.cowlws.com	
DATE	4/27/05	1510 E. Edinger Ave. Unit B, Santa Ana, CA, 92705	
DATE	4/27/05	Output Choke	
DATE	4/27/05	6.0 Amps	
DATE	4/27/05	OPC-3-138.6	
DATE	4/27/05	SCALE 1=1	
DATE	4/27/05	SHEET 1 OF 1	