
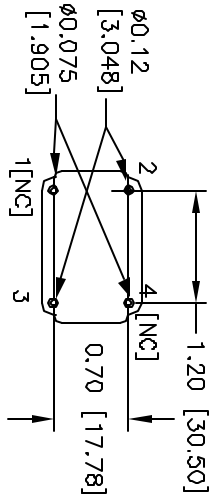

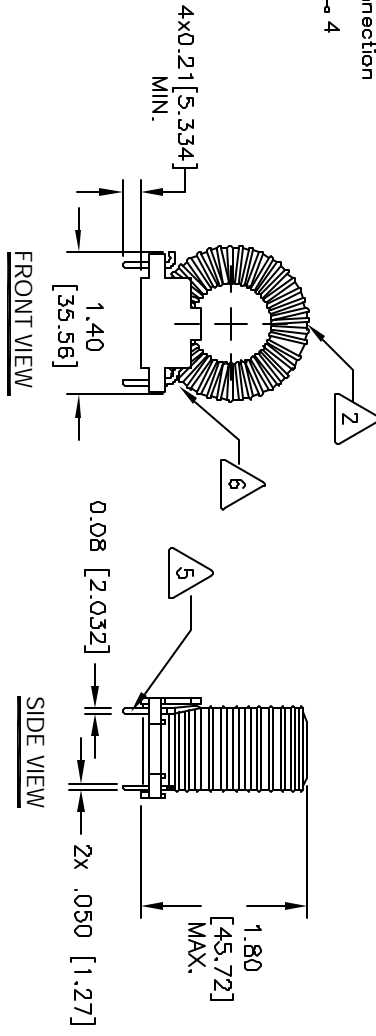


The information contained in this drawing is the sole property of CWI Coil Winding Specialist. Any reproduction in part or whole without written permission of CWI Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	DATE
A		PRODUCTION RELEASE	4/25/05

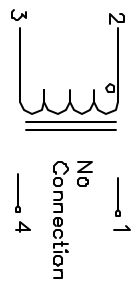

- 7 BUILT TO ROHS COMPLIANCE AND LEAD FREE.
- WHERE SHOWN IF APPLICABLE, MARK PART NUMBER AND REVISION
- APPLY EPOXY TO SECURE COIL TO BOBBIN.
- INSERT THROUGH BOBBIN AS OUTPUT LEADS REMOVE WIRE INSULATION AND
- WIND COILS EVENLY SPACED
- CONSTRUCTION:
- INDUCTANCE AT RATED CURRENT = 89.0 uH
- MAX. TEMP RISE AT RATED CURRENT = 30°C
- RATED CURRENT MAX. = 12.0 AMPS DC
- DCR = 17.0 MILLI-OHMS MAX
- INDUCTANCE @ 0 ADC = 190.0 uH±10%; 15.7KHz; 0.250 Vrms
- SPECIFICATIONS @ 25°C:
- WIRE: UL RECOGNIZED 155°C OR 200°C RATED MAGNET WIRE
- CWSBYTEMARK OR OTHER APPROVED PART
- CORE: COATED HIGH FLUX TOROID
- RATING CLASS B (130°) REQUIRED
- MATERIAL: UL RECOGNIZED 94V-0 FLAMMABILITY FOR BOBBIN

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SOLIDWORKS SIGN	X	PARTS LIST	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER ANSI Y14.5M AND DIMENSIONS ARE IN NOTES	DATE	CWI Coil Winding Specialist. www.cwiws.com	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER ANSI Y14.5M AND DIMENSIONS ARE IN NOTES	DATE	1510 E. Edinger Ave. Unit B, Santa Ana, CA, 92705	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER ANSI Y14.5M AND DIMENSIONS ARE IN NOTES	DATE	Output Choke	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER ANSI Y14.5M AND DIMENSIONS ARE IN NOTES	DATE	12.0 Amps	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER ANSI Y14.5M AND DIMENSIONS ARE IN NOTES	DATE	OPC-3-190-12H	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER ANSI Y14.5M AND DIMENSIONS ARE IN NOTES	DATE		