
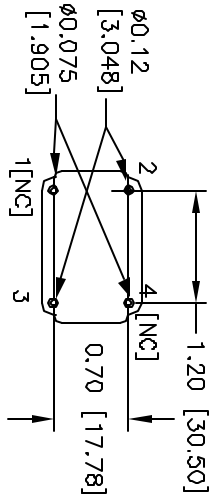

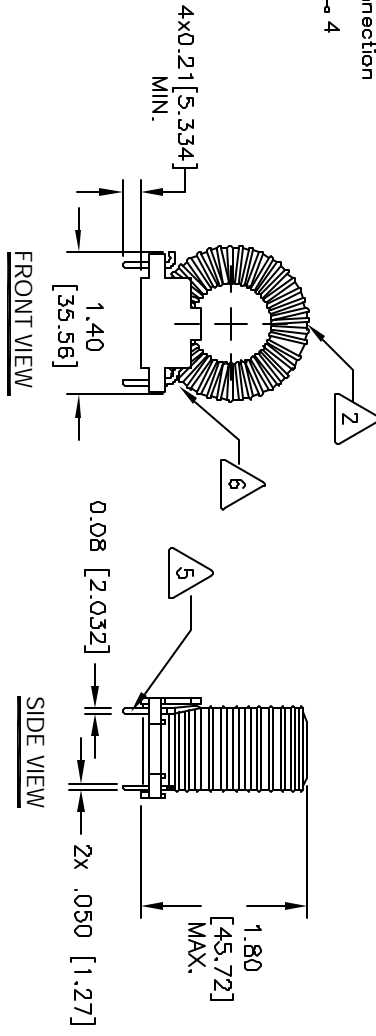


The information contained in this drawing is the sole property of CWI's Coil Winding Specialist. Any reproduction in part or whole without written permission of CWI's Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	DATE
A		PRODUCTION RELEASE	4/25/05

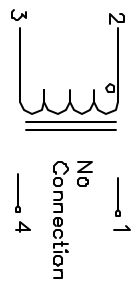

- 7 BUILT TO ROHS COMPLIANCE AND LEAD FREE.
- WHERE SHOWN IF APPLICABLE, MARK PART NUMBER AND REVISION
- 6 APPLY EPOXY TO SECURE COIL TO BOBBIN.

- 5 INSERT THROUGH BOBBIN AS OUTPUT LEADS REMOVE WIRE INSULATION AND
- 4 WIND COILS EVENLY SPACED

- 3 INDUCTANCE AT RATED CURRENT = 181.0 uH  
MAX. TEMP RISE AT RATED CURRENT = 30°C  
RATED CURRENT MAX. = 8.0 AMPS DC  
DCR = 37.0 MILLI-OHMS MAX  
INDUCTANCE @ 0 ADC = 370.0 uH±10%; 15.7KHz; 0.250 Vrms  
SPECIFICATIONS @ 25°C:

- 2 WIRE: UL RECOGNIZED 155°C OR 200°C RATED MAGNET WIRE  
CWSB/TYEMARK OR OTHER APPROVED PART  
CORE: COATED HIGH FLUX TOROID

- 1 RATING CLASS B (130°) REQUIRED  
MATERIAL: UL RECOGNIZED 94V-0 FLAMMABILITY FOR BOBBIN
- NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SOLIDWORKS SIGN	X	<b>PARTS LIST</b>	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER FIG 11.5M ALL DIMENSIONS ARE IN NOTES AND DIMENSIONS		<b>CWI'S COIL WINDING SPECIALIST</b>	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER FIG 11.5M ALL DIMENSIONS ARE IN NOTES AND DIMENSIONS		1510 E. Edinger Ave Unit B, Santa Ana, CA 92705	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER FIG 11.5M ALL DIMENSIONS ARE IN NOTES AND DIMENSIONS		<b>Output Choke</b>	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER FIG 11.5M ALL DIMENSIONS ARE IN NOTES AND DIMENSIONS		8.0 Amps	
UNLESS OTHERWISE SPECIFIED TOLERANCE PER FIG 11.5M ALL DIMENSIONS ARE IN NOTES AND DIMENSIONS		OPC-3-370-8H	REV A
UNLESS OTHERWISE SPECIFIED TOLERANCE PER FIG 11.5M ALL DIMENSIONS ARE IN NOTES AND DIMENSIONS		SCALE 1=1	SHEET 1 OF 1