
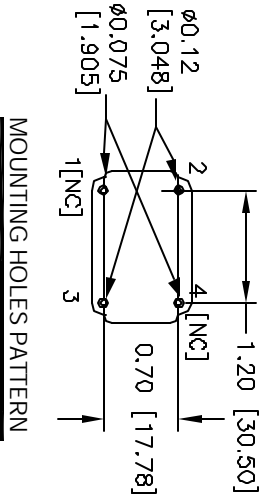

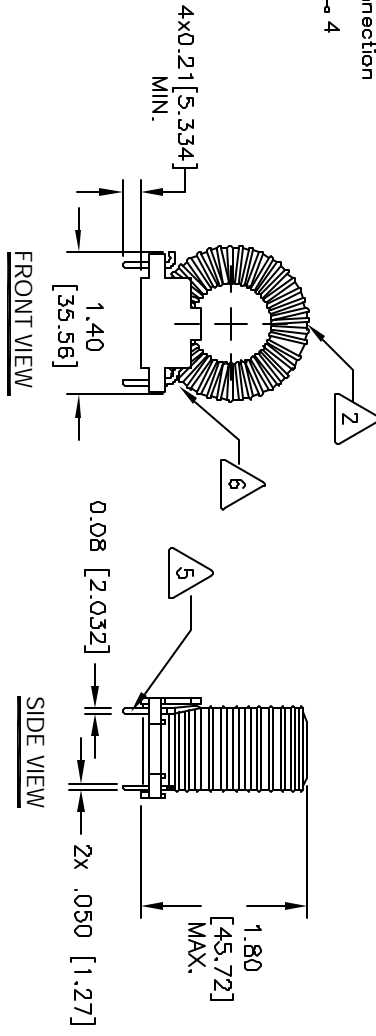


The information contained in this drawing is the sole property of CWI's Coil Winding Specialist. Any reproduction in part or whole without written permission of CWI's Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	DATE
A		PRODUCTION RELEASE	4/27/05

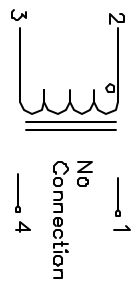

- 7 BUILT TO ROHS COMPLIANCE AND LEAD FREE.
- WHERE SHOWN IF APPLICABLE, MARK PART NUMBER AND REVISION
- APPLY EPOXY TO SECURE COIL TO BOBBIN.
- 5 INSERT THROUGH BOBBIN AS OUTPUT LEADS REMOVE WIRE INSULATION AND
- WIND COILS EVENLY SPACED
- CONSTRUCTION:
- INDUCTANCE AT RATED CURRENT = 311.0 uH
- MAX. TEMP RISE AT RATED CURRENT = 27C
- RATED CURRENT MAX. = 6.0 AMPS DC
- DCR = 59.0 MILLI-OHMS MAX
- INDUCTANCE @ 0 ADC = 600.0 uH±10%; 15.7KHz; 0.250 Vrms
- SPECIFICATIONS @ 25°C:
- WIRE: UL RECOGNIZED 155°C OR 200°C RATED MAGNET WIRE
- CWSBYTEMARK OR OTHER APPROVED PART
- CORE: COATED HIGH FLUX TOROID
- 2
- 1 MATERIAL: UL RECOGNIZED 94V-0 FLAMMABILITY FOR BOBBIN

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SOLIDWORKS SIGN	X	PARTS LIST	
DATE	DATE	CWI'S COIL WINDING SPECIALIST	
4/27/05	4/27/05	1510 E. Edinger Ave	
		Unit B, Santa Ana, CA, 92705	
DRAWN RLU	4/27/05	TITLE	
DRG'D JLAU	4/27/05	Output Choke	
ENGR JLAU	4/27/05	6.0 Amps	
APPR. KKSJM	4/27/05	SIZE DIM. IN.	
		B	
		OPC-3-600-6H	REV A
		SCALE	
		1=1	SHEET 1 OF 1