

The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

| REVISION HISTORY | | | |
|------------------|-----|--------------------|---------|
| REV | ECN | DESCRIPTION | DATE |
| C | | PRODUCTION RELEASE | 1/05/05 |

6 WHERE SHOWN, USING A PERMANENT MARKING METHOD IF APPLICABLE, MARK PART NUMBER AND REVISION IN APPROX

5 REMOVE INSULATION AND TIN LEADS APPROX. 0.25 INCH


4 WIND 20 TURNS, # 15 AWG, SINGLE LAYER ON CONSTRUCTION:

3 HI-POT TEST FOR CORE TO WINDING ISOLATION, 250VDC RATED CURRENT = 12 AMPS DCR = 6.6 MOHMS MAX./COIL. L = 22uH MIN, 1KHZ, 1Vrms. SPECIFICATIONS @ 25 °C:

2 CORE: COATED POWDER CORE

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

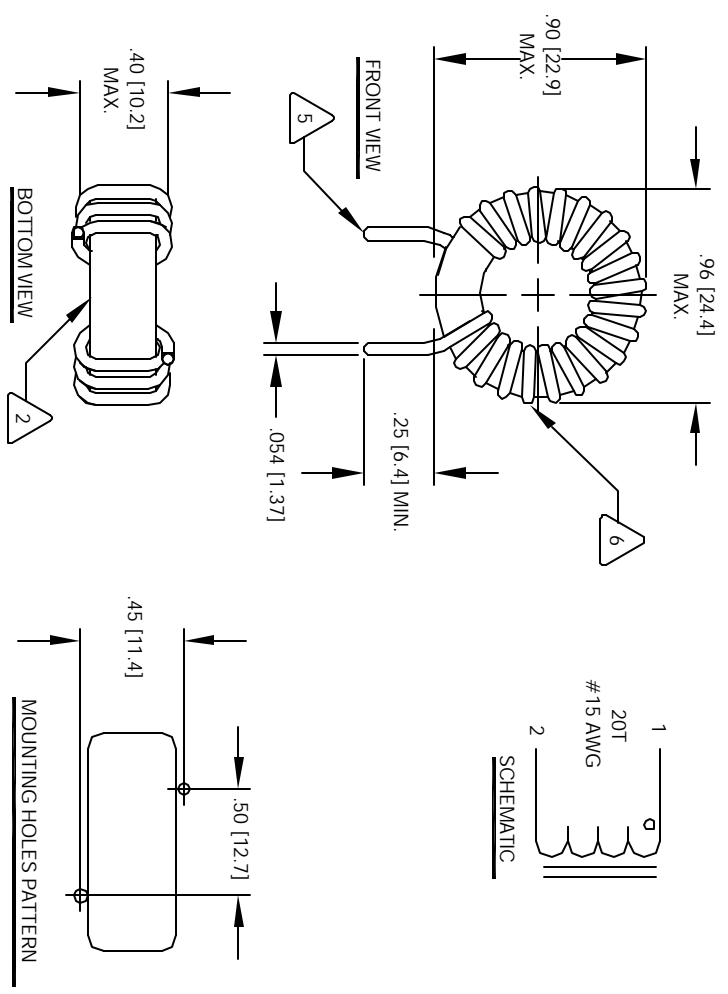

| QTY | CODE IDENT | MFG. P/N | DESCRIPTION | ITEM NO. |
|-----|------------|----------|------------------------------|----------|
| | | | PARTS LIST | |
| | | | COILS COM, INC | |
| | | | CWS Coil Winding Specialist | |
| | | | 1510 E. Edinger Ave | |
| | | | Unit B, Santa Ana, CA, 92705 | |
| | | | TITLE: | |
| | | | Differential Mode Choke | |
| | | | (12 AMPS) | |
| | | | SIZE: | |
| | | | B | |
| | | | SCALE: | |
| | | | 1=2 | |
| | | | DATE: | |
| | | | 1/05/05 | |
| | | | CHK: | |
| | | | JLU | |
| | | | DATE: | |
| | | | 1/05/05 | |
| | | | REV: | |
| | | | C | |
| | | | SHEET: | |
| | | | 1 OF 1 | |