


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY					
REV	ECN	DESCRIPTION	SIGN & DATE		
A		PRE-PRODUCTION RELEASE	DR	DATE	DATE
			RRR	7/13/04	7/14/04



USING A PERMANENT MARKING METHOD
MARK PART NUMBER AND REVISION, IF APPLICABLE
IF NEEDED, WRAP INDUCTOR WITH GLASS TAPE

TO THE CORE
MUST REST FLAT ON PCB. LEADS MUST BE TANGENT
FLUSH WITH THE COIL EDGE, AS SHOWN (I.E. COIL
REMOVE INSULATION AND TIN LEADS 0.50 INCH


WIND COILS EVENLY SPACED AROUND THE CORE
CONSTRUCTION:

H-POT TEST FOR WINDING TO CORE ISOLATION = 500VDC MIN
CURRENT RATING : 1.9 AMPS, 40 °C TEMP. RISE, NO AIR FLOW
DCR = 160.0 MILLI-OHMS MAX.
DC BIASED = 1.9 AMPS, INDUCTANCE = 158 UH
DC BIASED = 1.4 AMPS, INDUCTANCE = 200 UH
INDUCTANCE = 250 UH +-10% @ LOW DC BIAS, 1 KHz, 250mv
SPECIFICATIONS:


WIRE: UL RECOGNIZED 200 °C RATED MAGNET WIRE
CWS BYTE MARK OR OTHER APPROVED PART
CORE: COATED HIGH FLUX TOROIDAL CORE

RATING CLASS B (130°C MIN.) REQUIRED
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY


NOTES: TOROIDAL POWER CHOKE. ALL DIMENSIONS IN INCHES

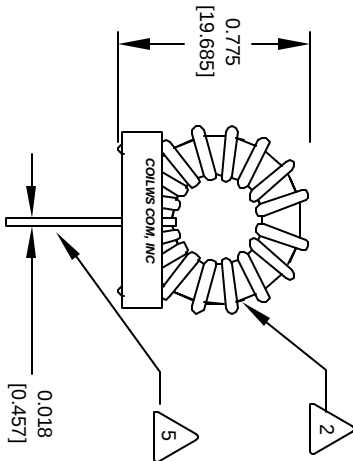


FRONT VIEW



SIDE VIEW



FRONT VIEW



MOUNTING HOLES PATTERN

CODE	IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
PARTS LIST				
AUTOCAD	X			
SOLIDWORKS				
SIGN	DATE			
DRWN	7/13/04			
CHKD	7/13/04			
ENGR	7/13/04			
APPR.	7/13/04			
UJAU	7/13/04			
TITLE: Toroidal Power Chokes				
Toroid Inductor				
CWS Coil Winding Specialist.				
1510 E. Edinger Ave.				
Unit B, Santa Ana, CA 92705				
SIZE: 1.7A				
MHF127-331M-1.7A				
SCALE: 2=1				
SHEET 1 OF 1				