


**PROPOSED PAD ARRANGEMENT**

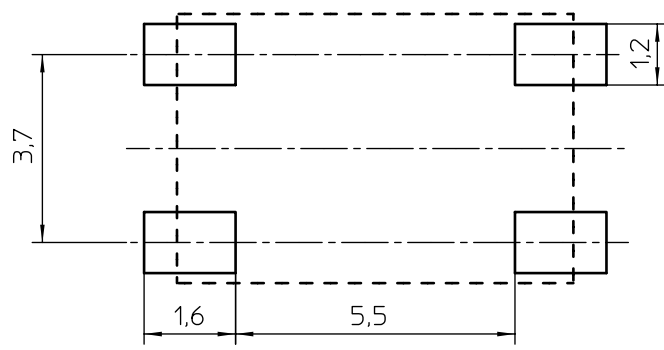

- Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
- UL file number: E54705(M) - UL94V-0
- Pin material: CuSn - Ni flash, SnPb plated.
- Max. operating temp.: acc. to IEC 85 class F, 155°C.
- Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
- Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
- Min. winding area: 1,5 mm<sup>2</sup>.
- Mean length of turn: 12,6 mm.

|              |                 |                   |          |                             |                   |          |          |          |
|--------------|-----------------|-------------------|----------|-----------------------------|-------------------|----------|----------|----------|
| CLASSNO.     |                 | CPHS-E5,3/2-1S-4P |          | 4322 021 01741              |                   | 96-07-25 | 96-08-29 | 97-01-07 |
| NAME<br>NAAM | J. Jon          | SUPERS.<br>VERV.  |          | 1                           | 112 - 001         | 069      | A3       |          |
| MPA          | CHECK<br>CONTR. | DAT.              | 96-07-25 | Property of<br>Eigendom van | © FERROXCUBE 2000 |          |          |          |