
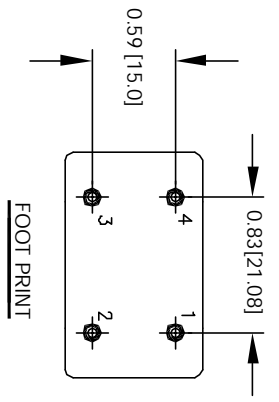
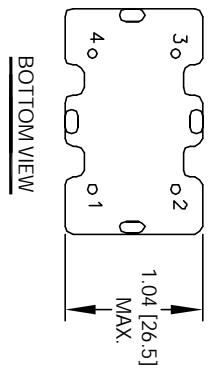
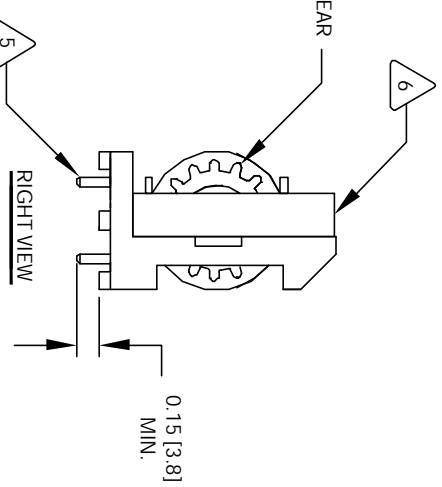
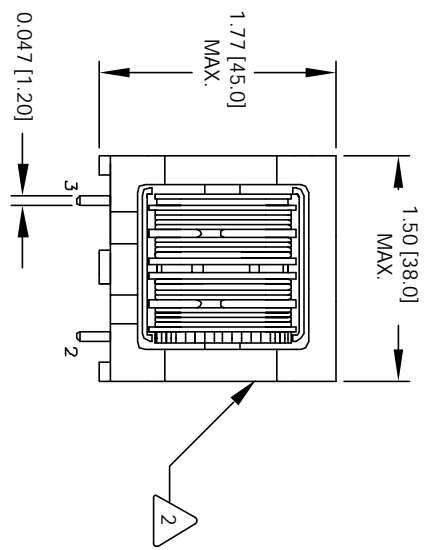


The information contained in this drawing is the sole property of CWS Coil Winding Specialists. Any reproduction in part or whole without written permission of CWS Coil Winding Specialists is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	SIGN & DATE			
			BY	DATE	CHK	DATE
B		PRODUCTION RELEASE	BLN	1/10/07	JLJU	1/10/07



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION APPROX

5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY SPACED ON BOBBIN CONSTRUCTION:

INSURE INTEGRITY OF WINDING SEPARATION HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO WIRE SIZE DIAMETER = 0.85 MILLIMETER NUMBER OF TURNS = 36 DCR = 0.085 OHMS MAX CURRENT RATING = 4.5A AC L = 6.0 MH MIN @ 10 KHZ, 0.250 Vrms; SPECIFICATIONS @ 25 °C

3 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE CWS BYTEMARK OR OTHER APPROVED PART CORE: SINGLE PIECE FERRITE H CORE

2 BOBBIN RATING CLASS B (130°) REQUIRED MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY NOTES: UNLESS OTHERWISE SPECIFIED.

QTY	UM	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
		X		<b>PARTS LIST</b>	

UNLESS OTHERWISE SPECIFIED	
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M	
ALL DIMENSIONS ARE IN INCHES AND DIMENSIONS ARE IN MILLIMETERS	
TOLERANCE INCHES: .XX ±.010 .XY ±.015 .X ±.030	
TOLERANCE METRCS: .XX ±.254 .XY ±.38 .X ±.762	
ANGLE PROJECTION	DO NOT SCALE DRAWINGS

AUTOCAD SOLIDWORKS	DATE	TITLE	SIZE	DWG. NO.	REV
BLN	1/10/07	<b>Common Mode Line Filter Vertical Mount</b>	B	35V-6K0	B
ENGR. KSLUM	1/10/07				
APPR. JLJU	1/10/07				

**COIL WS COM, INC**  
353 W. GROVE AVE.  
ORANGE, CA. 92665