




The information contained in this drawing is the sole property of Coil Winding Specialist, Inc. Any reproduction in part or whole without written permission of Coil Winding Specialist is prohibited.



- 7 CORE AND BOBBIN.
EPOXY APPLIED ON BOTH SIDES AS NEEDED TO SUPPORT WHERE SHOWN, USING A PERMANENT MARKING METHOD
- 6 MARK PART NUMBER AND REVISION APPROX
- 5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS
- 4 WIND BOTH COILS EVENLY SPACED ON BOBBIN CONSTRUCTION:
INSURE INTEGRITY OF WINDING SEPARATION
HP-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO SRF = 355 KHZ
IMPEDANCE = 48.8 KILO OHMS TYP. @ 355 KHZ
INTERWINDING CAPACITANCE = 20 pF @ 10KHZ
DCR = 0.11 OHMS MAX
CURRENT RATING = 4.0A AC
L = 8.10mH MIN @ 10 KHZ, 0.250 Vrms;
SPECIFICATIONS @ 25 °C
- 3 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE
CWS BYTE-MARK OR OTHER APPROVED PART
CORE: SINGLE PIECE FERRITE H CORE
- 2 BOBBIN RATING CLASS B (130°) REQUIRED
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

REVISION HISTORY		SIGN & DATE	
REV	ECN	DESCRIPTION	DATE
B		PRODUCTION RELEASE	1/10/07
C		ELECT. SPEC. CHANGE. NOTE ADDED	3/25/13

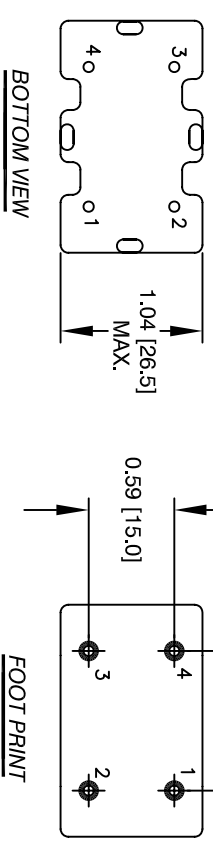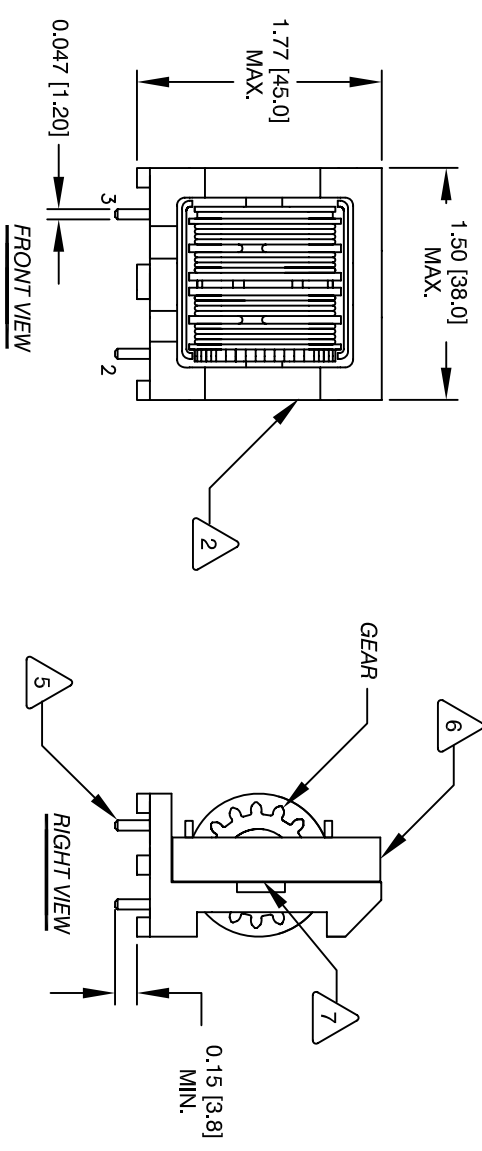

QTY	UM	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
				PARTS LIST	
AUTOCAD SOLIDWORKS X					
DRAWN	BUN	DATE	sales@coilws.com www.coilws.com		
ENGR.	JLJU	1/10/07	Coil Winding Specialist, Inc. 353 W. GROVE AVE. ORANGE, CA. 92865		
APPR.	JLJU	1/10/07	TITLE: Common Mode Line Filter Vertical Mount		
SIZE		DWG. NO.		REV	
SCALE		1 = 1		C	

DO NOT SCALE DRAWING