


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY


REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
K	140714	ADD VARNISH, ALSO CHANGE TOOLING OF THE CORE	AK	7/14/14	BO	7/14/14



- 7 BUILT TO ROHS COMPLIANCE WHERE SHOWN.
- 6 MARK PART NUMBER AND REVISION
- 5 CO-PLANARITY: CORE SURFACE TO LEADS WITHIN .005 INCH
- 4 HELIX WINDING INSULATION:

- 3 SPECIFICATIONS @ 25°C
- THIS PART IS AIR DRY VARNISHED WIRE: 200°C MIN. RATING HELICAL WOUND MAGNET WIRE CWS BYTEMARK OR OTHER APPROVED PART
- 2 CORE: GAPPED RM10 FERRITE
- 1 RATING OF 200°C REQUIRED

NOTES: UNLESS OTHERWISE SPECIFIED, PLANAR INDUCTOR.  
READ NOTES FROM BOTTOM TO TOP.

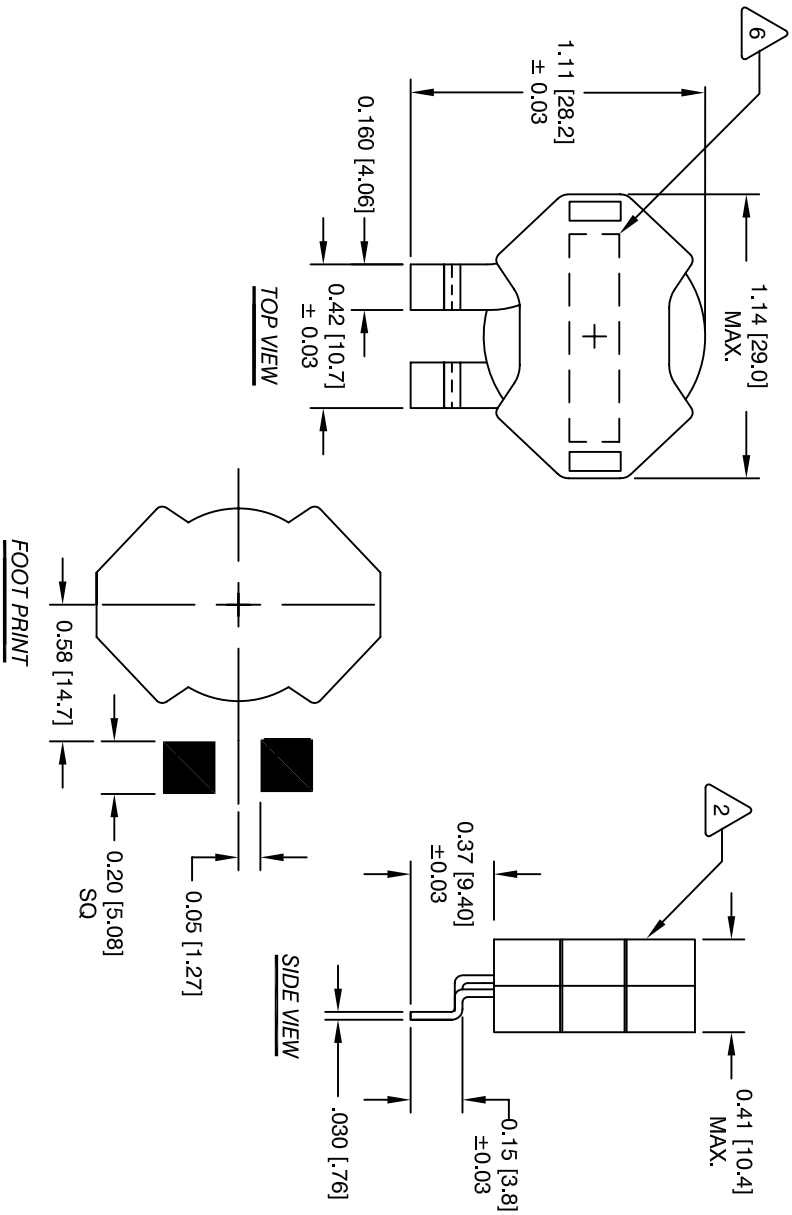

UNLESS OTHERWISE SPECIFIED		DIMENSIONING AND TOLERANCE PER ANSI Y14.5M AND [MILLIMETERS]		TOLERANCE INCHES:		TOLERANCE METRICS:		ANGLE PROJECTION	
XXX±.005	XX±.015	∅	±.030	∅	±.030	XX±.127	XX±.38	∅	DO NOT SCALE DRAWING

AUTOCAD SOLIDWORKS	X	DATE	DATE	DATE	DATE
DRWN: TOK	6/25/05	CHKD: JLAU	6/25/05	ENGR: KSUM	6/25/05
APPR: JLAU	6/25/05	TITLE: High Current Output Choke 50 Amps Max			
SIZE: B	DWG. NO: CWS-38365	SCALE:	REV: K		

PARTS LIST

sales@coilws.com	CWS Coil Winding Specialist.
www.coilws.com	353 W. GROVE AVE
	ORANGE, CA 92865