

WIND ON TO CORE AND EVENLY SPACED

4 CONSTRUCTION:

TO INSURE INTERGRITY OF WINDING SEPARATION
HI—POT TEST FOR WINDING TO WINDING = 300 VDC MIN.
SERIES DCR= 0.019 OHMS MAX.
SERIES FULL LOAD CURRENT = 3.25 AMPS. DC.
SERIES FULL LOAD INDUCTANCE = 1.17 uH MIN.
SERIES OPEN CIRCUIT INDUCTANCE = 1.69 uH @ ± 20 %
PARALLEL DCR= 0.005 OHMS MAX.
PARALLEL FULL LOAD CURRENT = 6.50 AMPS. DC.
PARALLEL FULL LOAD INDUCTANCE = 0.29 uH MIN.
PARALLEL OPEN CIRCUIT INDUCTANCE = 0.42 uH @ ± 20 %


3 SPECIFICATIONS:

WIRE: UL RECOGNIZED 130°C RATING MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
CORE: TOROID

BOBBIN RATING CLASS B (130°C) REQUIRED

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED. READ FROM BOTTOM UP.

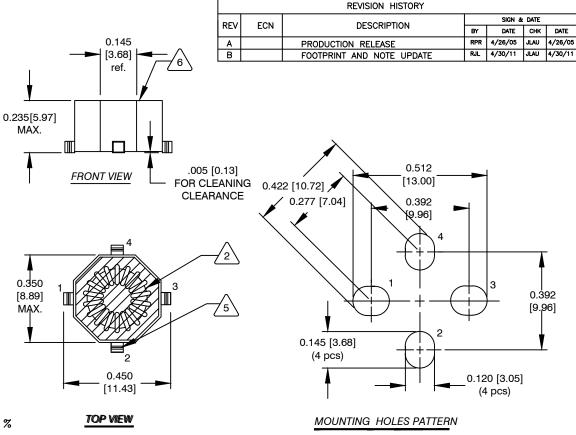

	QTY COD			MFG. P/N		DESCRIPTION		ITEM NO.
	PARTS LIST							
	AUTOCAD SOLIDWORKS		Х	sales@coilws.com www.coilws.com		Coil Winding Specialist, Inc.		
UNLESS OTHERWISE SPECIFIED	SIGN		DATE			J JJJ W. Grove	353 W. Grove Avenue Orange, CA 92865	
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M	DRAWN	RPR	4/26/05	TITLE:				
ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS].	CHECKED	JLAU	4/26/05	Parallel Series Inductor				
TOLERANCE INCHES: .XXX=±.010 .XX=±.015 ≪=±0'30' TOLERANCE METRICS:	ENGR.	KSUM	4/26/05	6175	SIZE ÍDWG, NO.			REV
.XXX=±.254 .XX=±.38 < ✓=±0'30' ANGLE PROJECTION	APPR.	JLAU	04/28/11			X0.47-2-	0.47-2-SD E	
DO NOT SCALE DRAWING				SCALE	NOT_TO_S	CALE	SHEET 1 OF	1

EP FORM0005 REV 3 10/01

CAD-FILE: