

6

AND REVISION WHERE SHOWN
IF APPLICABLE MARK PART NUMBER

5

REMOVE INSULATION AND TIN LEADS
WIND ON TO CORE AND EVENLY SPACED

4 CONSTRUCTION:

TO INSURE INTERGRITY OF WINDING SEPARATION
HI-POT TEST FOR WINDING TO WINDING = 300 VDC MIN.
SERIES DCR= 0.028 OHMS MAX.

SERIES FULL LOAD CURRENT = 2.45 AMPS. DC.

SERIES FULL LOAD INDUCTANCE = 4.24 uH MIN.

SERIES OPEN CIRCUIT INDUCTANCE = 7.06 uH @ ± 20 %

PARALLEL DCR= 0.007 OHMS MAX.

PARALLEL FULL LOAD CURRENT = 4.90 AMPS. DC.

PARALLEL FULL LOAD INDUCTANCE = 1.06 uH MIN.

PARALLEL OPEN CIRCUIT INDUCTANCE = 1.76 uH @ ± 20 %

3 SPECIFICATIONS:

WIRE: UL RECOGNIZED 130°C RATING MAGNET WIRE

CWS BYTE MARK OR OTHER APPROVED PART



CORE: TOROID

2

BOBBIN RATING CLASS B (130°C) REQUIRED

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

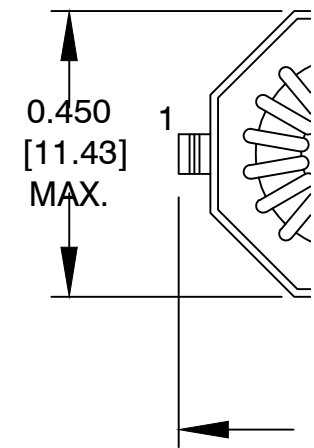

BO1

U
D
Ti
A
Al
Ti
.XXX
Ti
.XXX
A