




The information contained in this drawing is the sole property of CWS Coil Winding Specialist.
 Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

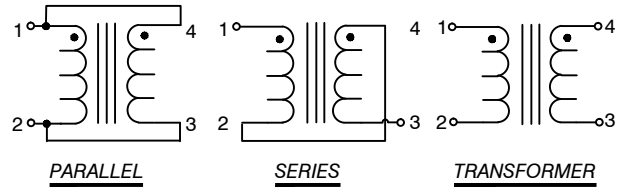

6 AND REVISION WHERE SHOWN
 IF APPLICABLE MARK PART NUMBER

5 REMOVE INSULATION AND TIN LEADS
 WIND ON TO CORE AND EVENLY SPACED

4 CONSTRUCTION:
 TO INSURE INTERGRITY OF WINDING SEPARATION
 HI-POT TEST FOR WINDING TO WINDING = 300 VDC MIN.
 SERIES DCR= 0.220 OHMS MAX.
 SERIES FULL LOAD CURRENT = 1.05 AMPS. DC.
 SERIES FULL LOAD INDUCTANCE = 42.73 uH MIN.
 SERIES OPEN CIRCUIT INDUCTANCE = 78.40 uH @ ± 20 %
 PARALLEL DCR= 0.055 OHMS MAX.
 PARALLEL FULL LOAD CURRENT = 2.10 AMPS. DC.
 PARALLEL FULL LOAD INDUCTANCE = 10.68 uH MIN.
 PARALLEL OPEN CIRCUIT INDUCTANCE = 19.60 uH @ ± 20 %



3 SPECIFICATIONS:

2 WIRE: UL RECOGNIZED 130°C RATING MAGNET WIRE
 CWS BYTE MARK OR OTHER APPROVED PART
 CORE: TOROID

1 BOBBIN RATING CLASS B (130°C) REQUIRED
 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS
DIMENSI
TOLERAN
ALL DIM
AND [M
TOLERAN
.XXX=±.01
TOLERAN
.XXX=±.25
ANGLE
DO 1