


The information contained in this drawing is the sole property of CWS Coil Winding Specialist.
Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

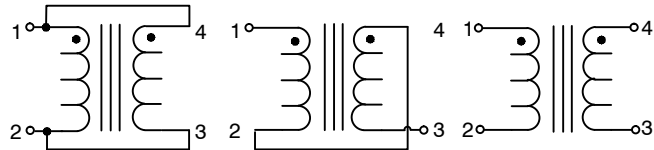

PARALLEL SERIES TRANSFORMER

7 BUILD TO RoHS COMPLIANCE AND PB FREE

△ 6 AND REVISION WHERE SHOWN
IF APPLICABLE MARK PART NUMBER

△ 5 REMOVE INSULATION AND TIN LEADS

WIND ON TO CORE AND EVENLY SPACED
4 CONSTRUCTION:

TO INSURE INTEGRITY OF WINDING SEPARATION
HI-POT TEST FOR WINDING TO WINDING = 300 VDC MIN.
MAX DCR IS ± 15% OF TYPICAL VALUE.
SERIES DCR= 1.367 OHMS TYP @ 20 °C
SERIES RMS CURRENT = 0.54 AMPS.
PARALLEL: (1,4 - 3,2), SERIES: (1 - 3) TIE (2 - 4).
@ 100 KHZ, 0.250 VRMS, 0.0 ADC,
SERIES OPEN CIRCUIT INDUCTANCE = 265.80 uH ± 25 %,

MAX DCR IS ± 15% OF TYPICAL VALUE
PARALLEL DCR= 0.342 OHMS TYP @ 20 °C,
DELTA TEMP 40 °C, AMBIENT TEMP 85 °C.
PARALLEL RMS CURRENT = 1.07 AMPS @
PARALLEL (1,4 - 3,2), SERIES (1 - 3) TIE (2 - 4).
@ 100 KHZ, 0.250 VRMS, 0.0 ADC,
PARALLEL OPEN CIRCUIT INDUCTANCE = 66.44 uH ± 25 %,




3 SPECIFICATIONS:

WIRE: UL RECOGNIZED 130°C RATING MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
△ 2 CORE: TOROID

BOBBIN RATING CLASS B (130°C) REQUIRED

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED. READ FROM BOTTOM UP.

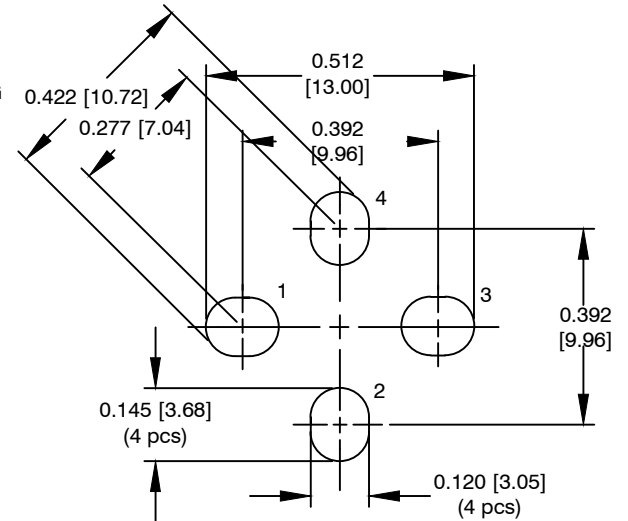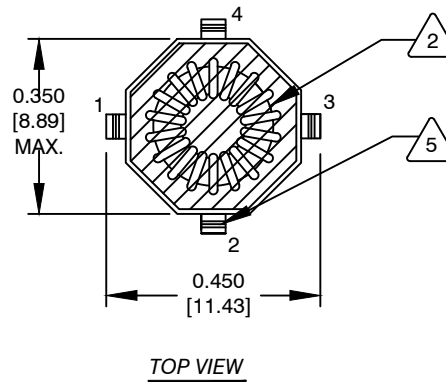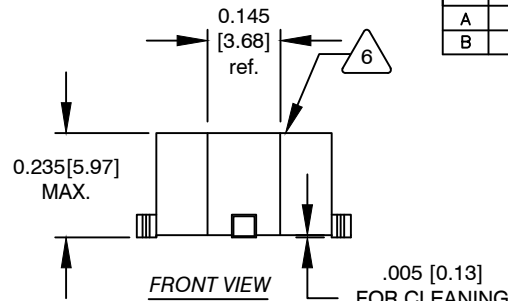

MOUNTING HOLES PATTERN

| REVISION HISTORY | | | | | | |
|------------------|-----|---------------------------|-------------|---------|------|---------|
| REV | ECN | DESCRIPTION | SIGN & DATE | | | |
| | | | BY | DATE | CHK | DATE |
| A | | PRODUCTION RELEASE | RPR | 4/26/05 | JLAU | 4/26/05 |
| B | | FOOTPRINT AND NOTE UPDATE | RJL | 4/30/11 | JLAU | 4/30/11 |

| QTY | CODE IDENT | MFG. P/N | DESCRIPTION | ITEM NO. |
|-------------------|------------|----------|--------------------------|--|
| PARTS LIST | | | | |
| AUTOCAD | | X | | |
| SOLIDWORKS | | | | |
| SIGN | | DATE | sales@coilws.com | Coil Winding Specialist, Inc. 353 W. Grove Avenue Orange, CA 92865 |
| DRAWN | RPR | 4/26/05 | www.coilws.com | |
| CHECKED | JLAU | 4/26/05 | Parallel Series Inductor | |
| ENGR. | KSUM | 4/26/05 | | |
| APPR. | JLAU | 04/28/11 | | |
| TITLE: | | | SIZE DWG. NO. | REV |
| | | | B CX68-2-HF | B |
| SCALE | | | NOT_TO_SCALE | SHEET 1 OF 1 |

| | |
|--|--|
| UNLESS OTHERWISE SPECIFIED | |
| DIMENSIONING AND TOLERANCE PER ANSI Y14.5M | |
| ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]. | |
| TOLERANCE INCHES: .XXX=±.010 .XX=±.015 $\angle=±0°30'$ | |
| TOLERANCE METRICS: .XXX=±.254 .XX=±.38 $\angle=±0°30'$ | |
| ANGLE PROJECTION | |
| DO NOT SCALE DRAWING | |