



The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.




SCHEMATIC

DIMENSIONAL TOLERANCES INCHES [MM]				
A MAX	B MAX	C TYP	D REF	X REF
1.10 [27.94]	0.48 [12.19]	0.50 [12.0]	0.036 [0.91]	0.37 [9.40]

REVISION HISTORY					
REV	ECN	DESCRIPTION	SIGN & DATE		
			BY	DATE	CHK DATE
B	—	UPDATED SPEC.	TDK	5/09/04	JLAU 5/09/04
C	—	UPDATED SPEC.	TN	07/11/2020	JL 07/11/2020

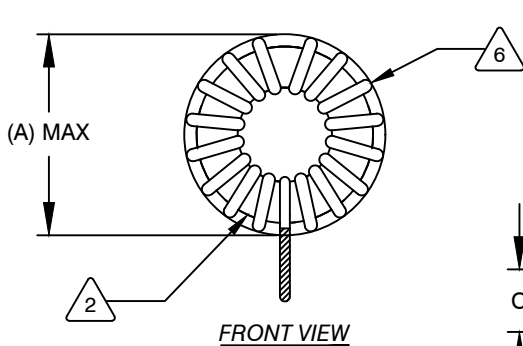


FRONT VIEW

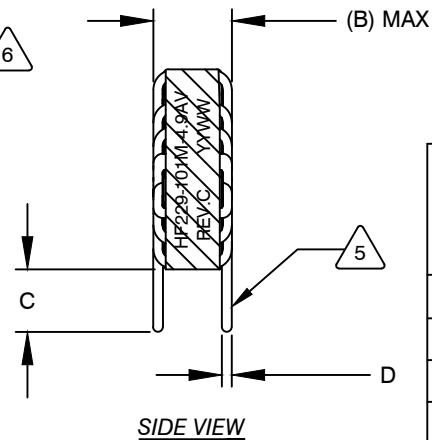

SIDE VIEW

DC BIAS TABLE

DC BIAS (AMP)	L@ 1KHz (REF)
0	99uH
1	98uH
2	96uH
3	95uH
4	94uH
4.9	92uH



MOUNTING HOLES PATTERN

7 BUILD TO RoHS COMPLIANCE AND LEAD FREE.

USING A PERMANENT MARKING METHOD
MARK PART NUMBER, REVISION AND DATE CODE
WRAP INDUCTOR WITH 3M # 79 OR EQUAL

(I.E. COIL MUST REST FLAT ON PCB). LEADS MUST BE TANGENT TO THE CORE
REMOVE INSULATION AND TIN LEADS 0.5 INCH, FLUSH WITH THE COIL EDGE

WIND COILS EVENLY SPACED AROUND THE CORE
CONSTRUCTION:

THESE SPECIFICATIONS ARE BASED ON LOW RIPPLE CURRENT
WEIGHT: 50 GRAMS TYPICAL
INTERWINDING CAPACITANCE = 18.75pF TYP @ SRF
SRF = 3.8 MHz TYP
|Z| = 11.2 KILO-OHMS TYP @ SRF
RECOMMENDED AMBIENT OPERATING TEMP: -40°C TO 155°C
HI-POT TEST FOR WINDING TO CORE ISOLATION = 500VDC MIN.
CURRENT RATING : 4.9 AMPS, 40°C TEMP. RISE WITH SOME AIR FLOW
DCR = 44 MILLI-OHMS MAX.
INDUCTOR DC BIAS: SEE TABLE ON THE RIGHT
INDUCTANCE = 100uH±10% @ 0 AMP DC BIAS, 1.0 KHz, 250mV

3 SPECIFICATIONS: @ 25°C:

WIRE: UL RECOGNIZED 200°C RATED MAGNET WIRE
CORE: POWDERED TOROIDAL CORE, CWS BYTE MARK OR OTHER APPROVED PART

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY, RATING CLASS B (130°C MIN.) REQUIRED
ANY TOLERANCE. THIS DIM. CAN VARY A LITTLE FROM PART TO PART.
"TYP" IN DIM. TOL. TABLE REFERS TO A NON-CRITICAL TYPICAL (AVERAGE) DIM. WITHOUT
NOTES: UNLESS OTHERWISE STATED, READ NOTES FROM BOTTOM UP.
CAGE CODE: 5DME2

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
PARTS LIST			
AUTOCAD	X	COILWS COM, INC www.coilws.com CWS Coil Winding Specialist. 1510 E. Edinger Ave. Unit B. Santa Ana, CA. 92705	TITLE: TOROIDAL POWER INDUCTOR 100uH, 4.9 Amps, Vertical
SOLIDWORKS	DATE		
DRAWN	TDK 2/8/04		
CHECKED	JLAU 2/9/04		
ENGR.	KSUM 3/5/04	SIZE B	DWG. NO. HF229-101M-4.9AV
APPR.	JLAU 3/6/04		
DO NOT SCALE DRAWING		SCALE 2=1	REV C
SHEET 1 OF 1			

UNLESS OTHERWISE SPECIFIED			
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M			
ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].			
TOLERANCE INCHES: .XXX=±.005 .XX=±.015 <I=±0°30'			
TOLERANCE METRICS: .XXX=±.127 .XX=±.38 <I=±0°30'			
ANGLE PROJECTION			
DO NOT SCALE DRAWING			