
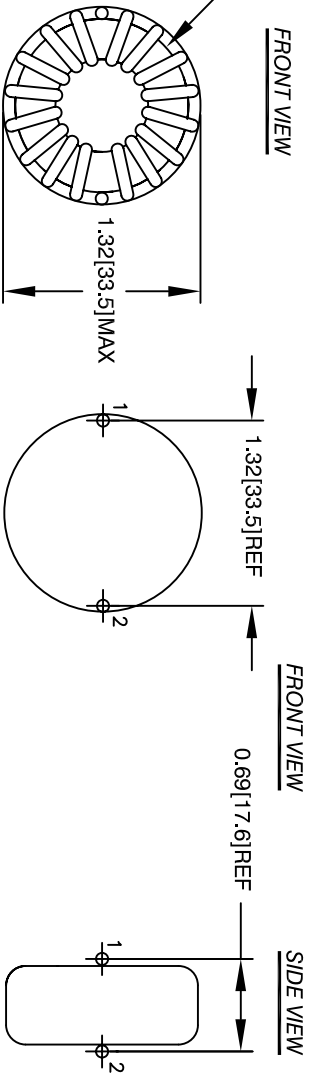
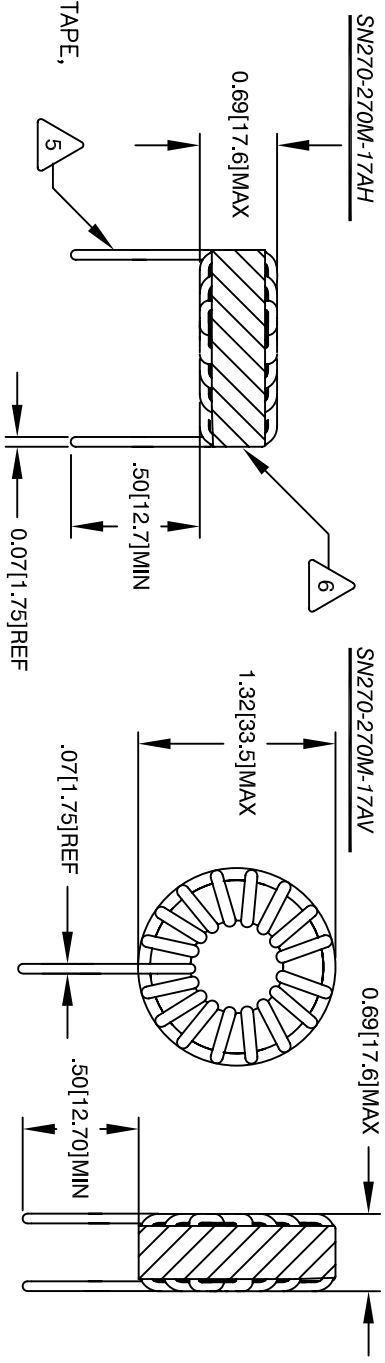


The information contained in this drawing is the sole property of CMS Coil Winding Specialist. Any reproduction in part or whole without written permission of CMS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE		JLL	3/24/11		

DC BIAS @10KHZ	0A	2A	4A	6A	10A	13A	17A
28.7 uH	26.7 uH	24.0 uH	23.7 uH	18.9 uH	16.3 uH	13.7 uH	



- WIRE: UL RECOGNIZED 155°C RATED MAGNET WIRE
CWS BYTEMARK (www.cwsbytemark.com) OR APPROVED VENDOR
CORE: COATED SENDUST/KOOLMU TOROIDAL CORE
- RATING CLASS B (130°C MIN.) REQUIRED
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

- READ TEXT FROM BOTTOM UP
NOTES: TOROIDAL POWER CHOKE. ALL DIMENSIONS IN INCHES [MM]

PARTS LIST

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD X			
SOLIDWORKS			
SIGN	DATE	sales@coilws.com 353 W Grove Ave Orange, CA 92865	
DRWN	DATE	Coil Winding Specialist, Inc.	
ENGR	DATE	www.coilws.com	
CHKD	DATE	TITLE: Toroidal Power Inductor	
ENGR	DATE	27 uH, 17 Amp	
APPR	DATE	SIZE Dwg. No.	REV
JLAW	03/24/11	B	A
SCALE NOT TO SCALE		SHEET 1 OF 1	