


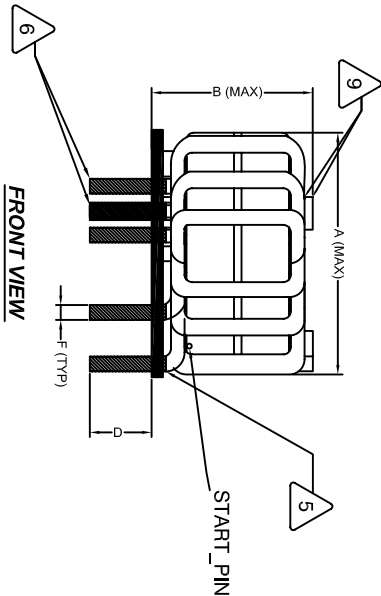


DIMENSIONAL TOLERANCE INCHES [MM]					REVISION HISTORY				
A(OD) Max	B(HGT) Max	C(OD) TYP	D(LEAD) Min	F (Lead Dia) TYP	REV	ECN	DESCRIPTION	BY	SIGN & DATE DATE CHK DATE
2.30 [58.00]	1.30 [33.00]		0.394 [10.0]	0.790 [2.00]	A		PRODUCTION RELEASE	AK	6/12/12 JLU 6/12/12

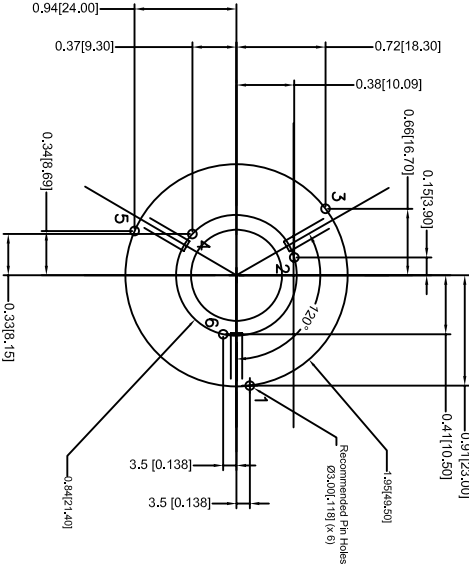

SCHEMATIC



MOUNTING HOLES PATTERN

3 SPECIFICATIONS AT 25°C:

WIRE: UL RECOGNIZED 200°C RATED MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
CORE: NANOCRYSTALLINE OR AMORPHOUS CORE

1 CASE RATING CLASS B (130°C) REQUIRED
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ NOTES FROM BOTTOM TO TOP.
CAGE CODE: 5DME2

QTY	CODE	MFG. P/N	DESCRIPTION	ITEM NO.
	IDENT			

PARTS LIST		TITLE:	
AUTOCAD	X	Nanocrystalline Inductor	
SOLIDWORKS		Three-Phase Common Mode Choke	
SIGN	DATE	Horizontal Mount	
DRWN	GN	6/12/12	
CHKD	AK	6/12/12	
ENGR.	JLU	6/12/12	
APPR.	JLU	6/12/12	

UNLESS OTHERWISE SPECIFIED	SCALE	2=1	SHEET 10F	1
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M	SIZE [DIM. NO.]	B	TPC-402U-B25A	REV A
ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	DATE	6/12/12		
TOLERANCE INCHES: 0.005 ±0.005	DATE	6/12/12		
TOLERANCE METRIC: 0.127 ±0.127	DATE	6/12/12		
ANGLE PROJECTION	DATE	6/12/12		
DO NOT SCALE DRAWING	DATE	6/12/12		