




DIMENSIONAL TOLERANCE INCHES [MM]								REVISION HISTORY						
A(OD) Max	B(HGT) Max	D1(LEAD) Min	D(LEAD) Min	E TYP	F (Lead Dia) TYP	G TYP	H Min	REV	ECN	DESCRIPTION	SIGN & DATE			
											BY	DATE	CHK	DATE
								A	140625	PRODUCTION RELEASE	AK	07/16/14	BO	07/16/14
2.700 [68.58]	1.800 [45.72]	0.500 [12.70]	0.750 [19.05]	2.58 [65.53]	0.064 [1.63]	0.600 [15.23]	0.300 [7.61]							

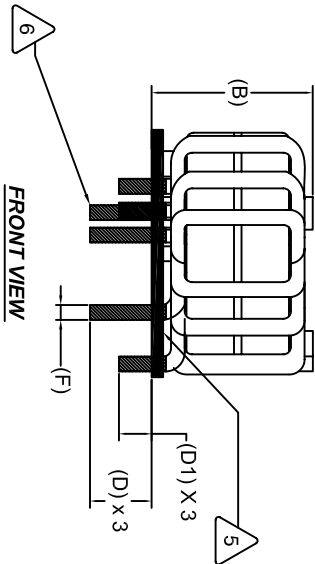


FRONT VIEW



SCHEMATIC

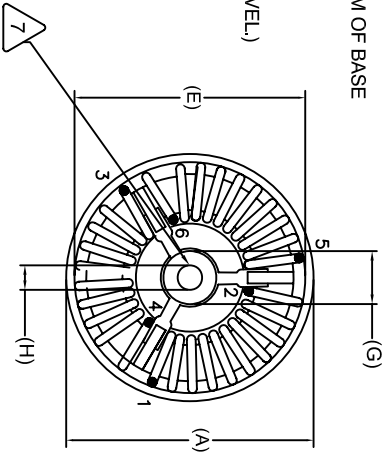

TOP VIEW

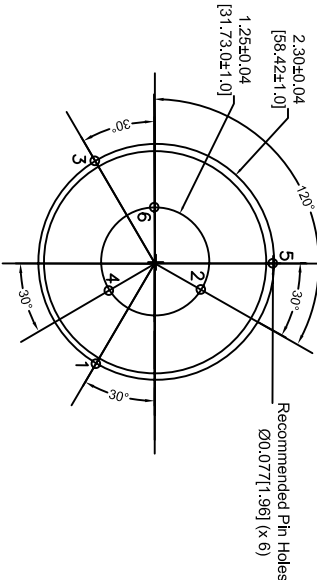

MOUNTING HOLES PATTERN

- 1 CASE RATING CLASS B (130°C) REQUIRED MATERIAL: UL RECOGNIZED FOR FLAMMABILITY
 - 2 CORE: NANOCRYSTALLINE OR AMORPHOUS CORE
 - 3 SPECIFICATIONS AT 25°C:
WIRE: UL RECOGNIZED 200°C RATED MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
CORE: NANOCRYSTALLINE OR AMORPHOUS CORE
- NOTES: UNLESS OTHERWISE SPECIFIED, READ NOTES FROM BOTTOM TO TOP.
CAGE CODE: 5DME2

AUTOCAD		X		www.coilw.com		Coil Winding Specialist Inc.	
SOLIDWORKS		SIGN		DATE		353 West Grove Ave Orange, California. 92665	
UNLESS OTHERWISE SPECIFIED DIMENSIONING AND TOLERANCE PER ANSI Y14.5M ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		DRAWN AK		07/16/14		TITLE: Nanocrystalline Inductor Three-Phase Common Mode Choke Horizontal Mount	
TOLERANCE INCHES: X.XX ±0.005 X.X ±0.003 X.XX ±0.0025 TOLERANCE METRICS: X.XX ±0.127 X.X ±0.38 X.X ±0.30		CHECKED BO		07/16/14		SIZE [DWG. NO.] B TPC-573U-B17A	
ANGLE PROJECTION		APPR. JLAU		07/16/14		REV A	
DO NOT SCALE DRAWING				SCALE N/A		SHEET 10F 1	