
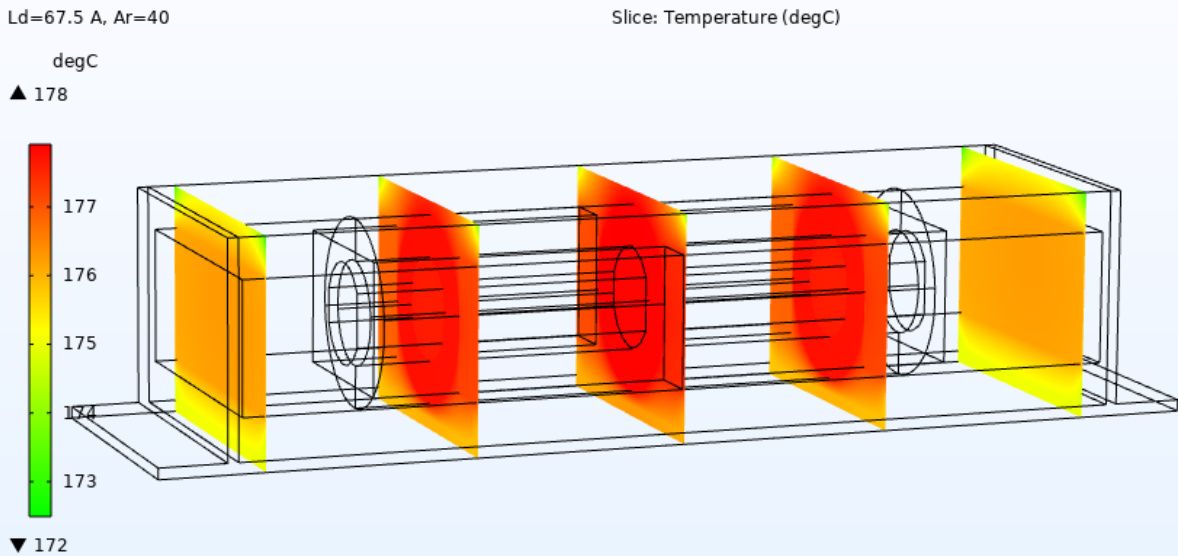
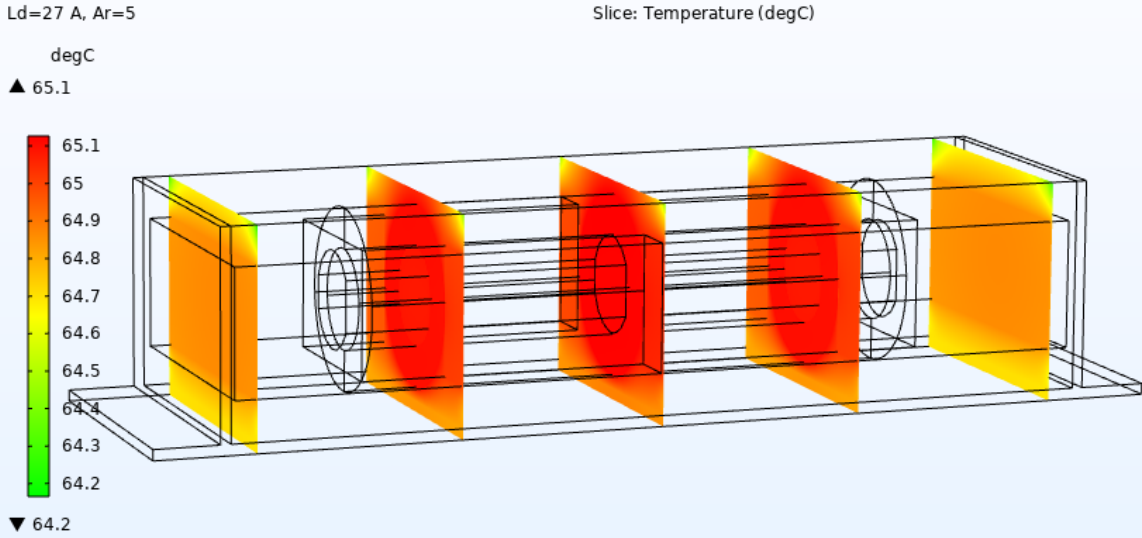
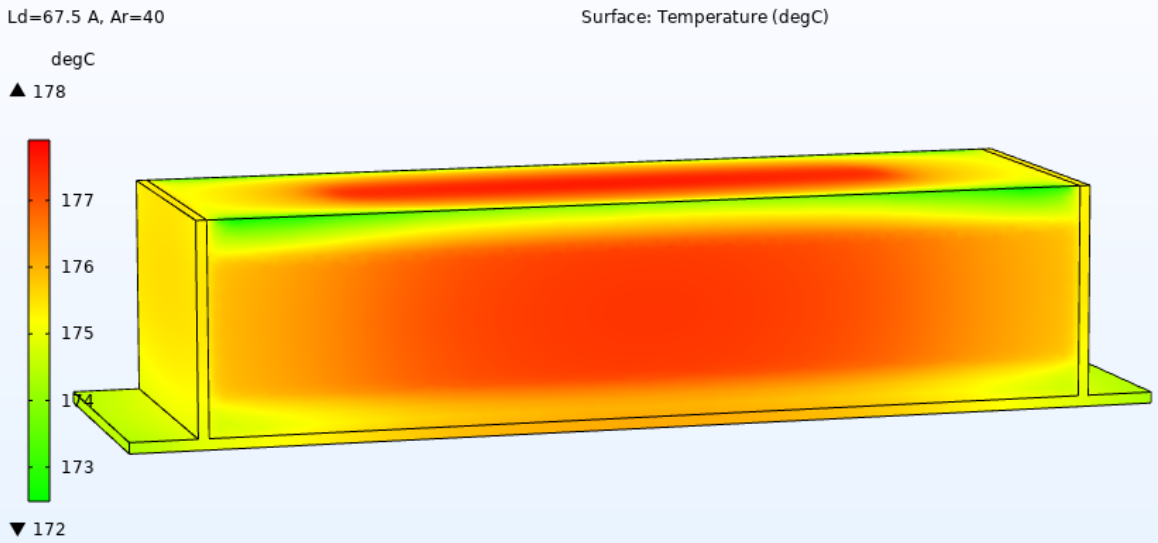





Current 30% (27A)
No Airflow
Natural convection

Thermal and Electromagnetics simulation – Part # EE70340-313X – Current rated 90A @ 10kHz


Current 75% (67.5A)
45 W/(m²K) or
15 m/s air flow.

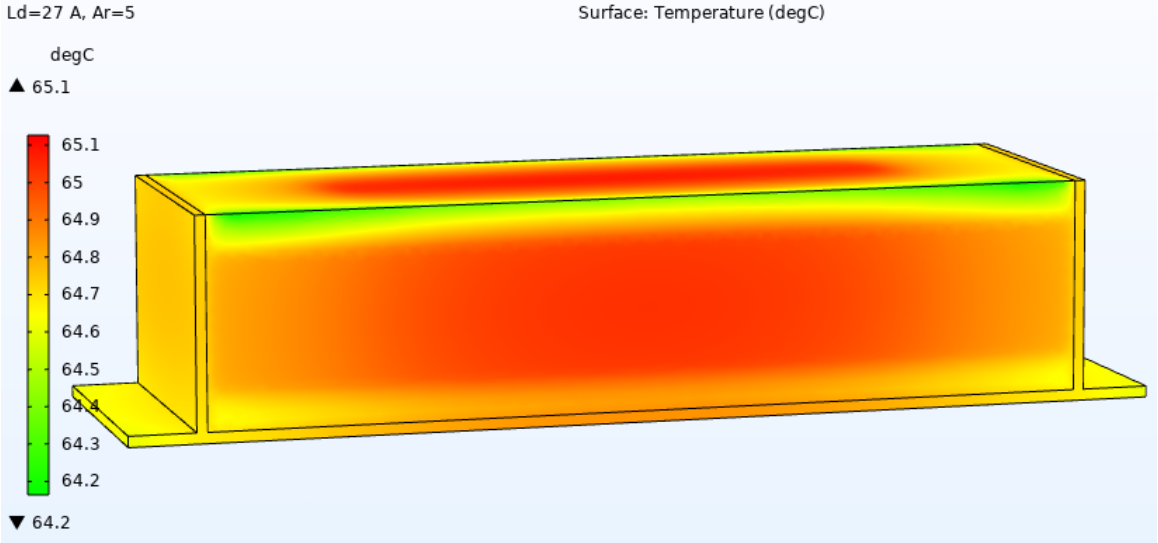

Thermal and Electromagnetics simulation – Part # EE70340-313X– Current rated 90A @ 10kHz

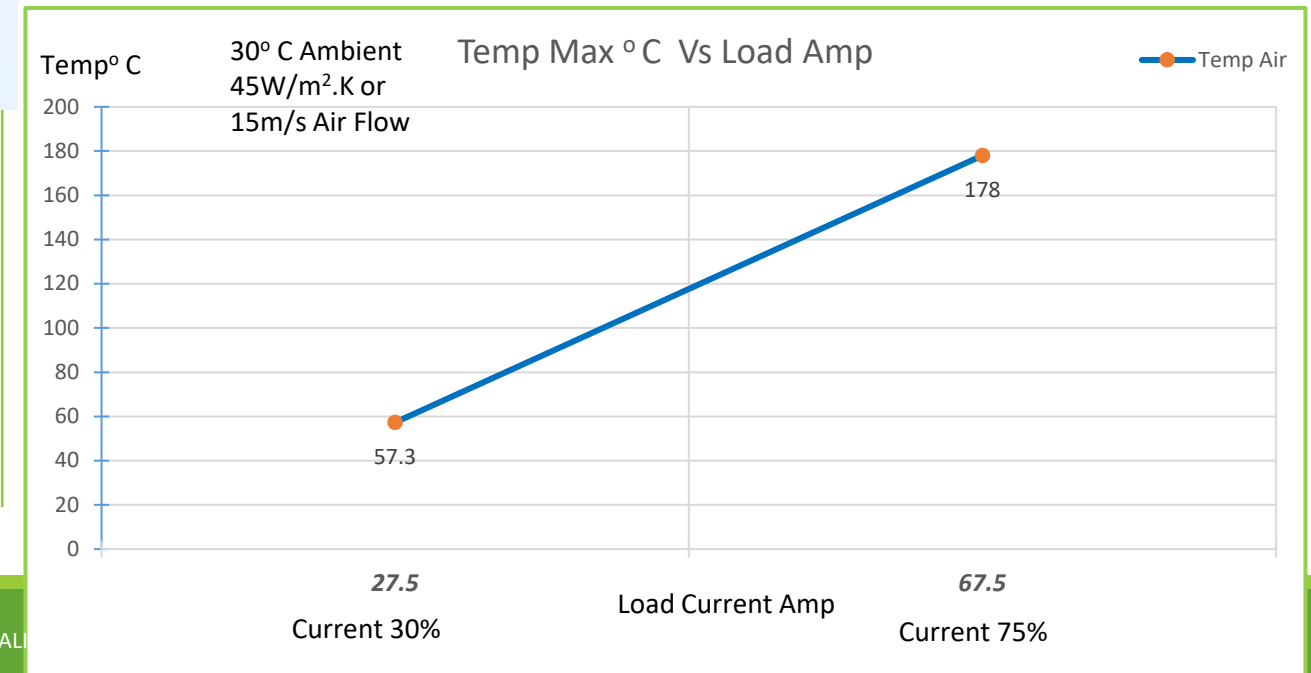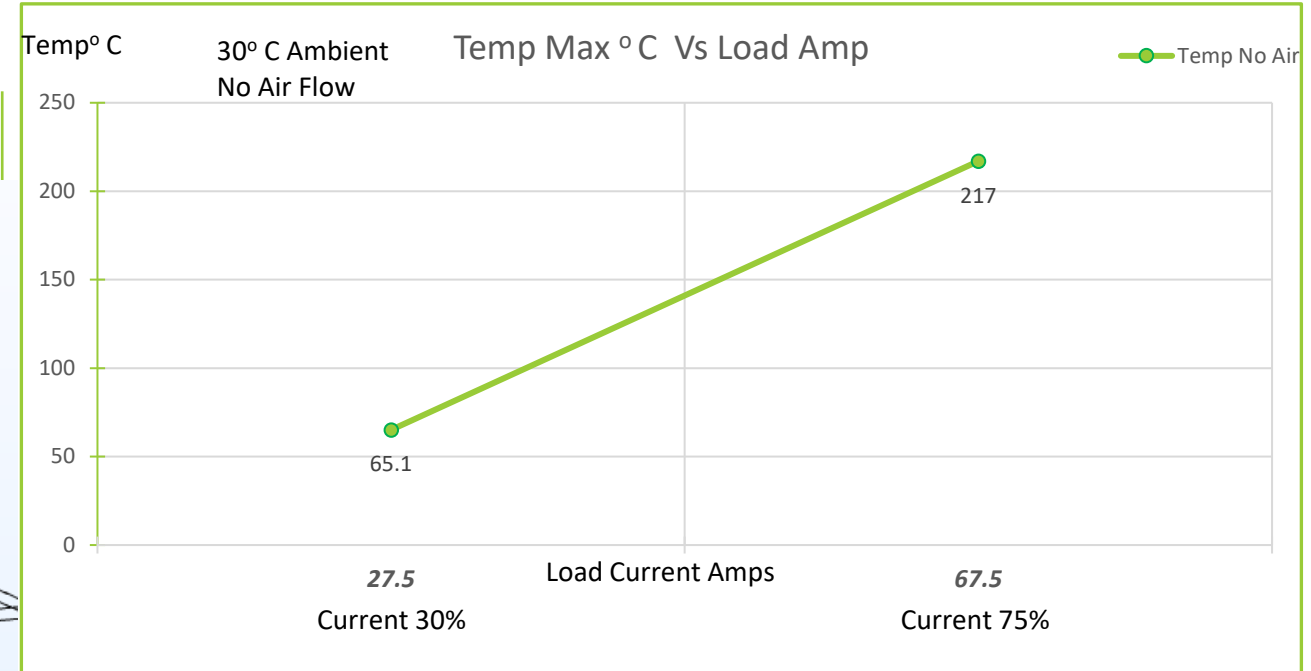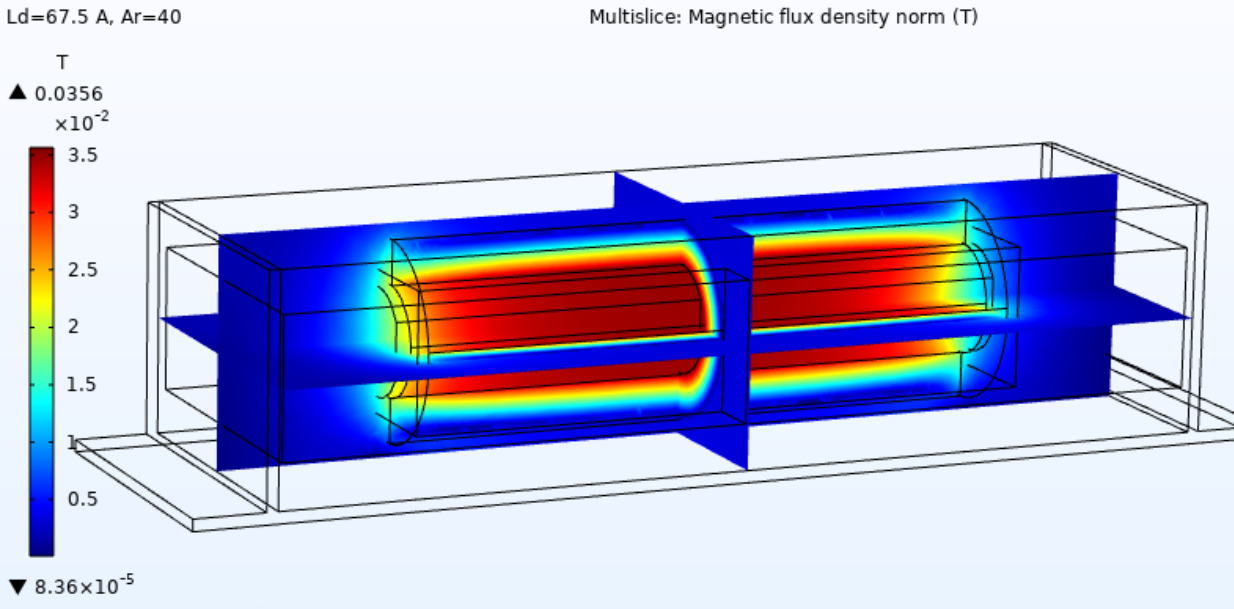


COIL FLUX

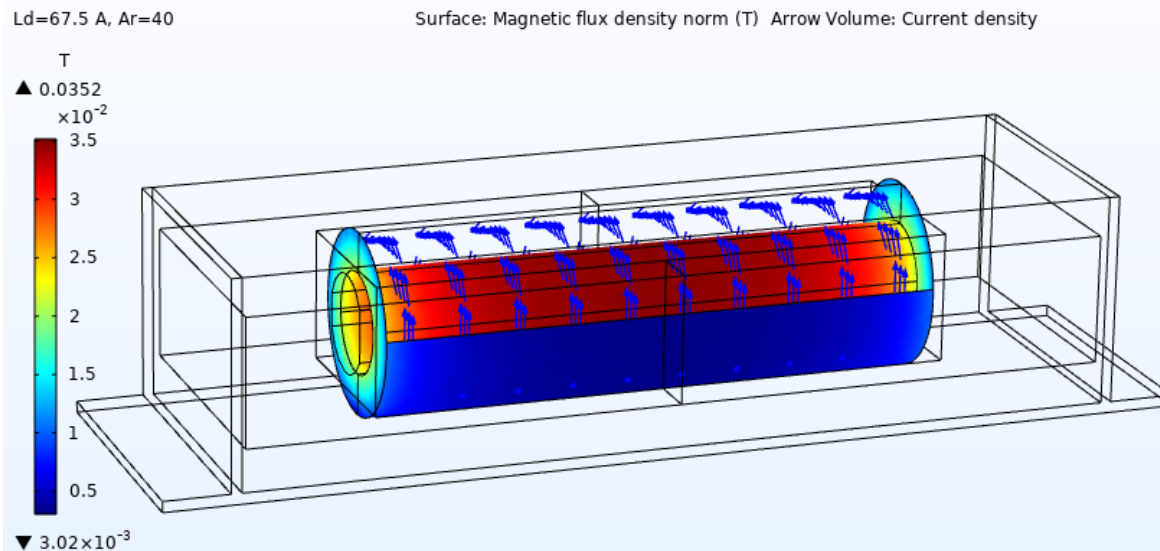

CORE FLUX

Ld=67.5 A, Ar=40

Slice: Magnetic flux density norm (T) Arrow Volume: Magnetic flux density

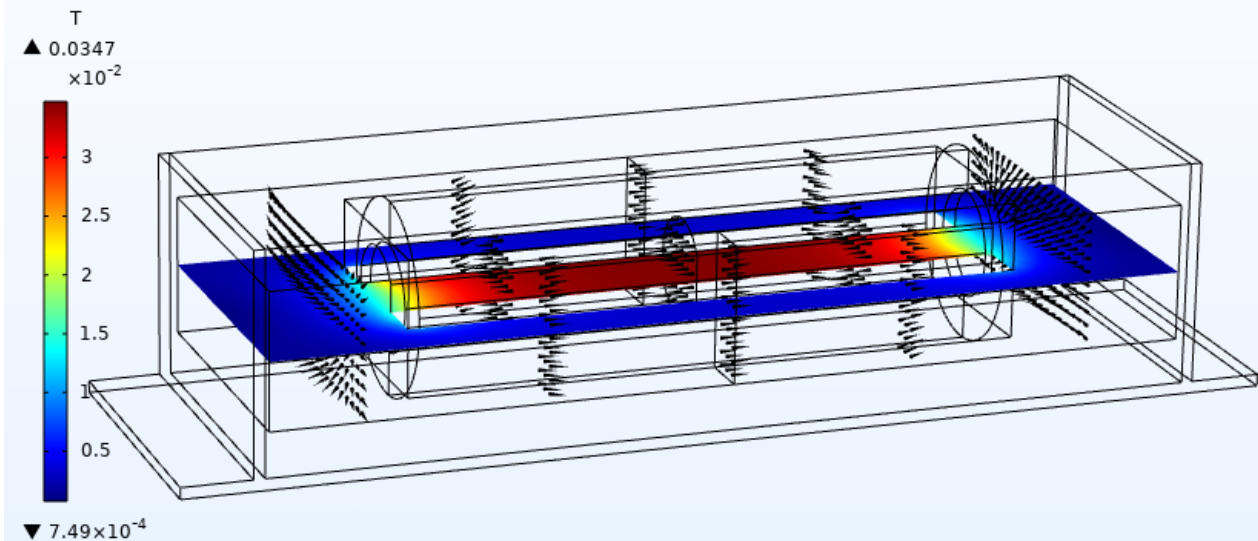

Abbreviations

Ld	: Current rated Amps
Ar	: Airflow
W/m ² .K	: Watts / Sq meter .Kelvin – Heat Convection rate
m/s	: Meter/ Second - Airflow
degC	: Temperature in Deg C
T	: Tesla – Magnetic Flux density
Temp	: Temperature
Temp max:	Temperature Maximum
Amb	: Ambient Temperature
Amps	: Ampere Load current.
Slice	: Sectional view

Disclaimer :

- Simulation MODEL is an effective tool for evaluating product performance by simulation; however, it does not simulate product performance in all test environments and is not intended to be a replacement for testing of the actual device by means of a test board or otherwise.
- Simulation results are for reference purposes only; CUSTOMER shall perform thorough testing using the actual device.