



Thermal and Electromagnetics simulation – Part # HCS-801M-350A– Current rated 350A @ 10kHz

Current 30% (105 A)
No Airflow
Natural convection



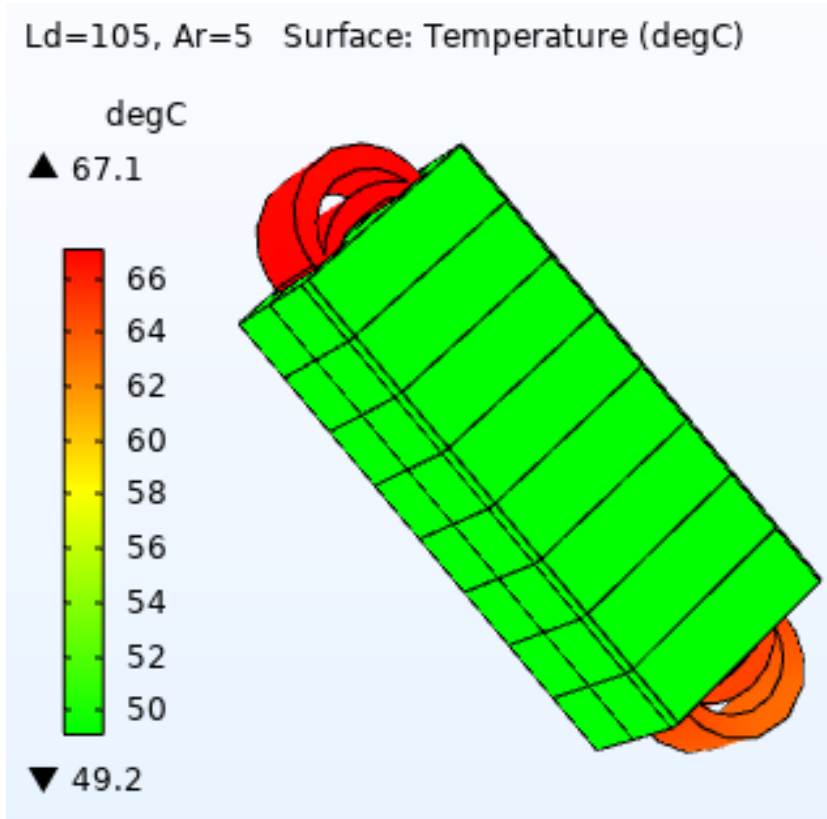


Current 75% (262A)
15 W/(m²K) or 3 m/s air flow..

Additional external forced air
cooling of air flow 10 cm/s
needed

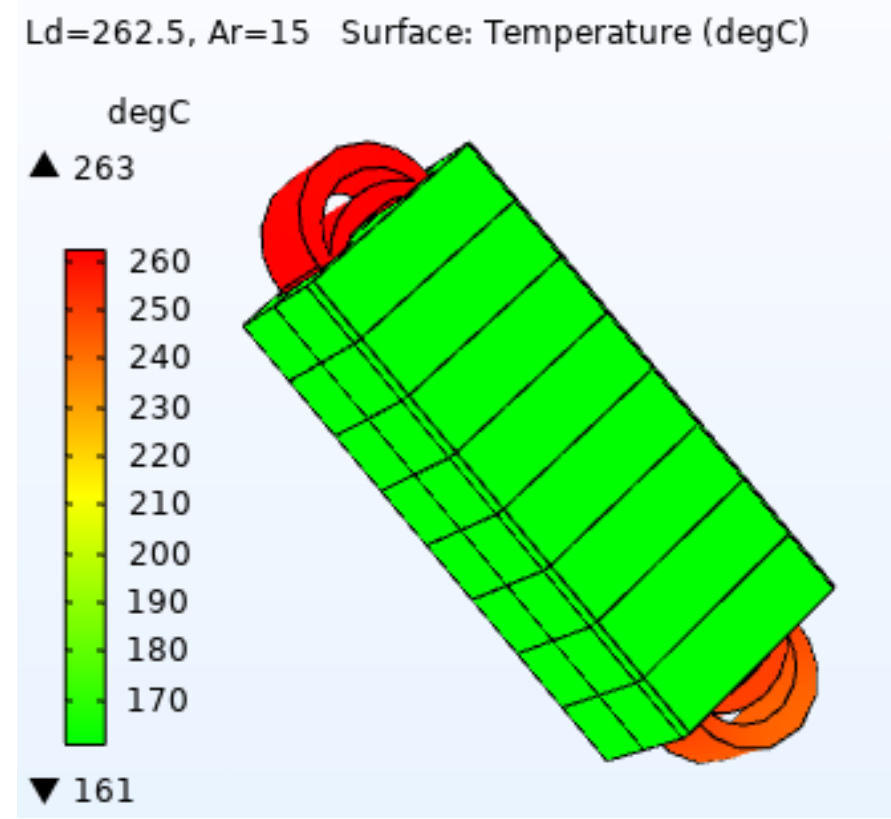


Thermal and Electromagnetics simulation – Part # HCS-801M-350A– Current rated 350A @ 10kHz

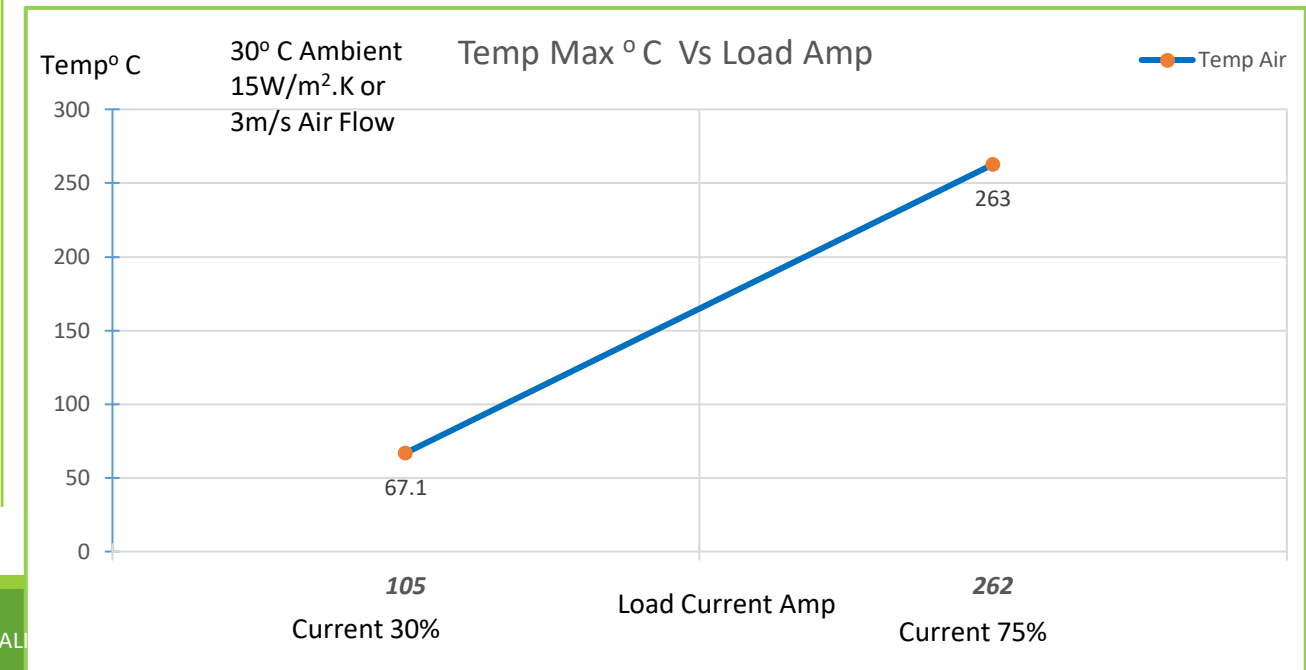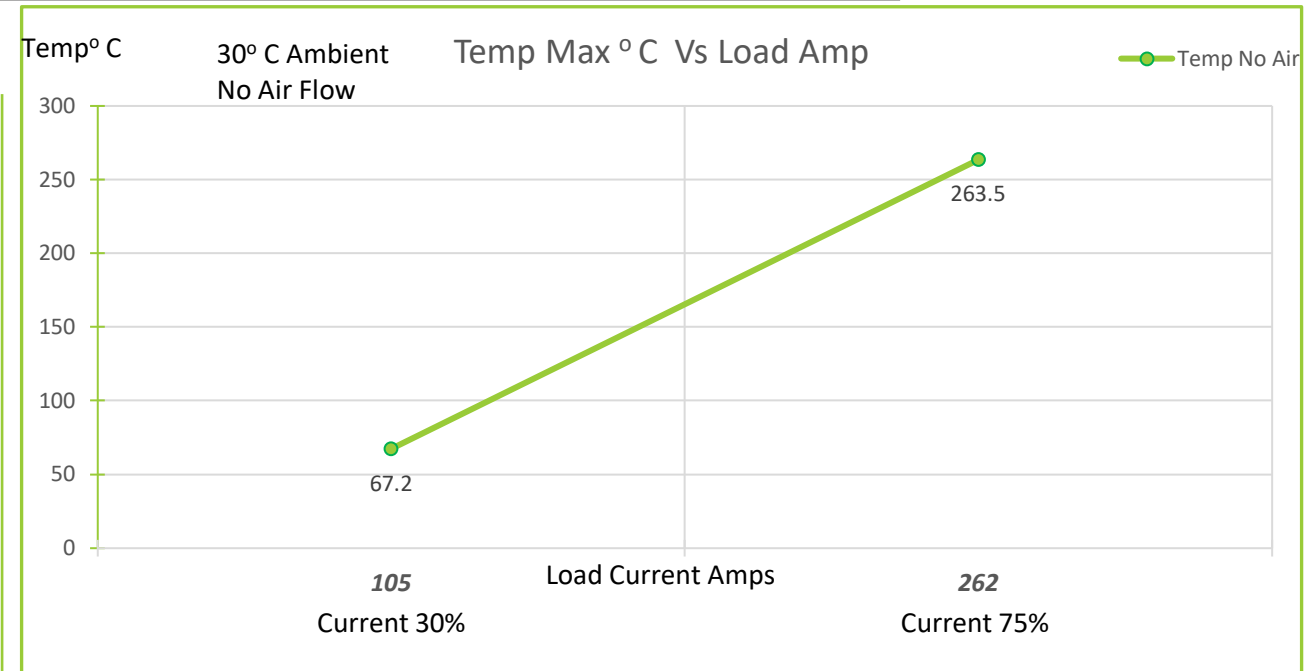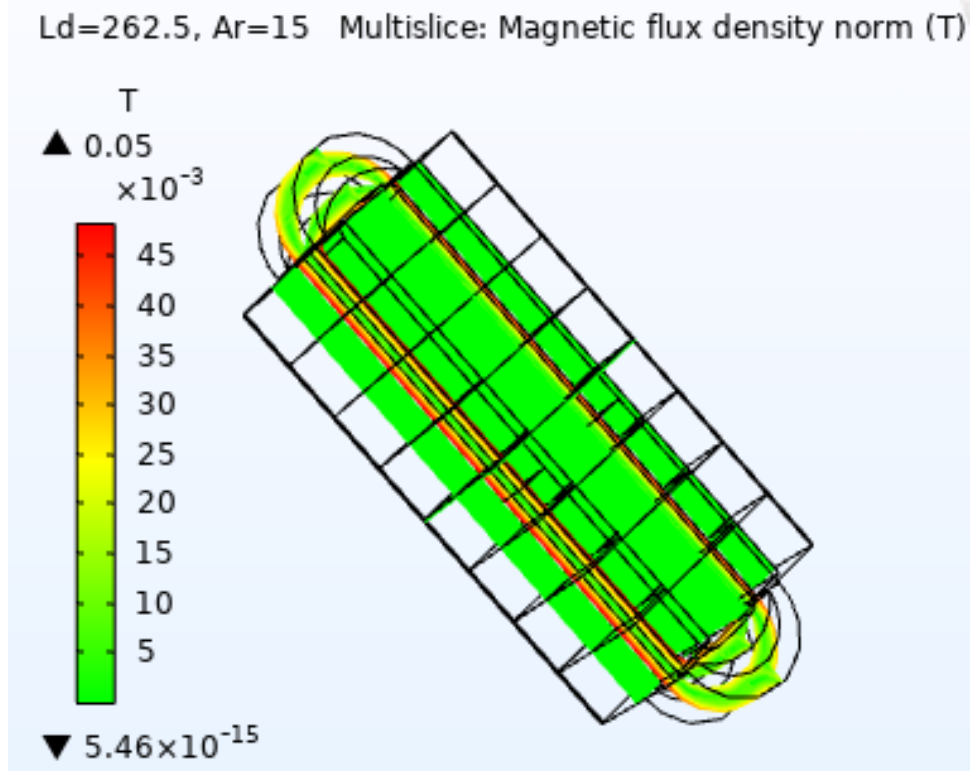


Coil Flux

Ld=262.5, Ar=15 Surface: Magnetic flux density norm (T)
Arrow Volume: Magnetic flux density

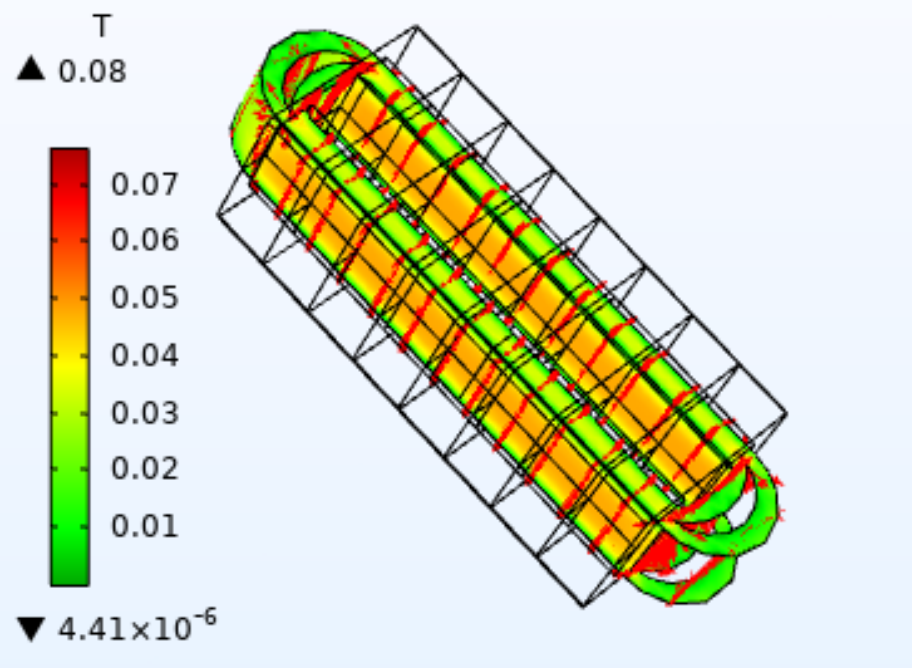

Core flux

Ld=262.5, Ar=15 Slice: Magnetic flux density norm (T)
Arrow Volume: Magnetic flux density

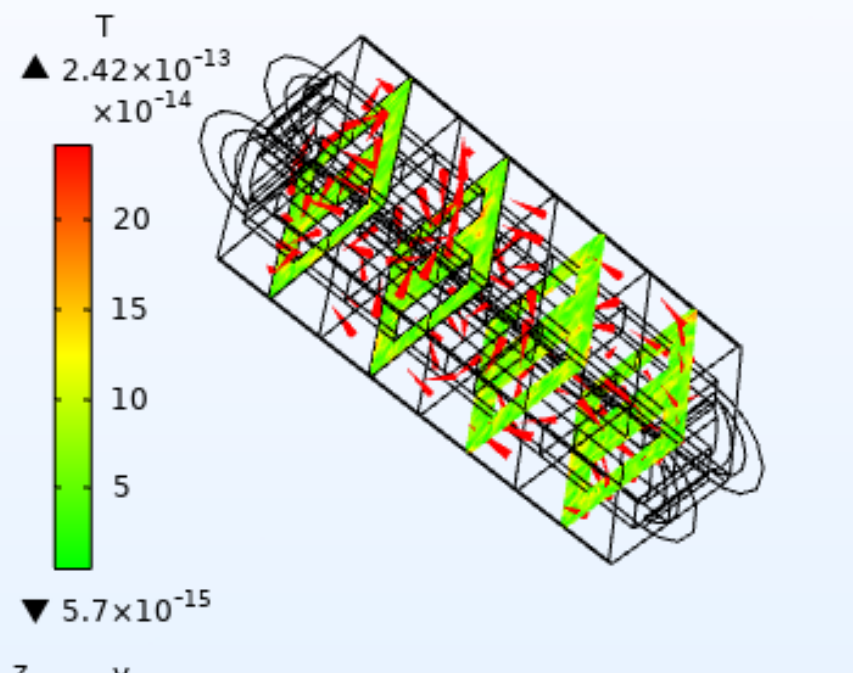

Abbreviations

Ld	: Current rated Amps
Ar	: Airflow
W/m ² .K	: Watts / Sq meter .Kelvin – Heat Convection rate
m/s	: Meter/ Second - Airflow
degC	: Temperature in Deg C
T	: Tesla – Magnetic Flux density
Temp	: Temperature
Temp max:	Temperature Maximum
Amb	: Ambient Temperature
Amps	: Ampere Load current.
Slice	: Sectional view

Disclaimer :

- Simulation MODEL is an effective tool for evaluating product performance by simulation; however, it does not simulate product performance in all test environments and is not intended to be a replacement for testing of the actual device by means of a test board or otherwise.
- Simulation results are for reference purposes only; CUSTOMER shall perform thorough testing using the actual device.