
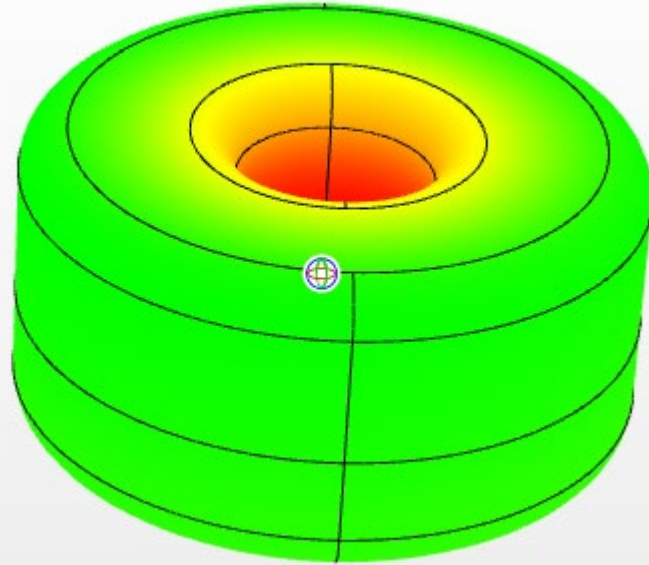


Thermal and Electromagnetics simulation – Part# SN270-171M-8.0AH– Current rated 8A @ 1kHz

Current 30% (2.4A)
No Airflow
Natural convection


Lp=2.4 A, Ar=5

Surface: Temperature (degC)

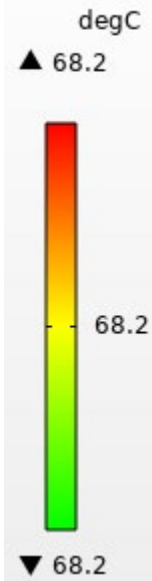

Lp=5.6 A, Ar=15



Surface: Temperature (degC)

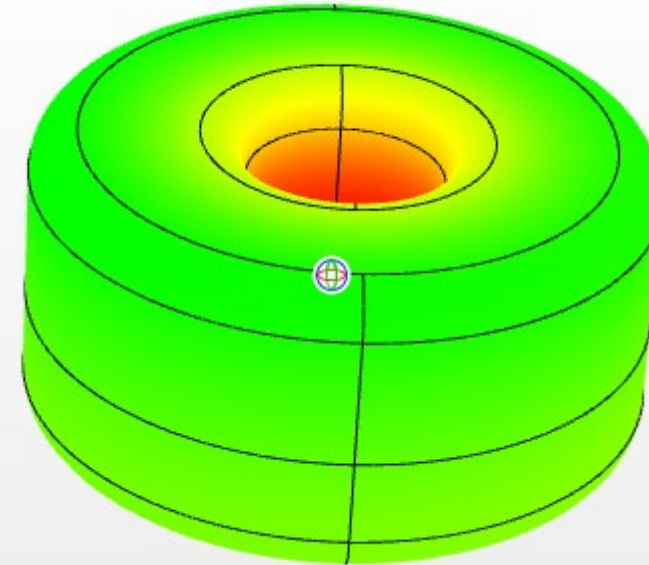

Current 70% (5.6A)
15 W/ (m²K) or 3 m/s
air flow.



Lp=2.4 A, Ar=5




Slice: Temperature (degC)

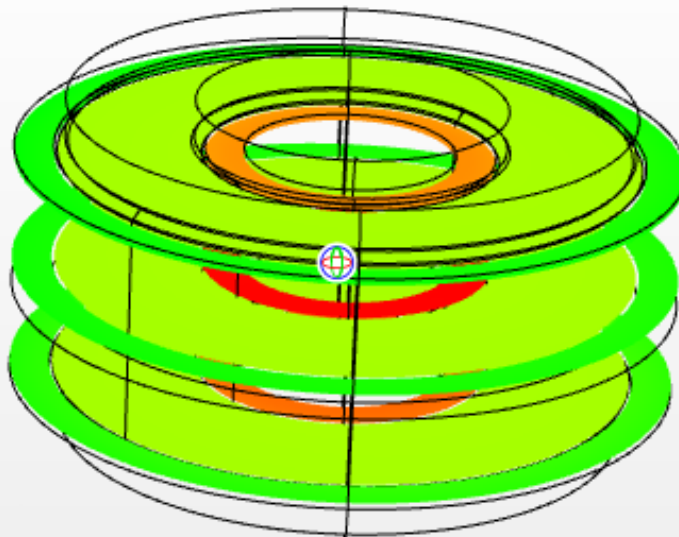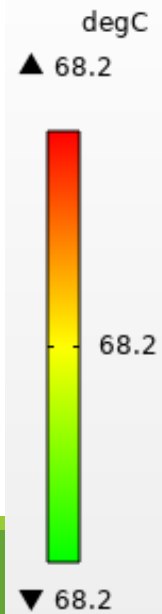

Lp=5.6 A, Ar=15

Slice: Temperature (degC)

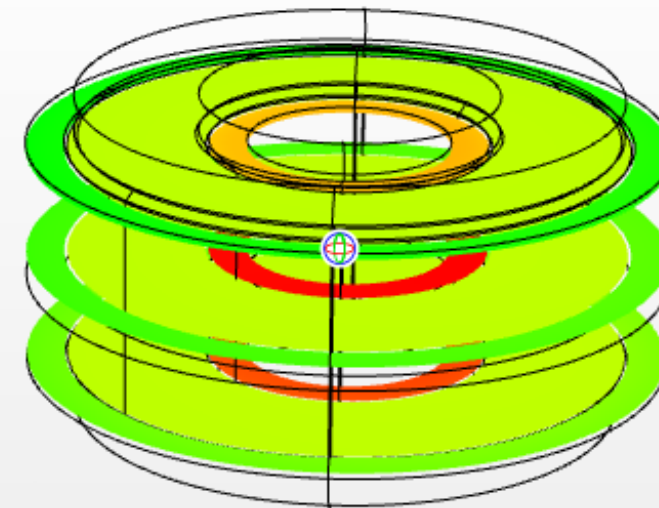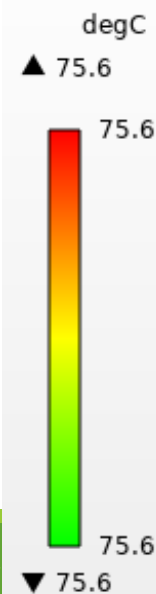


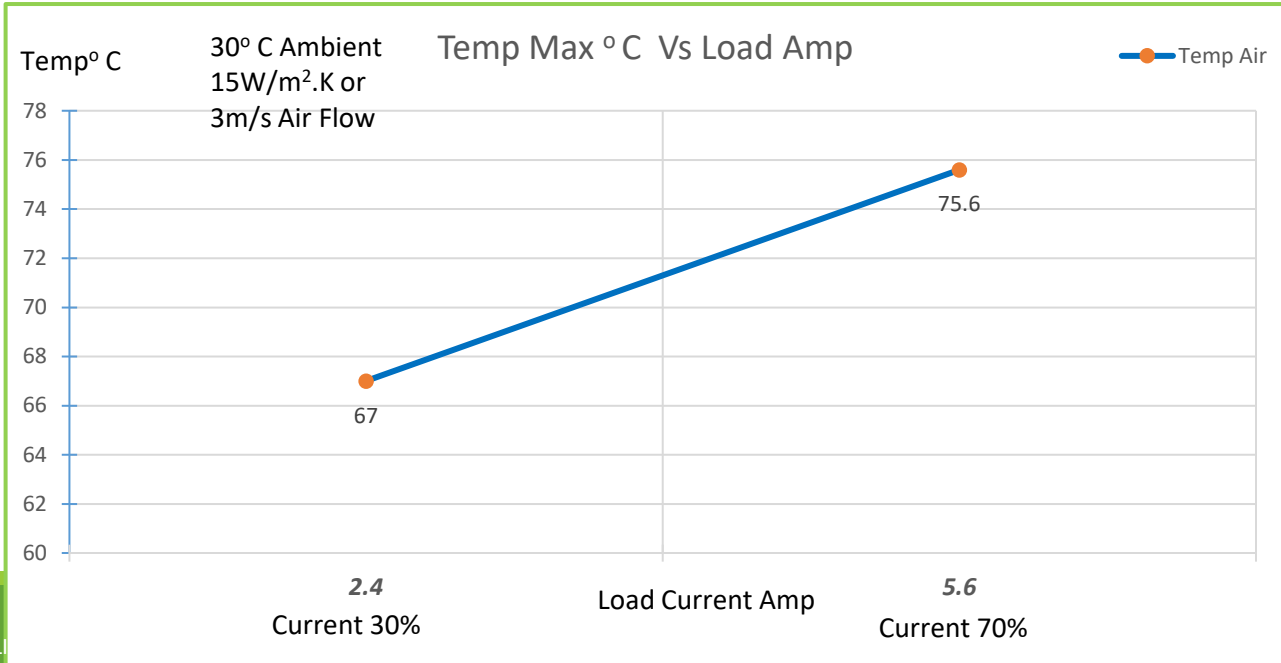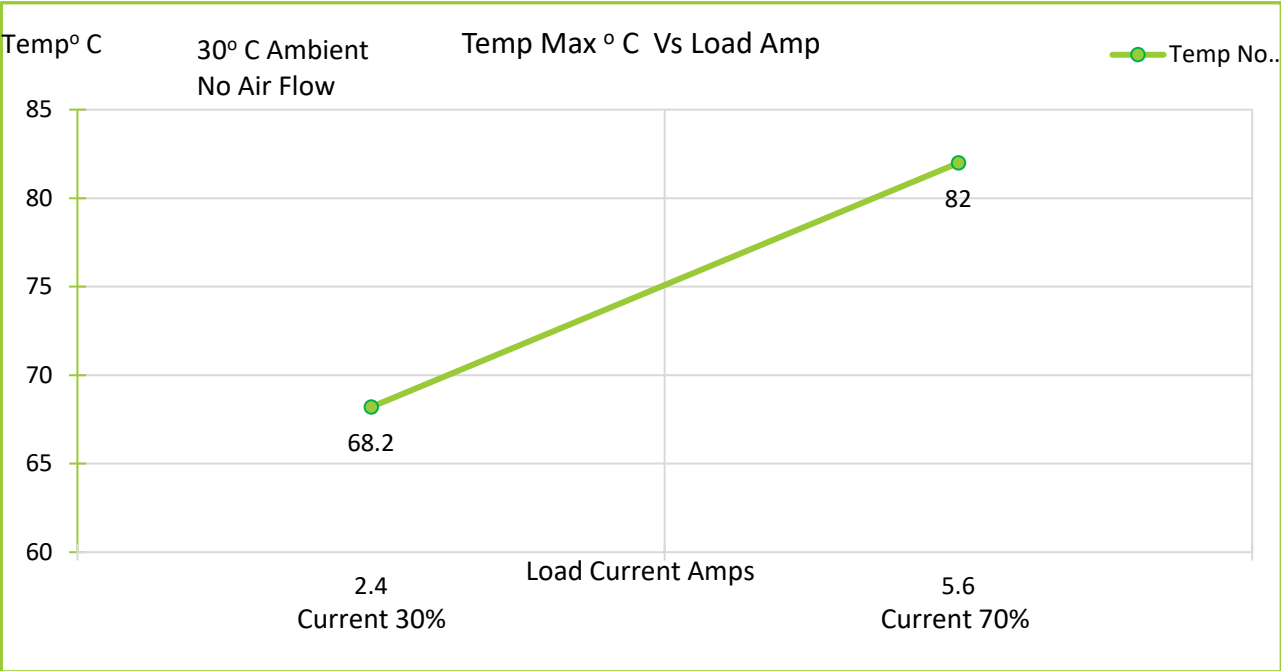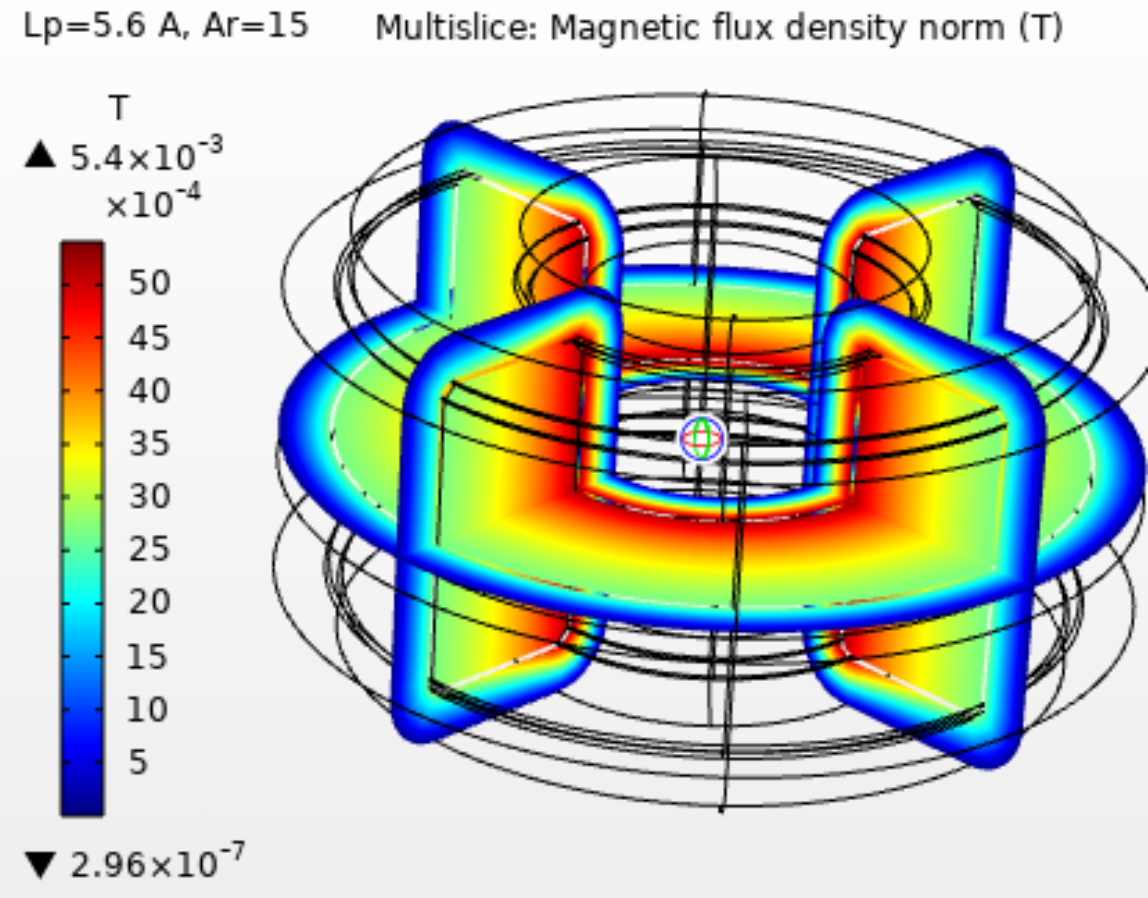

Magnetics Flux in Coil

Lp=5.6 A, Ar=15

Surface: Magnetic flux density norm (T)
Arrow Volume: Current density
Arrow Surface: Conductive heat flux

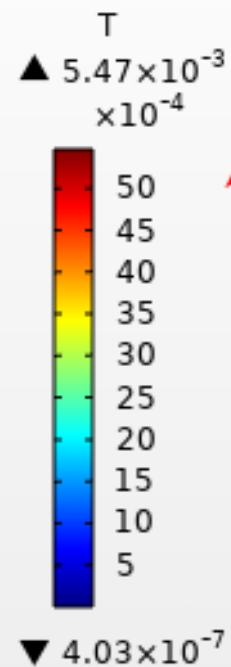


Magnetic Flux in Core

Lp=5.6 A, Ar=15

Arrow Volume: Magnetic flux density
Volume: log(mf.normj)

▲ -14.1

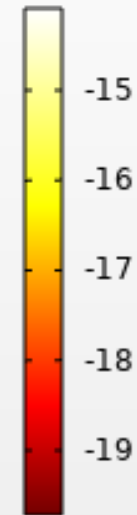

▼ -19.7

Abbreviations

Ld	: Current rated Amps
Ar	: Airflow
W/m ² .K	: Watts / Sq meter .Kelvin – Heat Convection rate
m/s	: Meter/ Second - Airflow
degC	: Temperature in Deg C
T	: Tesla – Magnetic Flux density
Temp	: Temperature
Temp max:	Temperature Maximum
Amb	: Ambient Temperature
Amps	: Ampere Load current.
Slice	: Sectional view

Note : For the modeling purpose the winding is considered as homogenous multilayer winding .

Disclaimer :

- Simulation MODEL is an effective tool for evaluating product performance by simulation; however, it does not simulate product performance in all test environments and is not intended to be a replacement for testing of the actual device by means of a test board or otherwise.
- Simulation results are for reference purposes only; CUSTOMER shall perform thorough testing using the actual device.