

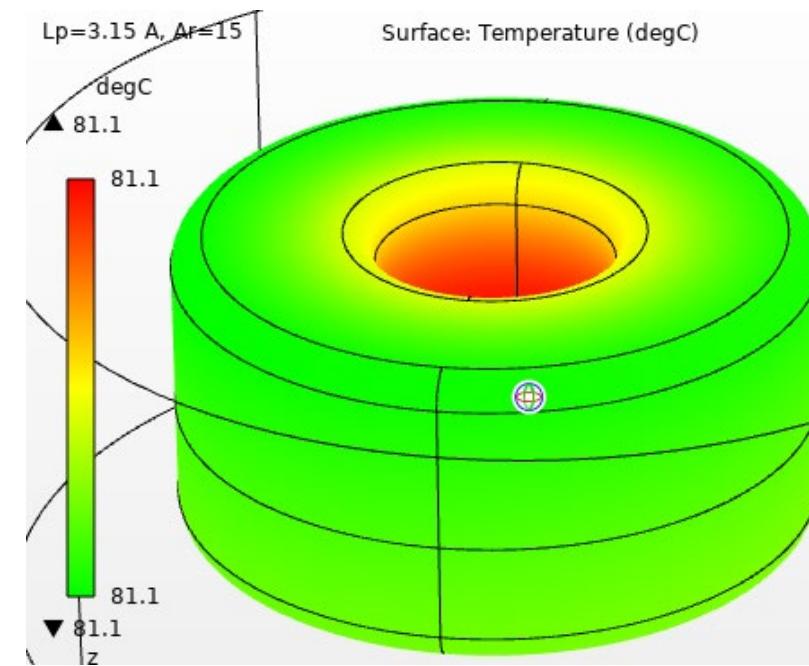


Thermal and Electromagnetics simulation – Part # SN270-471M-4.5AV– Current rated 4.5A @ 1kHz


Current 30% (1.35A)
No Airflow
Natural convection

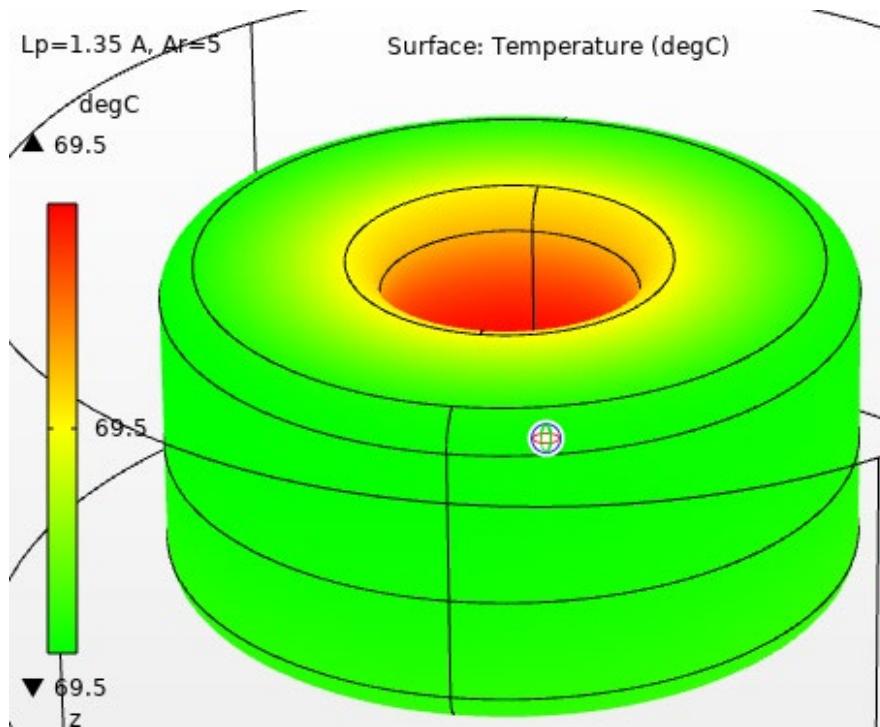




Current 70% (3.15A)
15 W/ (m²K) or 3 m/s
air flow.

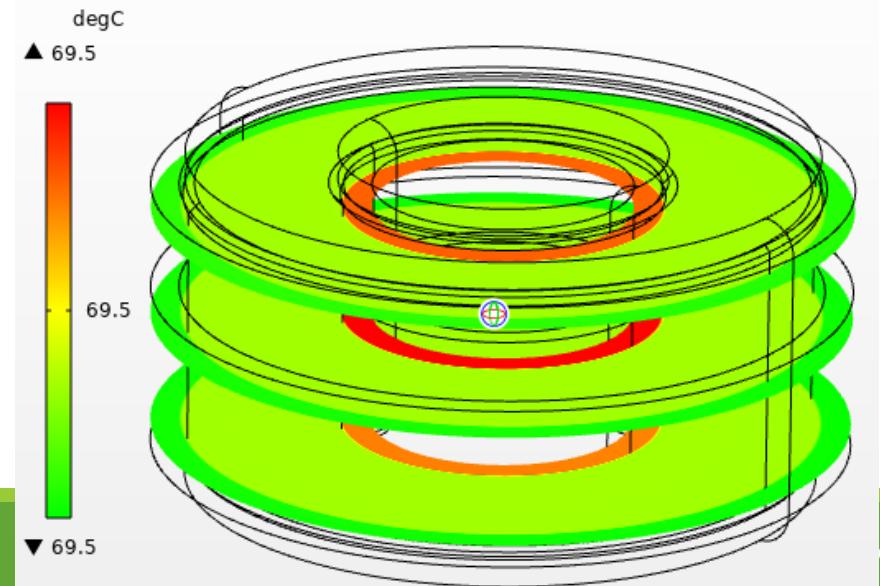

ING SPECIALIS

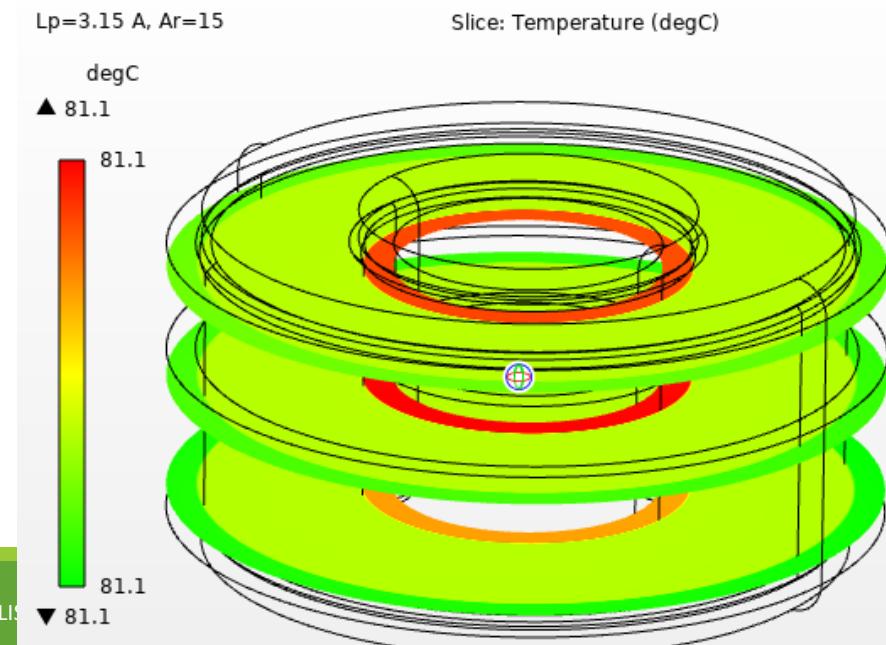


Thermal and Electromagnetics simulation – Part #SN270-471M-4.5AV– Current rated 4.5A @ 1kHz

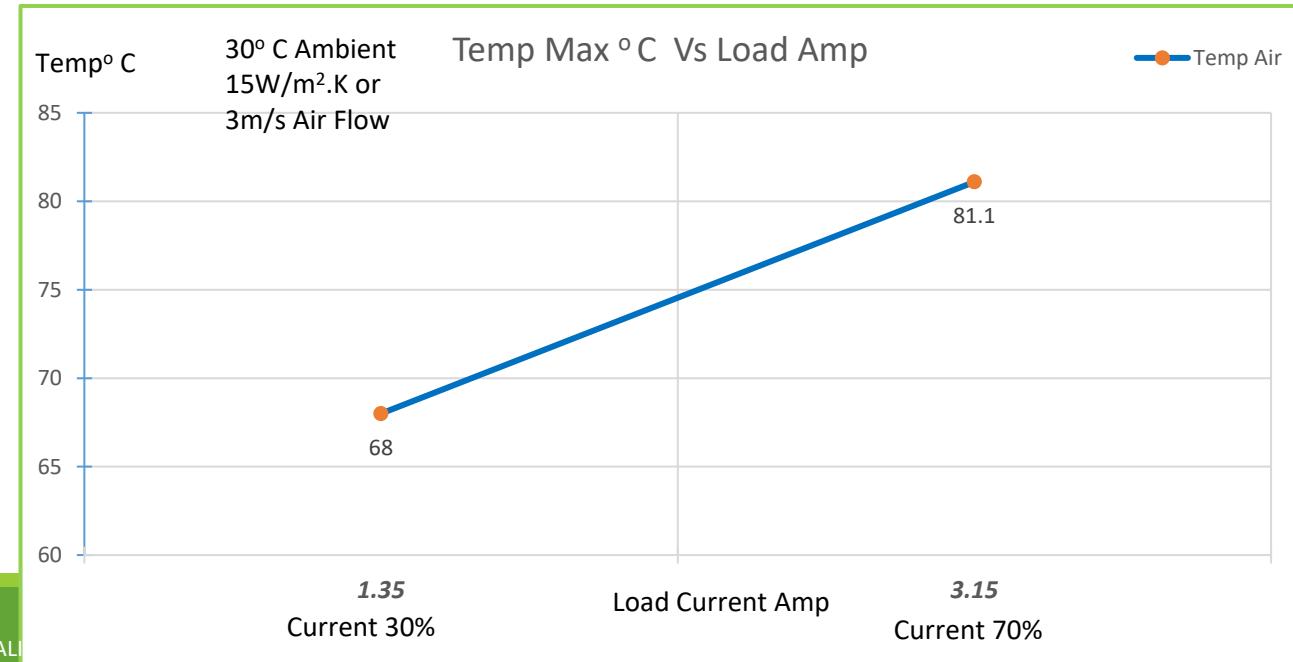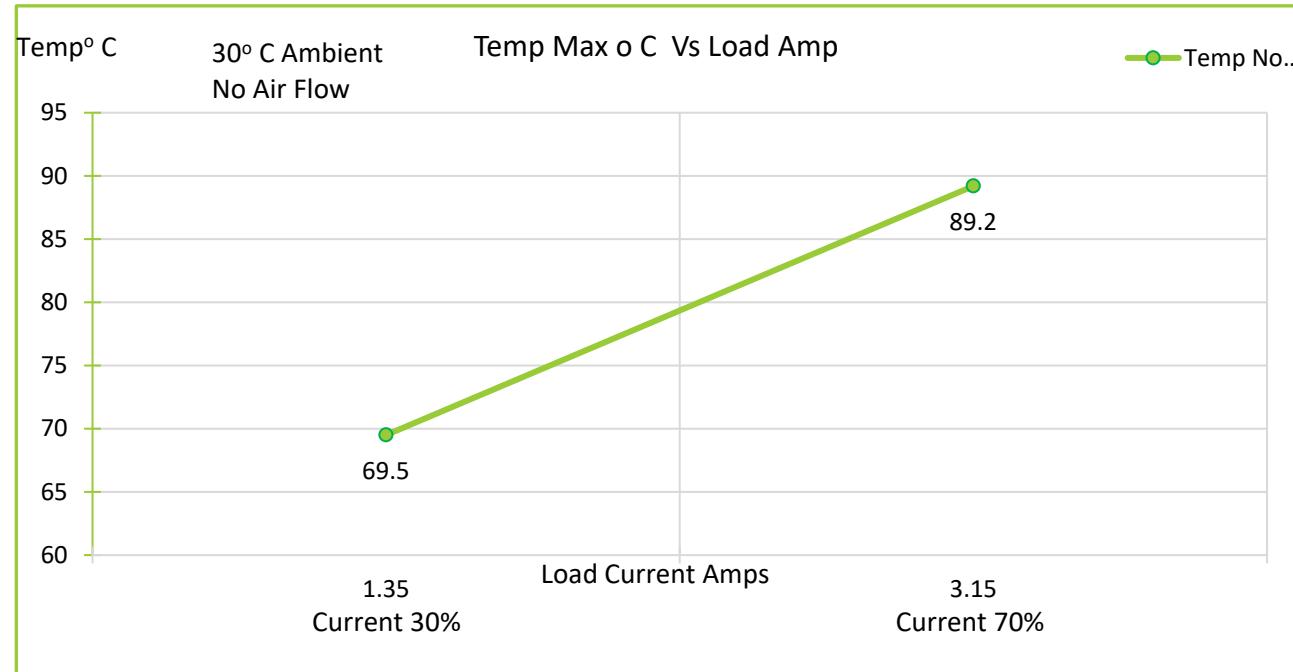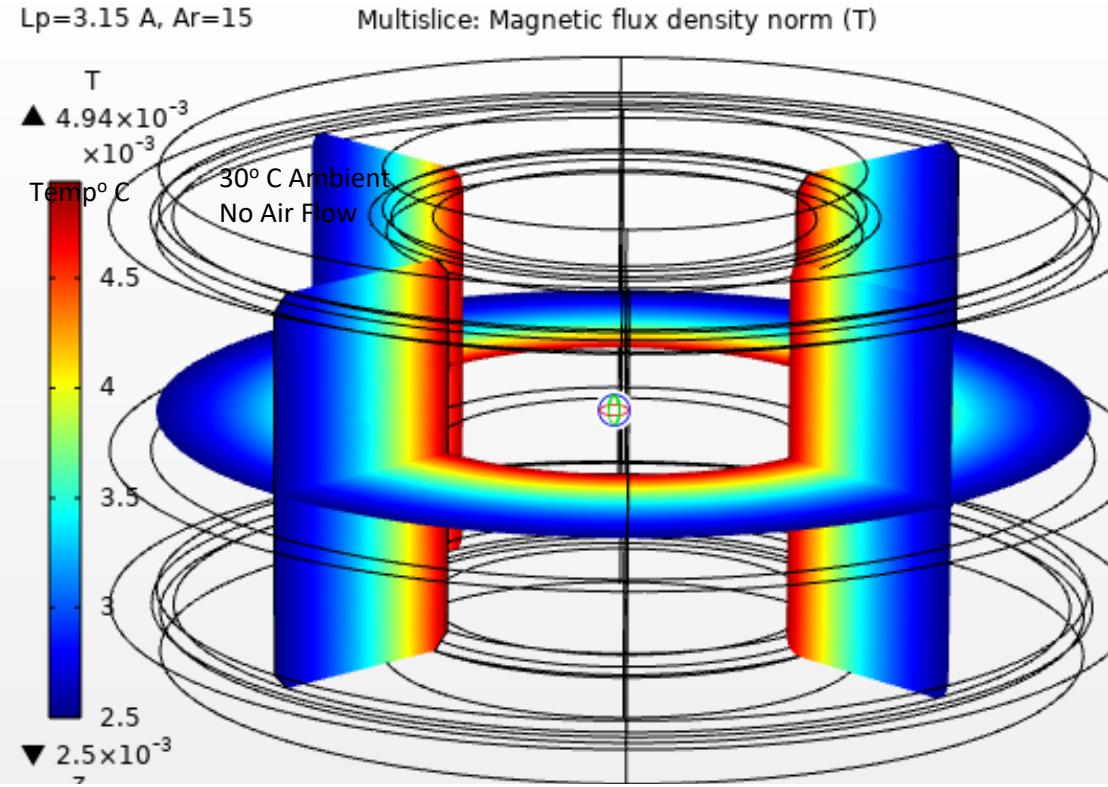

Magnetics Flux in Coil


$L_p=3.15 \text{ A}$, $A_r=15$ Surface: Magnetic flux density norm (T)
Arrow Volume: Current density Arrow Surface: Conductive heat flux

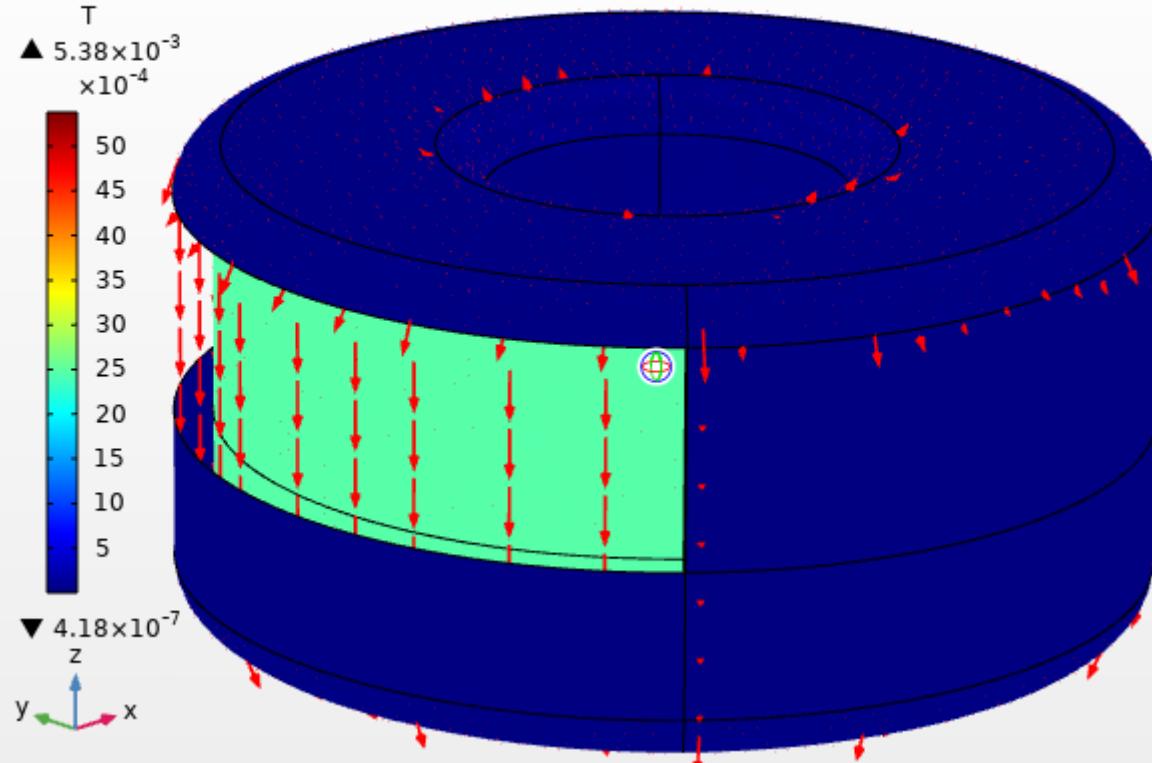

Magnetic Flux in Core

$L_p=3.15 \text{ A}$, $A_r=15$ Arrow Volume: Magnetic flux density Volume: log(mf.norm)

▲ -14.2

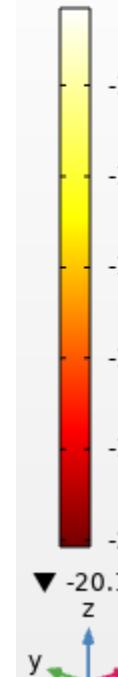

Abbreviations

Ld	: Current rated Amps
Ar	: Airflow
W/m ² .K	: Watts / Sq meter .Kelvin – Heat Convection rate
m/s	: Meter/ Second - Airflow
degC	: Temperature in Deg C
T	: Tesla – Magnetic Flux density
Temp	: Temperature
Temp max:	Temperature Maximum
Amb	: Ambient Temperature
Amps	: Ampere Load current.
Slice	: Sectional view

Note : For the modeling purpose the winding is considered as homogenous multilayer winding .

Disclaimer :

- Simulation MODEL is an effective tool for evaluating product performance by simulation; however, it does not simulate product performance in all test environments and is not intended to be a replacement for testing of the actual device by means of a test board or otherwise.
- Simulation results are for reference purposes only; CUSTOMER shall perform thorough testing using the actual device.