

Note: All measurements are carried out using rms value responding meter. The terminating resistor and the 1-turn primary are not supplied.

7 BUILD TO ROHS COMPLIANCE AND LEAD FREE

WHERE SHOWN MARK PART NUMBER AND REVISION

REMOVE INSULATION, SOLDERED TO LEADS

CONSTRUCTION: ENCAPSULATED USING BOBBIN. DIELECTRIC WITHSTANDING VOLTAGE (HI-POT): 2.5K Vrms FREQUENCY BAND: 50Hz - 60Hz OPERATING TEMP. = - 25 °C TO 80 °C DC RESISTANCE @ 25 °C = 186 OHMS PHASE SHIFT = 3.0' RATIO ERROR = -0.080 % BURDEN RESISTOR (RL) = 100 OHMS MIN AC PRIMARY CURRENT (I min) = 0.05 AMPS MAX AC PRIMARY CURRENT (I max) = 80 AMPS ACCURACY CLASS = 0.1 % OUTPUT VOLTAGE ( V out) = 1.017 V RATED PRIMARY CURRENT (Ir) = 0.05 A - 25 A

3 SPECIFICATIONS @ 25 °C:


WIRE: UL RECOGNIZED 130 °C RATED MAGNET WIRE CWS BYTEMARK OR OTHER APPROVED PART


CORE: TAPE WOUND

BOBBIN RATING CLASS B (130 °C) REQUIRED


1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY ALL MATERIAL USED ARE IN ACCORDANCE WITH UL REQUIREMENTS

UNIT: INCHES [MM]



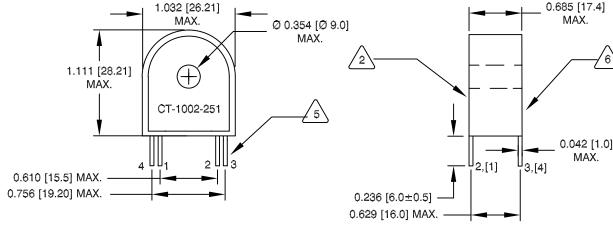

## FRONT VIEW



## **BOTTOM VIEW**

UNLESS OTHERWISE SPECIFIED

TOLERANCE PER ANSI Y14.5M

ALL DIMENSIONS ARE IN INCHES AND [MILIMETERS].

ANGLE PROJECTION ( CT

DIMENSIONING AND

PCB

SIDE VIEW 0.756 [19.20±0.3] 0.610[15.50±0.3] 0.610  $[15.5 \pm 0.3]$ MOUNTING HOLES PATTERN

CODE QTY Note: Pin 3 and 4 are only used IDENT for mechanical mounting on to AUTOCAD

CHECKED

KC

KC

KC

**PARTS** SOLIDWORKS COILWS COM. INC www.coilws.com SIGN DATE 25A Current Sense 05/22/09

MFG. P/N

SIZE DWG. NO.

В

LIST

CWS Coil Winding Specialist, Inc. 353 W. Grove Avenue Orange, CA 92865

SHEET

ITEM NO.

REV

Α

**Transformer** CT-1002-251

DESCRIPTION

DO NOT SCALE DRAWING NOT\_TO\_SCALE CAD-FILE:

05/22/09

05/22/09

05/22/09

CT-1002-251

