



The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
B		PRODUCTION RELEASE	RPR	5/30/05	JLJU	5/30/05
C		MAKE CORRECTION TO DIMENSIONS & IDENTIFY PIN #	KJC	10/14/08	CT	10/14/08
C1		MAKE CORRECTION TO DIMENSIONS	KJC	11/06/08	CT	11/06/08

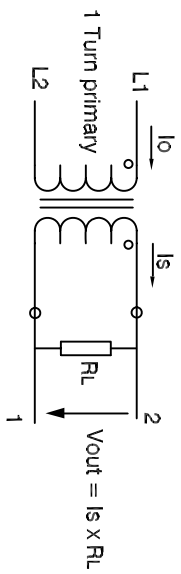

Note: All measurements are carried out using rms value responding meter. Unless requested the terminating resistor and the 1-turn primary are not supplied.

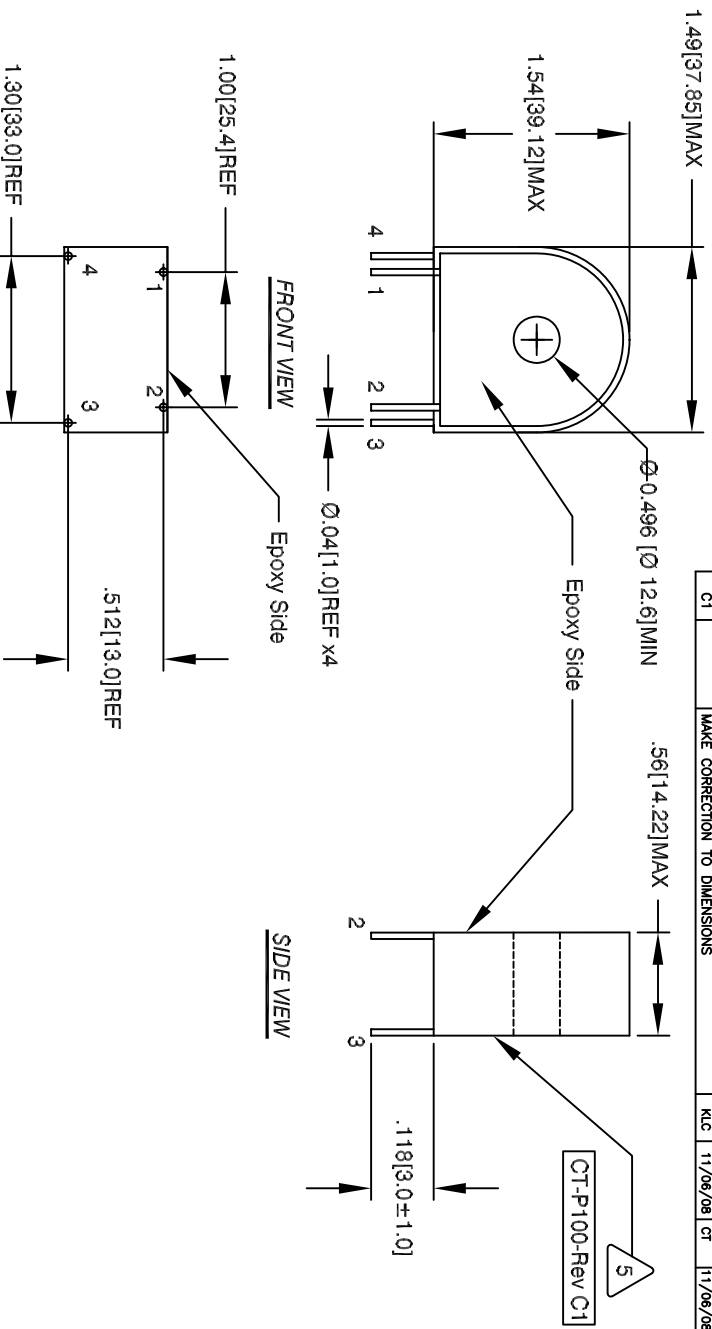

3 SPECIFICATIONS @ 25 °C :



1 WIRE: UL RECOGNIZED 130 °C RATED MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
CORE: TAPE WOUND CORE

2 BOBBIN RATING CLASS B (130 °C) REQUIRED
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED DIMENSION IN UNIT: INCHES [MM].

READ FROM BOTTOM UP.

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	

UNLESS OTHERWISE SPECIFIED	
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M AND (MILLIMETERS).	DRAWN RPR 5/30/05
TOLERANCE INCHES: XXX±.010 XX±.020 XX±.254 X±.51	ENGR. KSUM 5/30/05
ANGLE PROJECTION	APPR. JLJU 5/30/05
DO NOT SCALE DRAWING	

TITLE:		SIZE	DATE	SCALE	SHEET	OF
COLIWS COM, INC www.coliws.com		B	5/30/05	2=1	1	1
CWS Coil Winding Specialist. 353 W Grove Ave Orange, CA 92865		Current Sense Transformer, 80 Amp Max Compatible to Vac E4626-X501				
CT-P100						
REV C1						