
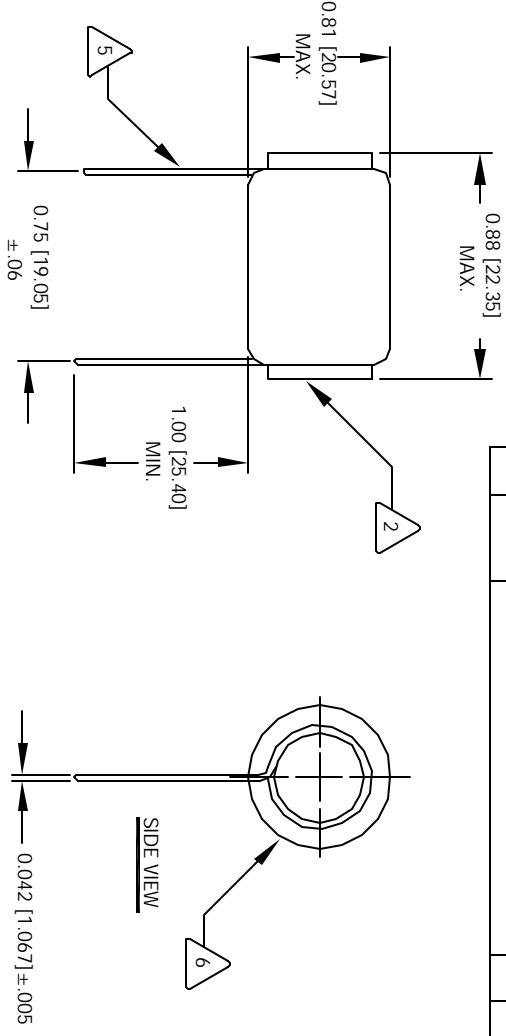


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS shall violate the provisions of this patent.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TOK	2/28/05	JLAV	2/29/05



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION IN APPROX


5 REMOVE INSULATION AND TIN LEADS

4 CONSTRUCTION:
HI-POT CORE TO WIRE = 750 VDC
MAX TEMP RISE AT RATED CURRENT = 35 °C
DCR = 45.0 MILLI-OHMS MAX
MAX L DROP AT RATED CURRENT = 5%
RATED CURRENT (DC) = 5.6 AMPS.
L = 50.0 uH ± 10% @ 1KHZ, 0.25 mV, 0.4DC
SPECIFICATIONS @ 25°C

3 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
CWS BYTE-MARK OR OTHER APPROVED PART
CORE: FERRITE ROD

1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.



CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SIGN	X	PARTS LIST	
UNLESS OTHERWISE SPECIFIED			
PALDING AND TOLERANCE PER ANSI Y14.4M			
ALL DIMENSIONS ARE IN INCHES AND (DIMENSIONS)			
TOLERANCE INCHES HOLE ±.002 X ±.015 TOLERANCE METRIC HOLE ±.027 X ±.38			
ANGLE PROJECTION			
DO NOT SCALE DRAWING			
DATE	DATE	DATE	DATE
2/28/05	2/28/05	2/28/05	2/28/05
TOK	JLAV	JLAV	JLAV
DATE	DATE	DATE	DATE
2/28/05	2/28/05	2/28/05	2/28/05
APPR.	APPR.	APPR.	APPR.
JLAV	JLAV	JLAV	JLAV
DATE	DATE	DATE	DATE
2/28/05	2/28/05	2/28/05	2/28/05
SIZE	SCALE	REV	REV
B	2=1	A	A
1	1	1	1