


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	SCALE & DATE		
			BY	DATE	CHK
A		PRODUCTION RELEASE	TKK	2/28/05	JLW



SCHEMATIC

6 WHERE SHOWN, USING A PERMANENT MARKING METHOD
 MARK PART NUMBER AND REVISION IN APPROX

5 REMOVE INSULATION AND TIN LEADS


4 CONSTRUCTION:
 HI-POT CORE TO WIRE = 750 VDC
 MAX TEMP RISE AT RATED CURRENT = 35 °C

3 SPECIFICATIONS @ 25°C
 DCR = 46.0 MILLI-OHMS MAX
 MAX L DROP AT RATED CURRENT = 5%
 RATED CURRENT (DC) = 6.3 AMPS.
 L = 150.0 uH ± 10% @ 1KHz, 0.25 mV, 0 ADC

2 CORE: FERRITE ROD


1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

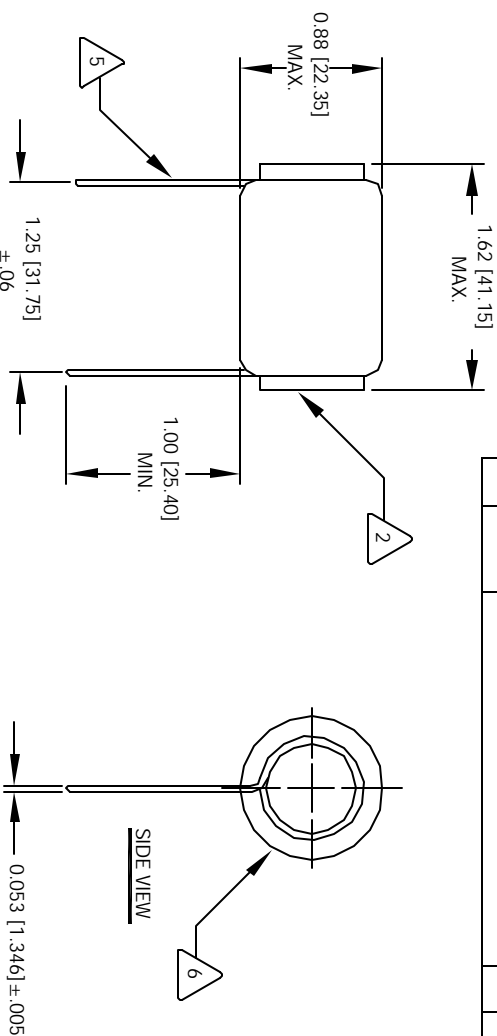

FRONT VIEW

SIDE VIEW



MOUTING HOLES PATTERN

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SIGN	X	PARTS LIST	
UNLESS OTHERWISE SPECIFIED		CWS Coil Winding Specialist	
PALSUNG AND TOLERANCE PER ANSI Y14.4M		1510 E. Edinger Ave	
ALL DIMENSIONS ARE IN INCHES AND (DIMENSIONS)		UNIT: B. SANTA ANA, CA. 92705	
DRAWN	DATE	TITLE:	
TKK	2/28/05	High Current RF Chokes	
CHKD	DATE	SIZE	INCH. NO.
JLW	2/28/05	B	J-5514
ENGR	DATE	SCALE	REV
KSLUM	2/28/05	2=1	A
APPR.	DATE	SHEET 1 OF 1	
JLW	2/28/05		