



The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	DATE
A		PRODUCTION RELEASE	1/20/05	JLU	1/20/05

VERTICAL MOUNT

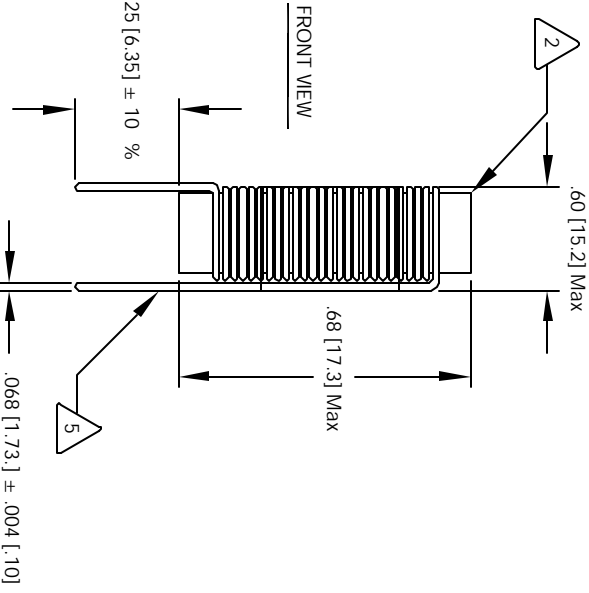

MOUNTING HOLES PATTERN

- 1 MATERIAL: WIRE INSULATION - UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- 2 CORE: MANGANESE ZINC FERRITE ROD
- 3 SPECIFICATIONS: MAX RMS (DC) CURRENT = 25 AMPS
 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
 CWS BYTEMARK OR OTHER APPROVED PART
 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
 CWS BYTEMARK OR OTHER APPROVED PART
 CORE: MANGANESE ZINC FERRITE ROD

INDUCTANCE DROPS 10% FROM ZERO ADC VALUE
 SATURATION CURRENT IS THE CURRENT AT WHICH THE
 TEMP. RISE ABOVE AMBIENT OF 25 °C.
 MAX DC CURRENT IS AVERAGE CURRENT FOR 40 °C
 NOTES:
 EPOXY LEADS TO CORE
 .05" ABOVE THE CORE EDGE, AND
 REMOVE INSULATION AND TIN LEADS

FRONT VIEW

SCHEMATIC

WIND COILS EVENLY SPACED

CONSTRUCTION:

MAX TEMP RISE AT MAX CURRENT = 40 °C
 HI-POT TEST FOR CORE TO WINDING = 500 VDC
 DCR = 2 MILLI-OHMS MAX @ 25 °C
 SATURATION CURRENT = 25 AMPS
 L = 1.0 UH ± 10% . 15.75 KHZ, 0.1 Vrms, 0 ADC;

DO NOT SCALE DRAWING

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SOLIDWORKS SIGN	X	PARTS LIST	
DATE	DATE	CWS Coil Winding Specialist. 1510 E. Edinger Ave. Unit B, Santa Ana, CA, 92705	
TKK	1/20/05	Power Chokes	
JLU	1/20/05	Vertical Mount	
KSUJ	1/20/05	SIZE DIM. IN.	REV
JLU	1/20/05	B	A
		SCALE 2=1	SHEET 1 OF 1