



The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	DATE
A		PRODUCTION RELEASE	1/14/05

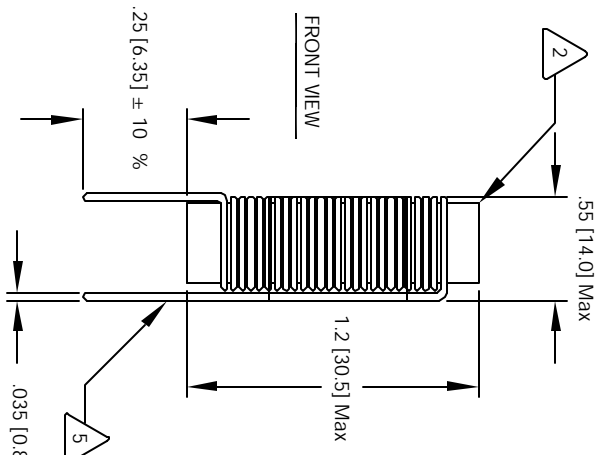

1
2
MOUNTING HOLES PATTERN

- 1 MATERIAL: WIRE INSULATION - UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- 2 RATING CLASS B (130°C) REQUIRED
- 3 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
CWS BYTE-MARK OR OTHER APPROVED PART
CORE: MANGANESE ZINC FERRITE ROD
- 4 WIND COILS EVENLY SPACED
- 5 CONSTRUCTION:
MAX TEMP RISE AT MAX CURRENT = 40 °C
HI-POT TEST FOR CORE TO WINDING = 500 VDC
DCR = 72 MILLI-OHMS MAX @ 25 °C
SATURATION CURRENT = 3 AMPS
L = 100 uH ± 10% , 15.75 KHz, 0.1 Vrms, 0 ADC;
SPECIFICATIONS: MAX RMS (DC) CURRENT = 3 AMPS
- 6 EPOXY LEADS TO CORE
.05" ABOVE THE CORE EDGE, AND
REMOVE INSULATION AND TIN LEADS

INDUCTANCE DROPS 10% FROM ZERO ADC VALUE
SATURATION CURRENT IS THE CURRENT AT WHICH THE
TEMP. RISE ABOVE AMBIENT OF 25 °C.
MAX DC CURRENT IS AVERAGE CURRENT FOR 40 °C
NOTES:
DIMENSIONS IN INCHES [MM]. READ FROM BOTTOM UP

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SOLIDWORKS SIGN	X	PARTS LIST	
UNLESS OTHERWISE SPECIFIED		COLS COM, INC	
TOLERANCE PER NAS 11.5M		1510 E. Edinger Ave	
ALL DIMENSIONS ARE IN NOTES AND DIMENSIONS		Unit: B, Santa Ana, CA, 92705	
TOLERANCE INCHES		Power Chokes	
XXXXX.XXX ±.XX ±.015		Vertical Mount	
TOLERANCE METERS		SIZE DIM. IN.	
XXXXX.XXX ±.XX ±.38		B	
ANGLE PROJECTION		SCALE	
DO NOT SCALE DRAWING		2=1	
CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
TKK		Power Chokes	
JLJU	1/14/05	Vertical Mount	
APPR. JLJU	1/14/05	PV-104-03	REV A
			SHEET 1 OF 1