





The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY					
REV	ECN	DESCRIPTION	SIGN & DATE		
A		PRE-PRODUCTION RELEASE	DR	DATE	DATE
			TKK	4/7/03	4/8/03

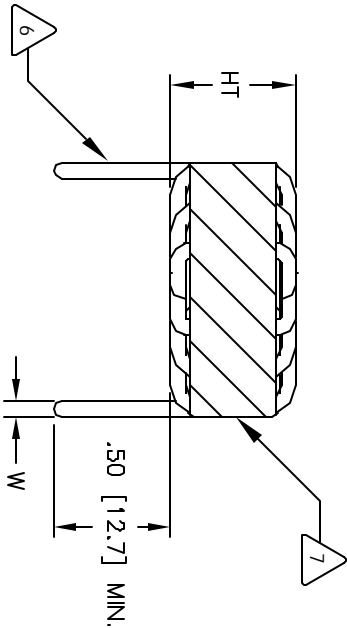

SCHEMATIC

- SPACER : UL 94-V0, NYLON 6/6
- WIND BOTH COILS EVENLY SPACED
- CONSTRUCTION:
(TO ENSURE INTERGRITY OF WINDING SEPARATION)
HI-POT TEST FOR INTERWINDING ISOLATION = 1250VDC.
DCR = MEASURED ON EACH WINDING USING QUADTECH 2200
L = MEASURED ON EACH WINDING, AT 10 KHz, 250 mv
- SPECIFICATIONS:

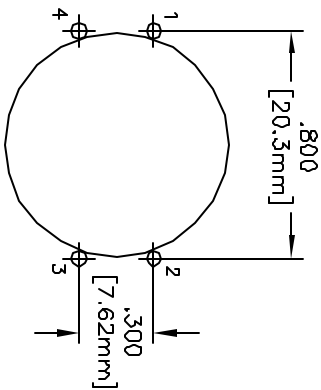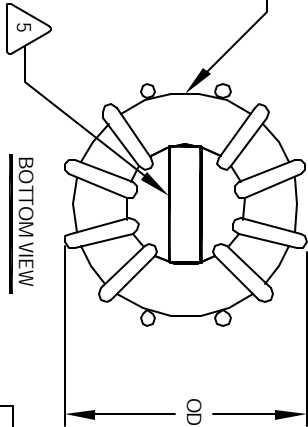

MOUNTING HOLES PATTERN

WIRE: UL RECOGNIZED 155 °C OR 200°C (PREFERRED) RATED MAGNET WIRE

CWS BYTEMARK OR OTHER APPROVED PART

- CORE: COATED FERRITE TOROID, HIGH PERM MNZN

RATING CLASS B (130°C MIN.) REQUIRED

- MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
PARTS LIST			
AUTOCAD	X	CWS Coil Winding Specialist.	
SOLIDWORKS		www.cowis.com	
SIGN	DATE	Unit B, Santa Ana, CA. 92705	
DRWN	3/7/03	TITLE:	
TKK	3/8/03	Common Mode Line Chokes	
JLUU	3/8/03	SIZE Dwg. No.	
DKR	3/8/03	CM-SERIES	
KSUU	3/8/03	REV A	
APPR	3/8/03	SCALE	
JLUU	3/8/03	2=1	
DO NOT SCALE DRAWING			SHEET 1 OF 1