
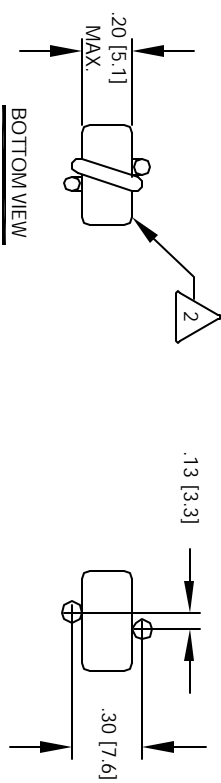
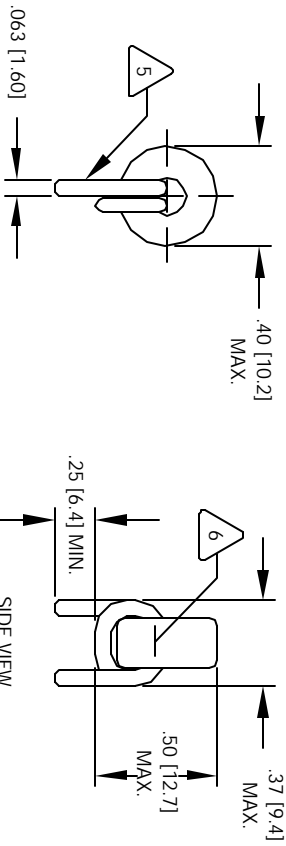


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
C		PRODUCTION RELEASE	1/28/05	TKK	JLU	1/28/05



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD IF APPLICABLE, MARK PART NUMBER AND REVISION IN APPROX

5 REMOVE INSULATION AND TIN LEADS APPROX. 0.50 INCH

4 CORE AND EVENLY SPACED WIND 2 TURNS, # 14 AWG, SINGLE LAYER ON CONSTRUCTION:

3 HI-POT TEST FOR CORE TO WINDING ISOLATION=250VDC RATED CURRENT = 40 AMPS/COIL DCR = 0.6 mHMS MAX./COIL L = 0.140 uH MIN, 1 KHZ, 1Vrms. SPECIFICATIONS @ 25°C :

2 OUTER WRAP: NONE WIRE: UL RECOGNIZED 200°C RATING MAGNET WIRE CWS BYTEMARK OR OTHER APPROVED PART CORE: COATED POWDER CORE

1 CLASS B (130°C) REQUIRED MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
			COILS.COM, INC	
			CWS Coil Winding Specialist	
			1510 E. Edinger Ave	
			Unit B, Santa Ana, CA, 92705	
			TITLE:	
			Differential Mode Choke	
			(40 AMPS)	
			SIZE:	
			B	
			SCALE:	
			1=2	
			REV:	
			C	
			DATE:	
			1/28/05	
			BY:	
			TKK	
			CHK:	
			JLU	
			DATE:	
			1/28/05	
			SHEET	
			1 OF 1	