


All Dimensions in mm
1 inch = 2.54mm

WIRING DIAGRAM

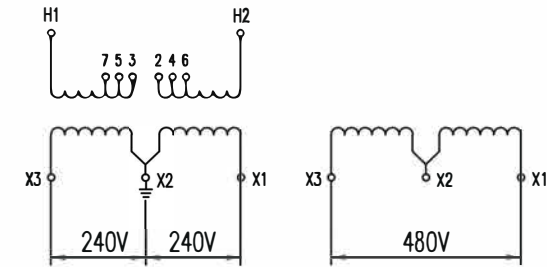

15	Transformer Oil	FR3 Natural Oil
14	Copper Strip	1
13	LV Bushing	3
12	HV Bushing	2
11	Fastening Ring	1
10	Support Lug	2
9	Lifting Lugs	2
8	Tap Changer	5 Positions
7	KVA Marking	50
6	Label	1
5	Name Plate	1
4	Grounding Terminal	1
3	Pressure Relief Device	1
2	Tank Cover	1
1	Core & Coil assembly	Copper Windings DoE 2016 Efficiency

NO.	ITEM DESCRIPTION	QTY OR REMARK
SPPM-50KVA/4160Y/2400V		Coil Winding Specialist Inc 353 West Grove Ave, Orange, CA 92865
DRAWN	CHECKED	APPROVED
FEB 2025		FIRST ANGLE PROJECTION SCALE 1 CWS-50-1PP-4.16 50 KVA Single Phase , 60 Hz 4160V/2400V to 240/480V
		REV. NO.