



The information contained in this drawing is the sole property of Coil Winding Specialist. Any reproduction in part or whole without written permission of Coil Winding Specialist is prohibited.




SCHEMATIC


- 7 BUILT TO ROHS COMPLIANCE
 - 6 SHOW PART NUMBER AND REVISION
 - 5 VARNISH PART AND CURE
APPLY SILICON WHERE SHOWN
 - 4 CONSTRUCTION
 - 3 SPECIFICATIONS:
 - VARNISHED WITH DOLPH
 - EPOXY: UNIBOND OR CWS APPROVED PART
 - OUTER WRAP: 3M GLASS CLOTH
 - WIRE: UL RECOGNIZED 200°C RATED MAGNET WIRE
 - CORE: GAPPED SENDUST/KOOL MU
 - 2 INSULATION CLASS 200°C REQUIRED
 - 1 MATERIAL: UL RECOGNIZED FOR FLAMMABILITY
- NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.
CAGE CODE: 5DME2

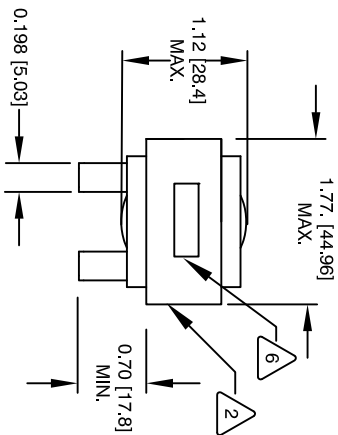


FRONT VIEW



BOTTOM VIEW



SIDE VIEW

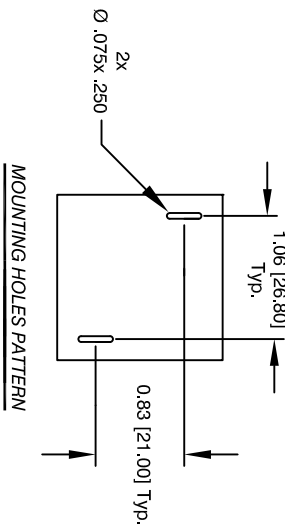

MOUNTING HOLES PATTERN

REVISION HISTORY			
REV	ECN	DESCRIPTION	SIGN & DATE
B	130830	REMOVE MARKING METHOD. FIX DIMENSIONS ON PITCH OF THE LEADS	AK 9/20/13
C		UPDATED ELECTRICAL SPEC.	TM 11/18/18
D		ADDED DC BIAS TABLE	TM 03/01/21

DC BIAS (AMP)	L@10KHz (REF)
0	100uH
5	96uH
10	91uH
15	87uH
20	76uH
25	63uH
30	52uH

DC BIAS TABLE

QTY	CODE	IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
PARTS LIST					
AUTOCAD		X			
SOLIDWORKS					
SIGN		DATE		TITLE:	
DRAWN		8/16/07		www.coilws.com	
CHECKED		8/16/07		Coil Winding Specialist, Inc.	
ENGR.		8/16/07		353 W. GROVE AVENUE	
APPR.		8/16/07		ORANGE, CA. 92865	
DO NOT SCALE DRAWING		SCALE		SHEET 1 OF 1	